

### HIGH EFFICIENCY RECTIFIER

VOLTAGE RANGE: 200 V  
CURRENT: 2.0 A


#### FEATURES

- ◇ Low cost
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with alcohol,Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

#### MECHANICAL DATA

- ◇ Case: JEDEC DO-15, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.014 ounces, 0.39 grams
- ◇ Mounting position: Any

#### DO - 15

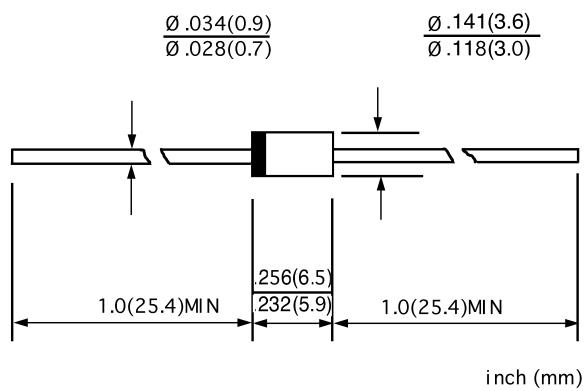

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		RN2Z	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	200	V
Maximum RMS voltage	$V_{RMS}$	140	
Maximum DC blocking voltage	$V_{DC}$	200	
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$	2.0	A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	$I_{FSM}$	60.0	A
Maximum instantaneous forward voltage @ 2.0 A	$V_F$	0.92	V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	$I_R$	50.0 1000.0	$\mu\text{A}$
Maximum reverse recovery time (Note1)	$t_{rr}$	50	ns
Typical junction capacitance (Note2)	$C_J$	50	pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	50	$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$	- 55 ---- + 150	$^\circ\text{C}$
Storage temperature range	$T_{STG}$	- 55 ---- + 150	$^\circ\text{C}$

NOTE: 1. Measured with  $I_F=0.5\text{A}$ ,  $I_R=1\text{A}$ ,  $I_{rr}=0.25\text{A}$ .

[www.galaxyen.com](http://www.galaxyen.com)



2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

# RATINGS AND CHARACTERISTIC CURVES

RN2Z(Z)


**FIG.1 – TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC**

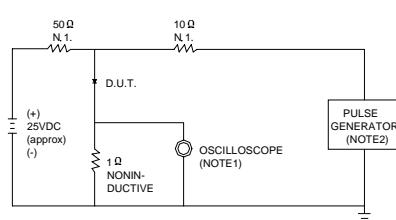

NOTES: 1. RISE TIME = 7ns MAX. INPUT IMPEDANCE = 1MΩ. 22pF.  
2. RISE TIME = 10ns MAX. SOURCE IMPEDANCE = 50 Ω.

SET TIME BASE FOR 10/20 ns/cm


**FIG.2 – TYPICAL FORWARD CHARACTERISTIC**

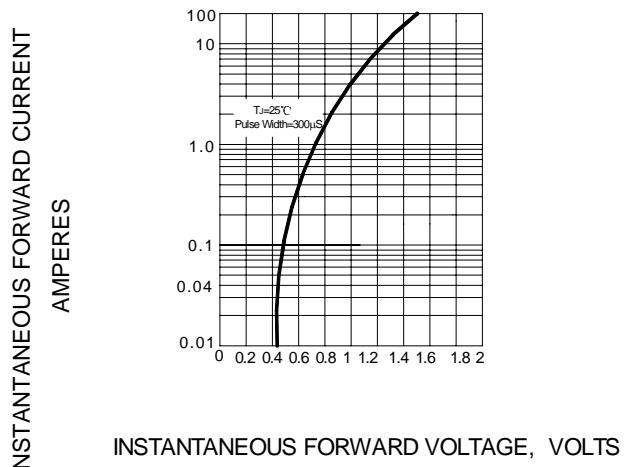

INSTANTANEOUS FORWARD CURRENT  
AMPERES


AVERAGE FORWARD RECTIFIED CURRENT  
AMPERES

**FIG.3 – FORWARD DERATING CURVE**

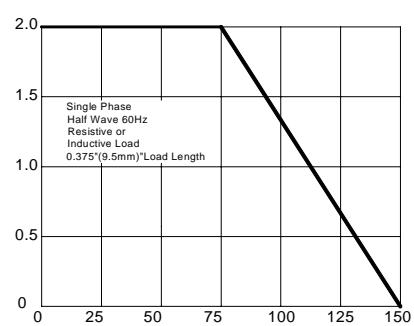

AMBIENT TEMPERATURE, °C


**FIG.4 – TYPICAL JUNCTION CAPACITANCE**

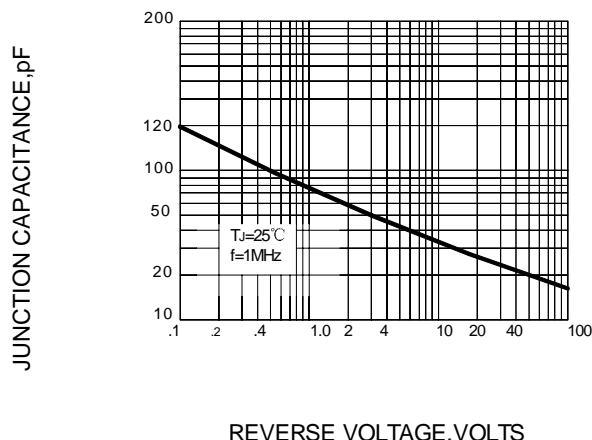

JUNCTION CAPACITANCE,pF

PEAK FORWARD SURGE CURRENT  
AMPERES

**FIG.5 – PEAK FORWARD SURGE CURRENT**

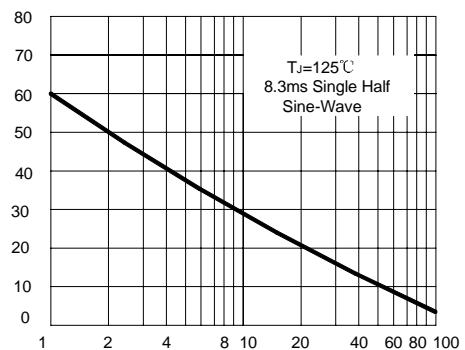

NUMBER OF CYCLES AT 60Hz