


● Features:

1. Chip material: GaAsP/GaP(Yellow)
and GaP/GaP (Green)
2. Emitted color :yellow and green
3. Lens Appearance : White Diffused
4. Low power consumption.
5. High efficiency.
6. Versatile mounting on P.C. Board or panel.
7. Low current requirement.
8. 3mm diameter package
9. This product don't contained restriction substance, compliance ROHS standard.

● Applications:

1. TV set
2. Monitor
3. Telephone
4. Computer
5. Circuit board

● Package Dimensions:

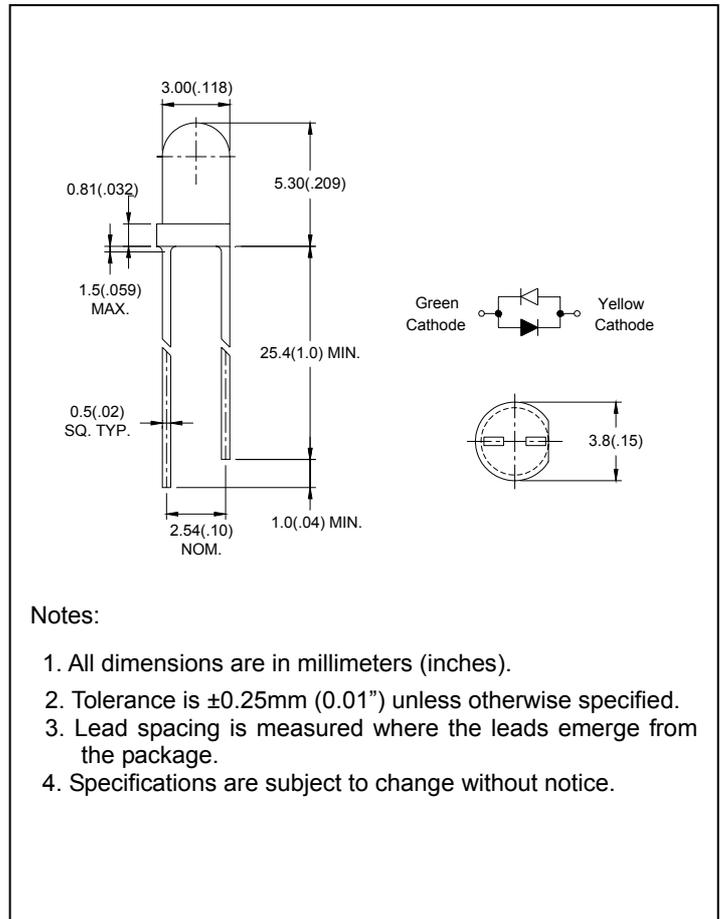

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (0.01") unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

● Absolute Maximum Ratings($T_a=25^\circ\text{C}$)

Parameter	Symbol	Yellow	Green	Unit
Power Dissipation	P_d	80	80	mW
Forward Current	I_F	30	30	mA
Peak Forward Current* ¹	I_{FP}	150	150	mA
Reverse Voltage	V_R	5		V
Operating Temperature	T_{opr}	-40°C~80°C		
Storage Temperature	T_{stg}	-40°C~85°C		
Soldering Temperature	T_{sol}	260°C (for 5 seconds)		

*¹Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width.

● Electrical and optical characteristics(Ta=25°C)

Parameter	Symbol	Condition	Color	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=20\text{mA}$	Yellow Green	-	2.1 2.2	2.6 2.6	V
Luminous Intensity	I_v	$I_F=20\text{mA}$	Yellow Green	-	15 30	-	mcd
Reverse Current	I_R	$V_R=5\text{V}$	Yellow Green	-	-	100	μA
Peak Wave Length	λ_p	$I_F=20\text{mA}$	Yellow Green	-	585 568	-	nm
Dominant Wave Length	λ_d	$I_F=20\text{mA}$	Yellow Green	582 560	- -	595 576	nm
Spectral Line Half-width	$\Delta \lambda$	$I_F=20\text{mA}$	Yellow Green	-	35 30	-	nm
Viewing Angle	$2\theta_{1/2}$	$I_F=20\text{mA}$	Yellow Green	-	45	-	deg

● Typical Electro-Optical Characteristics Curves

