



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

CATTEN-01R0 1dB Attenuator SMA 50 Ohm DC to 3GHz



Temperature Range: -40°C to +85°C
Rated Power: 1 Watt Max
Freq Range: DC - 3GHz
VSWR: 1:1.3 Max
Impedance: 50 Ohms
Attenuation Tolerance: ± 0.3 dB



Actual Size

The Attenuator Series offers end users a rugged SMA attenuator housing for easy connection. Attenuators are available from 1dB to 20dB with 1 Watt power dissipation. Tolerance matching is used to provide superior temperature tracking to individual components. Attenuator frequency range from DC to 3GHz.



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913

PHONE: 239-561-3311 • 800-237-3061

FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev: B
Date: 04-07-08

CATTEN-01R0


1dB Attenuator

SMA 50 Ohm

DC to 3GHz

| Part Number | Attenuation | Power (Max) |
|-------------|-------------|-------------|
| CATTEN-01R0 | 1 dB | 1 Watt |
| CATTEN-01R5 | 1.5 dB | 1 Watt |
| CATTEN-02R0 | 2 dB | 1 Watt |
| CATTEN-03R0 | 3 dB | 1 Watt |
| CATTEN-04R0 | 4 dB | 1 Watt |
| CATTEN-05R0 | 5 dB | 1 Watt |
| CATTEN-06R0 | 6 dB | 1 Watt |
| CATTEN-07R0 | 7dB | 1 Watt |
| CATTEN-08R0 | 8dB | 1 Watt |
| CATTEN-09R0 | 9dB | 1 Watt |
| CATTEN-0100 | 10 dB | 1 Watt |
| CATTEN-0150 | 15 dB | 0.5 Watt |
| CATTEN-0200 | 20 dB | 0.5 Watt |

| 1 dB Data | | Return Loss | |
|-------------|------------|-------------|-------------|
| Freq. (MHz) | Atten (dB) | Male (dB) | Female (dB) |
| 0.3 | 0.95 | 56 | 55 |
| 0.5 | 0.94 | 56 | 55 |
| 0.8 | 0.94 | 56 | 55 |
| 1.0 | 0.94 | 56 | 55 |
| 5.0 | 0.93 | 56 | 55 |
| 10.0 | 0.94 | 56 | 55 |
| 20.0 | 0.93 | 56 | 54 |
| 50.0 | 0.93 | 53 | 52 |
| 100.0 | 0.94 | 48 | 47 |
| 200.0 | 0.95 | 43 | 42 |
| 300.0 | 0.98 | 40 | 39 |
| 400.0 | 0.99 | 38 | 37 |
| 500.0 | 0.98 | 36 | 36 |
| 600.0 | 0.98 | 34 | 34 |
| 700.0 | 1.00 | 33 | 33 |
| 800.0 | 0.99 | 32 | 32 |
| 900.0 | 1.02 | 31 | 31 |
| 1000.0 | 0.99 | 30 | 30 |
| 1500.0 | 1.05 | 26 | 27 |
| 2000.0 | 1.11 | 22 | 22 |
| 2500.0 | 1.03 | 19 | 19 |
| 3000.0 | 1.29 | 17 | 16 |

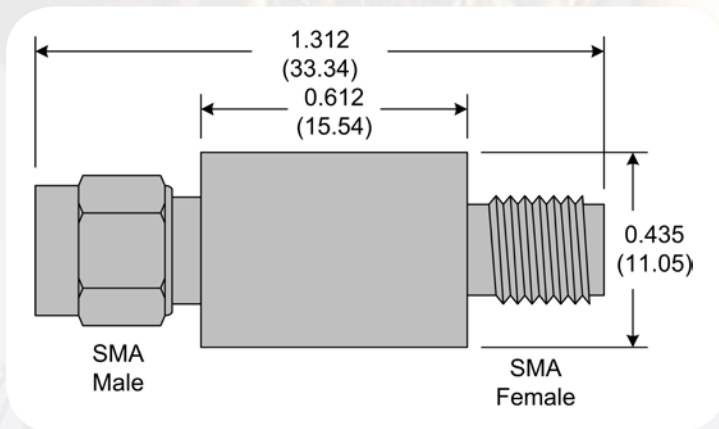

| TEST | Condition of Test | Test Results | |
|---|---|--------------|-------------|
| | | 0.5dB to 5dB | 6dB to 20dB |
| Endurance Test at 70°C per EIA 575-3.14 | 1000 hours at 70°C, 1.5 hrs "ON", 0.5 hrs "OFF" | ± 0.2 dB | ± 0.3 dB |
| Overload per EIA 575-3.6 | Short time overload | ± 0.2 dB | ± 0.3 dB |
| Thermal Shock | per EIA 575-3.5 | ± 0.2 dB | ± 0.3 dB |
| Moisture Resistance | per EIA 575-3.10 | ± 0.2 dB | ± 0.3 dB |
| High Temperature Exposure | per EIA 575-3.7 | ± 0.2 dB | ± 0.3 dB |
| Low Temperature Exposure | per EIA 575-3.12 | ± 0.2 dB | ± 0.3 dB |