

STULPI01A STULPI01B

HS USB ULPI transceiver

Data Brief

Features

- Fully compliant with:
 Universal Serial Bus Specification Revision
 2.0, On-The-Go Supplement to the USB 2.0
 Spec. Rev. 1.0a, UTMI+ Low Pin Interface
 transceiver specification 1.1
- Fully compliant with ULPI 1.1 register set
- Supports high-speed (480 Mbit/s), full-speed (12 Mbit/s) and low-speed (1.5 Mbit/s) modes of operation
- Integrated HS termination and FS/LS/OTG pull-up/ pull-down resistors
- Supports both single (SDR) and Dual-edge data rate (DDR) on ULPI interface
- Supports Session Request Protocol (SRP) and Host Negotiation Protocol (HNP) for dual-roledevice features
- Ability to control ext. charge pump for higher V_{BUS} currents
- External square wave clock with 1V8VIO amplitude must be applied to oscillator input XI
- On request 19.2 MHz or 26 MHz oscillator frequency, external crystal version, can be provided
- Supports 2.7 V UART mode
- Single supply, +3 V to +4.5 V voltage range
- Integrated dual voltage regulator to supply internal circuits with stable 3.3 V and 1.2 V
- Integrated over current detector
- Integrated USB2.0 §7.1.1 "Short Circuit Withstand" protection
- Power down mode with very low power consumption for battery-powered devices
- -40°C to 85°C operating temperature range
- Available in µTFBGA36 RoHS package



Applications

- Mobile phones
- PDAs
- MP3 players
- Digital still cameras
- Video camera
- Printer
- Navigation system
- Set top box

Description


The STULPI01 is a high-speed ULPI (UTMI+ Low Pin Interface), USB OTG transceiver which provides complete physical layer solution for any high speed USB host, device or OTG dual role core. It allows USB ASICs to interface with the physical layer of the USB through 12-pin or 8-pin interface. It contains V_{BUS} comparators, ID line detector, complete ULPI register map and interrupt generator, and the USB differential driver and receivers. The STULPI01 transceiver is suitable for mobile applications and battery powered devices thanks to its low power consumption and power down operating mode.

1 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK[®] packages. These packages have a Lead-free second level interconnect. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

TFBGA36 mechanical data

| Dim. | mm. | | | mils. | | |
|------|------|------|------|-------|-------|-------|
| | Min. | Тур. | Max. | Min. | Тур. | Max. |
| А | 1.0 | 1.1 | 1.16 | 39.4 | 43.3 | 45.7 |
| A1 | | | 0.25 | | | 9.8 |
| A2 | 0.78 | | 0.86 | 30.7 | | 33.9 |
| b | 0.25 | 0.30 | 0.35 | 9.8 | 11.8 | 13.8 |
| D | 3.5 | 3.6 | 3.7 | 137.8 | 141.7 | 145.7 |
| D1 | | 2.5 | | | 98.4 | |
| E | 3.5 | 3.6 | 3.7 | 137.8 | 141.7 | 145.7 |
| E1 | | 2.5 | | | 98.4 | |
| е | | 0.5 | | | 19.7 | |
| F | | 0.55 | | | 21.7 | |

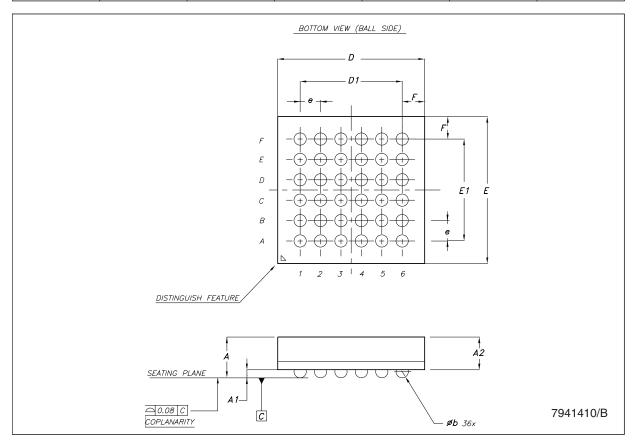

2 Order code

Table 1. Order code

| Part numbers | Key differences | Package | Packaging |
|--------------|---|--------------------------|---------------------|
| STULPI01ATBR | f _{OSC} =19.2MHz, CSn/PWRDN=0 "ON" | μTFBGA36 (3.6x3.6mm Typ) | 3000 parts per reel |
| STULPI01BTBR | f _{OSC} =26MHz, CSn/PWRDN=0 "ON" | μTFBGA36 (3.6x3.6mm Typ) | 3000 parts per reel |

STULPI01A - STULPI01B Revision history

3 Revision history

Table 2. Document revision history

| Date | Revision | Changes |
|-------------|----------|-------------|
| 31-Aug-2007 | 1 | First Issue |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

4