

# SMD 1842.5MHz SAW FILTER

AFS1842.5W01-TS4

\*RoHS COMPLIANT



3 x 3 x 1.5mm

## STANDARD SPECIFICATIONS:

CHARACTERISTICS	UNIT	MIN.	TYP.	MAX.
Center Frequency Fc	MHz	-	1842.5	-
Pass Bandwidth	MHz	-	75	-
Insertion Loss				
1805 ~ 1815 MHz @ (15°C ~ +70°C)	dB	3.3	-	-
1805 ~ 1815 MHz @ (-20°C ~ 15°C)	dB	3.7	-	-
1815 ~ 1870 MHz	dB	-	-	3.0
1870 ~ 1880 MHz	dB	-	-	3.6
Relative Attenuation				
0 ~ 1720 MHz	dB	20	-	-
1720 ~ 1765 MHz	dB	25	-	-
1765 ~ 1785 MHz	dB	8	-	-
1920 ~ 1980 MHz	dB	15	-	-
1980 ~ 2410 MHz	dB	17	-	-
2410 ~ 3120 MHz	dB	20	-	-
3120 ~ 4000 MHz	dB	17	-	-
DC Voltage	V	±10		
Source Power	dBm	15		
Operating Temperature	°C	-20°C to +70°C		
Storage Temperature	°C	-40°C to +85°C		
Return Loss @ 1805 ~ 1880	MHz	6	-	-


Electrostatic Sensitive Device. Handle with precaution.

## MARKING:

- AFS1842 (1842.5 Frequency in MHz)
- ZYX (ZY: Date code Z for month from A to L; Y for year, i.e. 4 for 2004  
X: Traceability code)

PIN NO.	CONNECTIONS
1	Ground
2	Input/Output
3	Ground
4	Ground
5	Input/Output
6	Ground

## TEST CIRCUIT:

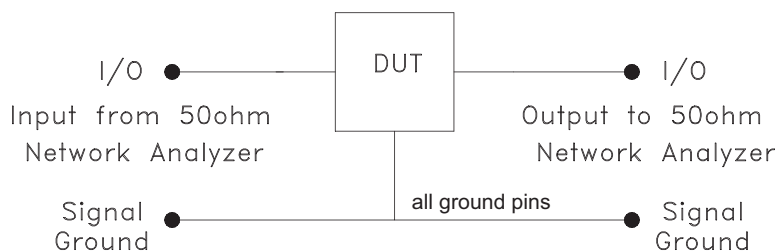

# SMD 1842.5MHz SAW FILTER


AFS1842.5W01-TS4

\*RoHS COMPLIANT



3 x 3 x 1.5mm

## ➤ FREQUENCY RESPONSE:

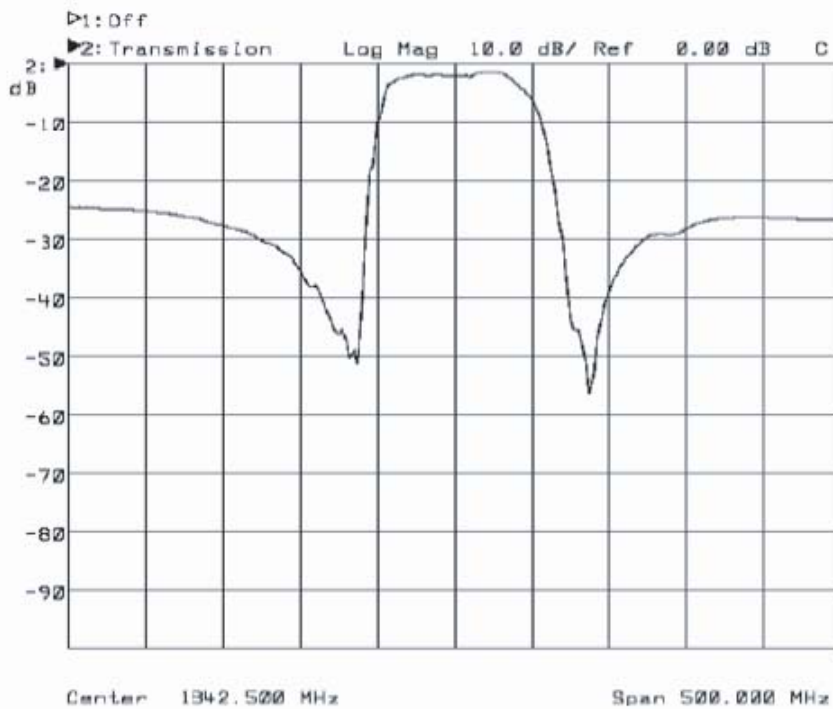

## ➤ OUTLINE DRAWING:

