



GPTG2044

PHASE CONTROLLED SCR

High reliability operation
 DC power supply
 AC drives

VOLTAGE UP TO	1600 V
AVERAGE CURRENT	440 A
SURGE CURRENT	5,5 kA

BLOCKING CHARACTERISTICS

Characteristic	Conditions	Value
V _{RRM}	Repetitive peak reverse voltage	1600 V
V _{RSM}	Non-repetitive peak reverse voltage	1700 V
V _{DRM}	Repetitive peak off-state voltage	1600 V
I _{IDRM}	Repetitive peak off-state current, max.	V _{DRM} , single phase, half wave, T _j = T _{jmax} 30 mA
I _{IRRM}	Repetitive peak reverse current, max.	V _{RRM} , single phase, half wave, T _j = T _{jmax} 30 mA

ON-STATE CHARACTERISTICS

I _{T(AV)}	Average on-state current	Sine wave, 180° conduction, Th = 55 °C	440 A
I _{T(RMS)}	R.M.S. on-state current	Sine wave, 180° conduction, Th = 55 °C	691 A
I _{TSM}	Surge on-state current	Non rep. half sine wave, 50 Hz, V _R = 0 V, T _j = T _{jmax}	5,5 kA
I ² t	I ² t for fusing coordination		151 kA ² s
V _{T(TO)}	Threshold voltage	T _j = T _{jmax}	1,0 V
r _T	On-state slope resistance	T _j = T _{jmax}	0,8 mΩ
V _{TM}	Peak on-state voltage, max	On-state current I _T = 1000 A, T _j = T _{jmax}	1,75 V
I _H	Holding current, max	T _j = 25 °C	600 mA
I _L	Latching current, typ	T _j = 25 °C	1000 mA

TRIGGERING CHARACTERISTICS

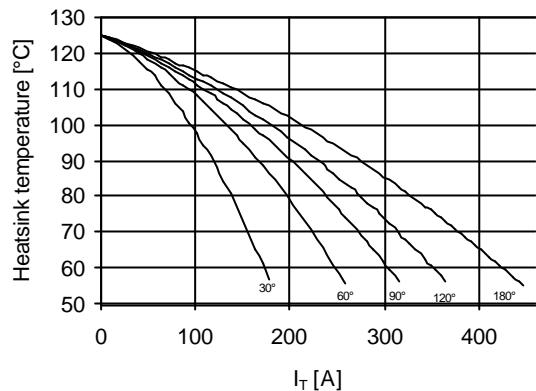
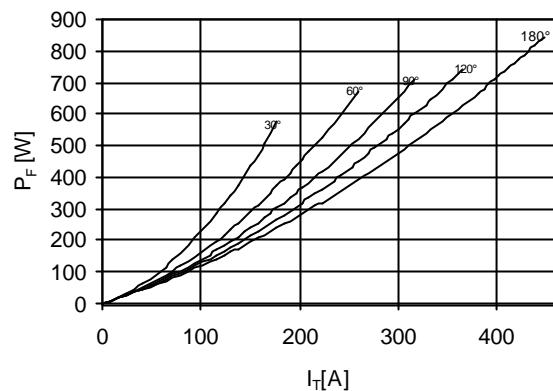
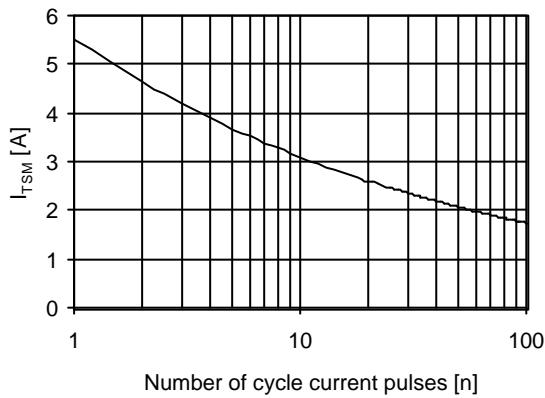
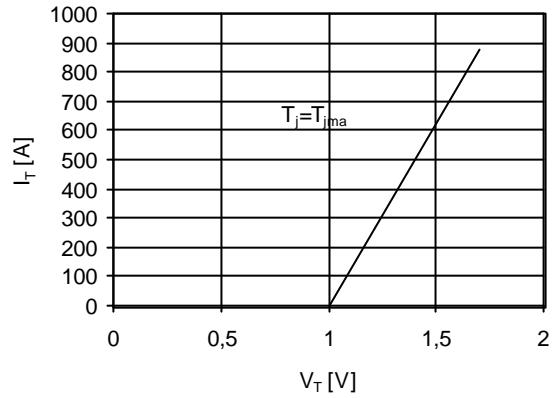
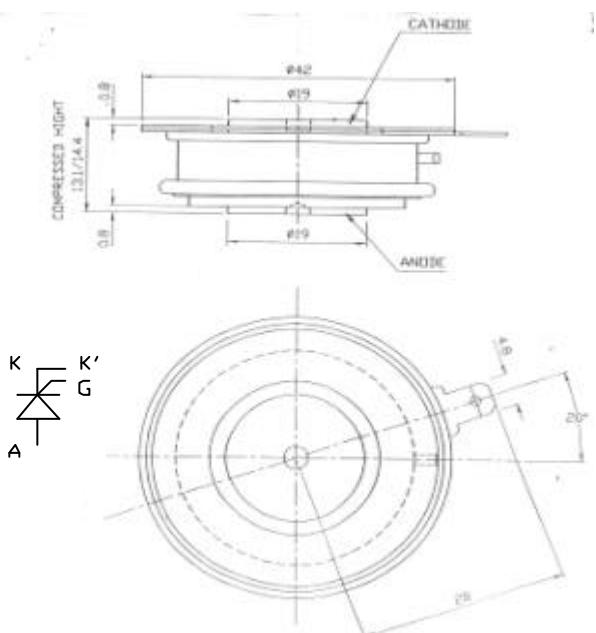
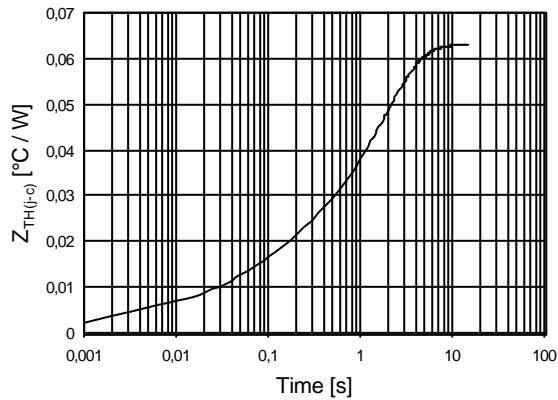
V _{GT}	Gate trigger voltage	T _j = 25 °C, V _D = 5 V	3,5 V
I _{GT}	Gate trigger current	T _j = 25 °C, V _D = 5 V	150 mA
V _{GD}	Non-trigger voltage	V _D = 67% V _{RRM} , T _j = T _{jmax}	0,25 V
P _{GM}	Peak gate power dissipation	Pulse width 0.5 ms	10 W
P _{G(AV)}	Average gate power dissipation		2 W
I _{FGM}	Peak gate current		3 A
V _{FGM}	Peak gate voltage (forward)		20 V
V _{RGm}	Peak gate voltage (reverse)		5 V

SWITCHING CHARACTERISTICS

d <i>i</i> /dt	Critical rate of rise of on-state current	Repetitive - T _j = T _{jmax}	200 A/μs
dV/dt	Critical rate of rise of off-state voltage	T _j = T _{jmax}	500 V/μs
t _q	Turn-off time, typ	T _j = T _{jmax} , I _T = 320 A, d <i>i</i> /dt = -12.5 A/μs VR = 100 V, VD = 67% V _{DRM} , dV/dt = 20 V/μs	μs

THERMAL AND MECHANICAL CHARACTERISTICS

R _{th(j-c)}	Thermal resistance (junction to case)	Double side cooled	0,063 °C/W
R _{th(c-h)}	Thermal resistance (case to heatsink)	Double side cooled	0,020 °C/W
T _{jmax}	Max operating junction temperature		125 °C
T _{stg}	Storage temperature		-40 / 125 °C
F	Clamping force		4,5 kN
	Mass		70 g

Current rating - sine wave

Power loss - sine wave

**Maximum surge current
d.s. cooled**

On-state voltage drop

Thermal impedance (j-c)


In the interest of product improvement Green Power Solutions reserves the right to change any specification given in this data sheet without notice.