


SEMiX 904GB126HDs

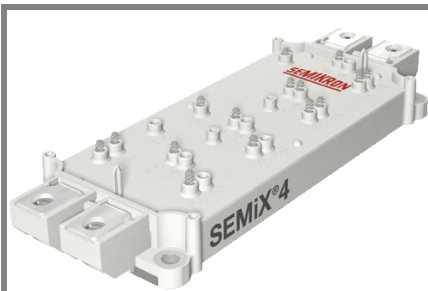

SEMiX® 4s

Trench IGBT Modules

SEMiX 904GB126HDs

Preliminary Data

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability

Typical Applications


- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperature limited to $T_C = 125^\circ\text{C}$ max.


Absolute Maximum Ratings		T _{case} = 25°C, unless otherwise specified		
Symbol	Conditions		Values	Units
IGBT				
V _{CES}	T _j = 25 °C		1200	V
I _C	T _j = 150 °C	T _c = 25 °C	820	A
		T _c = 80 °C	570	A
I _{CRM}	I _{CRM} =2xI _{Cnom}		1200	A
V _{GES}			± 20	V
t _{psc}	V _{CC} = 600 V; V _{GE} ≤ 20 V; T _j = 125 °C V _{CES} < 1200 V		10	µs
Inverse Diode				
I _F	T _j = 150 °C	T _c = 25 °C	755	A
		T _c = 80 °C	515	A
I _{FRM}	I _{FRM} =2xI _{Fnom}		1200	A
I _{FSM}	t _p = 10 ms; sin. T _j = 25 °C		3600	A
Module				
I _{t(RMS)}			600	A
T _{vj}			- 40 ... + 150	°C
T _{stg}			- 40 ... + 125	°C
V _{isol}	AC, 1 min.		4000	V

Characteristics		T _{case} = 25°C, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
V _{GE(th)}	V _{GE} = V _{CE} , I _C = 24 mA	5	5,8	6,5	V
I _{CES}	V _{GE} = 0 V, V _{CE} = V _{CES} T _J = 25 °C			0,3	mA
V _{CE0}	T _J = 25 °C T _J = 125 °C		1	1,2	V
			0,9	1,1	V
r _{CE}	V _{GE} = 15 V T _J = 25°C T _J = 125°C		1,2	1,6	mΩ
			1,8	2,3	mΩ
V _{CE(sat)}	I _{Cnom} = 600 A, V _{GE} = 15 V T _J = 25°C _{chiplev.} T _J = 125°C _{chiplev.}		1,7	2,15	V
			2	2,45	V
C _{ies}	V _{CE} = 25, V _{GE} = 0 V f = 1 MHz		43,1		nF
C _{oes}			2,25		nF
C _{res}			1,95		nF
Q _G	V _{GE} = -8 ... +15V		4800		nC
t _{d(on)}	R _{Gon} = 1,6 Ω	V _{CC} = 600V I _{Cnom} = 600A T _J = 125 °C		440	ns
t _r				85	ns
E _{on}			60	mJ	
t _{d(off)}	R _{Goff} = 1,6 Ω			710	ns
t _f				130	ns
E _{off}			88	mJ	
R _{th(j-c)}	per IGBT			0,05	K/W



GB

SEMiX 904GB126HDs

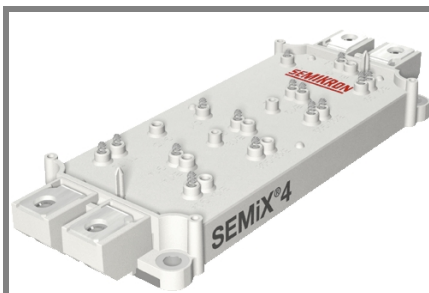

SEMiX® 4s

Trench IGBT Modules

SEMiX 904GB126HDs

Preliminary Data

Features

- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability

Typical Applications

- AC inverter drives
- UPS
- Electronic Welding


Remarks

- Case temperatur limited to $T_C=125^{\circ}\text{C}$ max.







Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
Inverse Diode					
$V_F = V_{EC}$	$I_{Fnom} = 600 \text{ A}; V_{GE} = 0 \text{ V}$				
	$T_j = 25^{\circ}\text{C}_{chiplev.}$		1,6	1,8	V
	$T_j = 125^{\circ}\text{C}_{chiplev.}$		1,6	1,8	V
V_{F0}					
	$T_j = 25^{\circ}\text{C}$		1	1,1	V
	$T_j = 125^{\circ}\text{C}$		0,8	0,9	V
r_F					
	$T_j = 25^{\circ}\text{C}$		1	1,2	mΩ
	$T_j = 125^{\circ}\text{C}$		1,3	1,5	mΩ
I_{RRM}	$I_{Fnom} = 600 \text{ A}$		625		A
Q_{rr}	$di/dt = 8400 \text{ A}/\mu\text{s}$		165		μC
E_{rr}	$V_{GE} = -15 \text{ V}; V_{CC} = 600 \text{ V}$		75		mJ
$R_{th(j-c)D}$	per diode			0,081	K/W
Module					
L_{CE}			22		nH
$R_{CC'+EE'}$	res., terminal-chip				
	$T_{case} = 25^{\circ}\text{C}$		0,7		mΩ
	$T_{case} = 125^{\circ}\text{C}$		1		mΩ
$R_{th(c-s)}$	per module		0,03		K/W
M_s	to heat sink (M5)	3		5	Nm
M_t	to terminals (M6)	2,5		5	Nm
w				400	g
Temperature sensor					
R_{100}	$T_c = 100^{\circ}\text{C}$ ($R_{25} = 5 \text{ k}\Omega$)		0,493±5%		kΩ
$B_{100/125}$	$R(T) = R_{100} \exp[B_{100/125}(1/T - 1/T_{100})]$; $T[\text{K}]$		3550±2%		K







This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.




GB

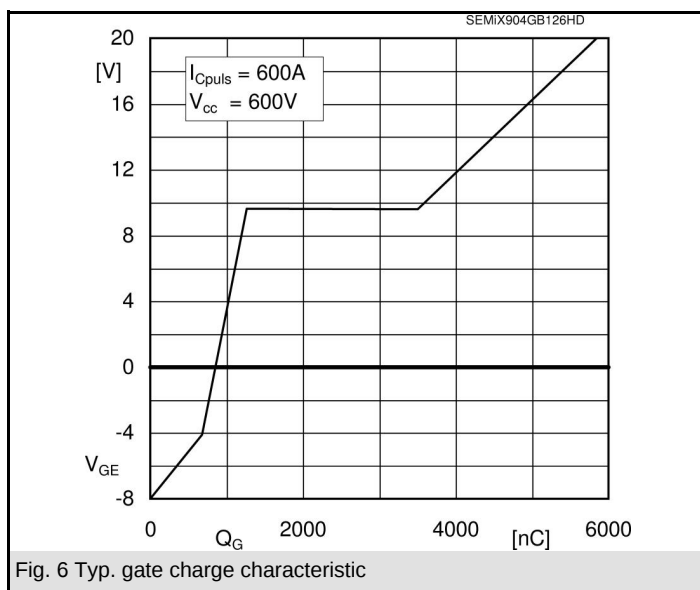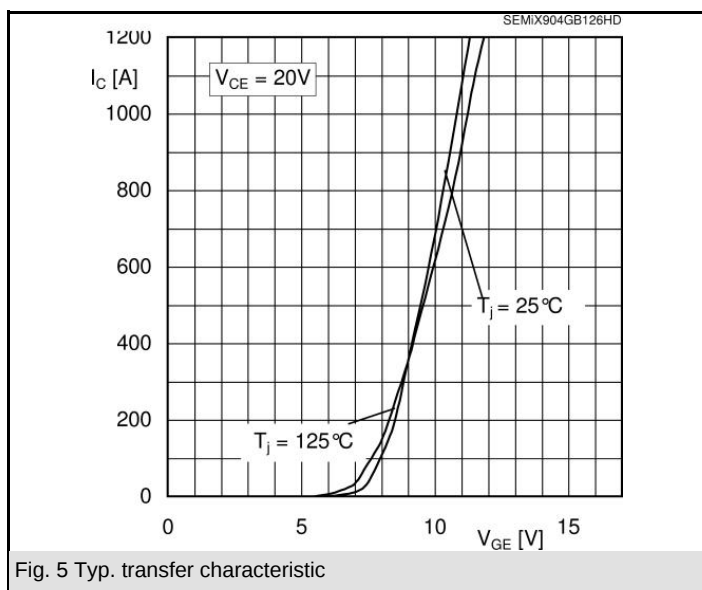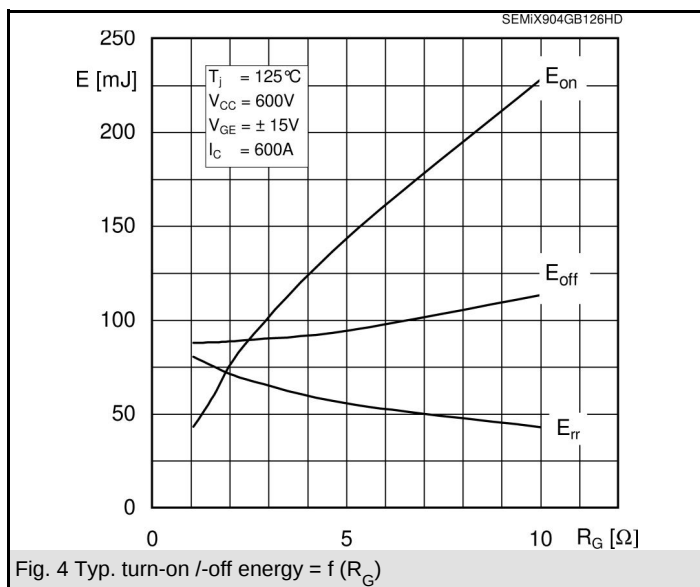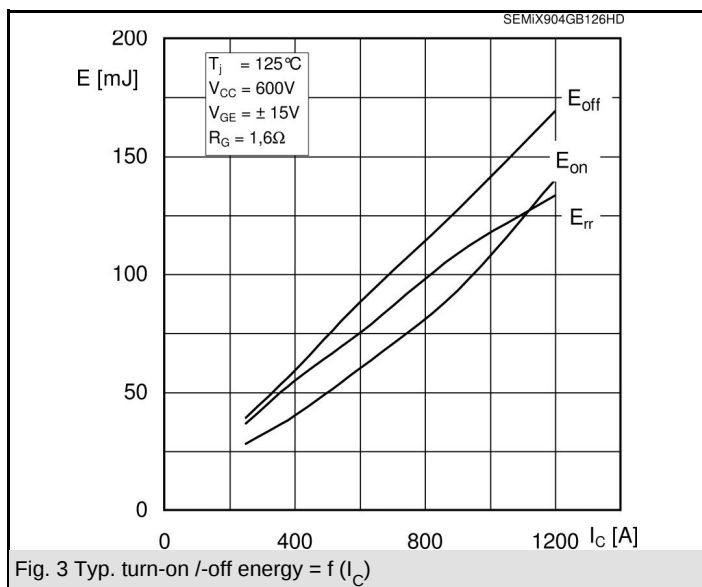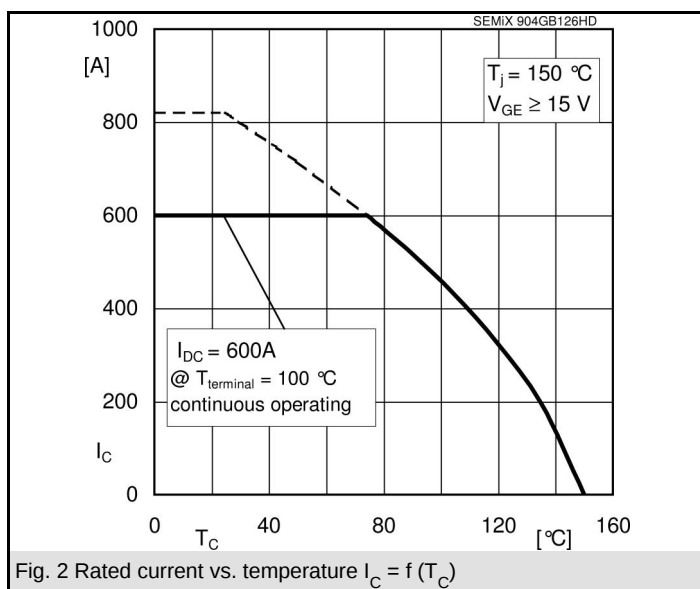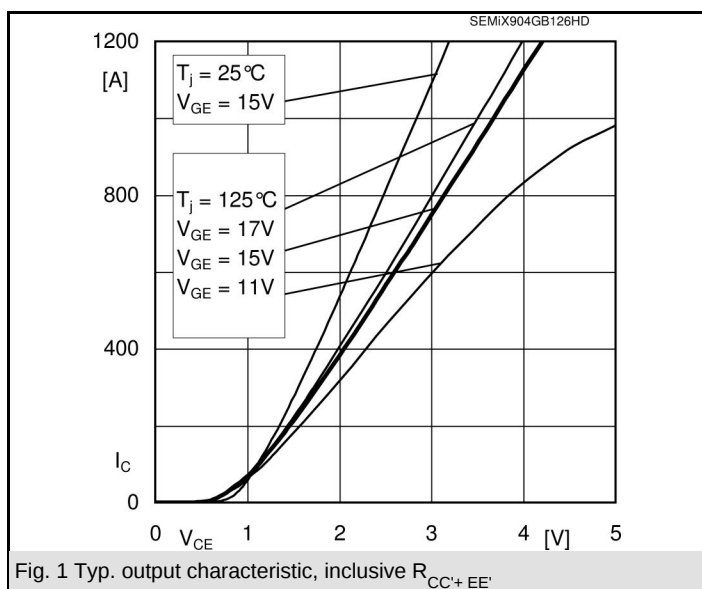

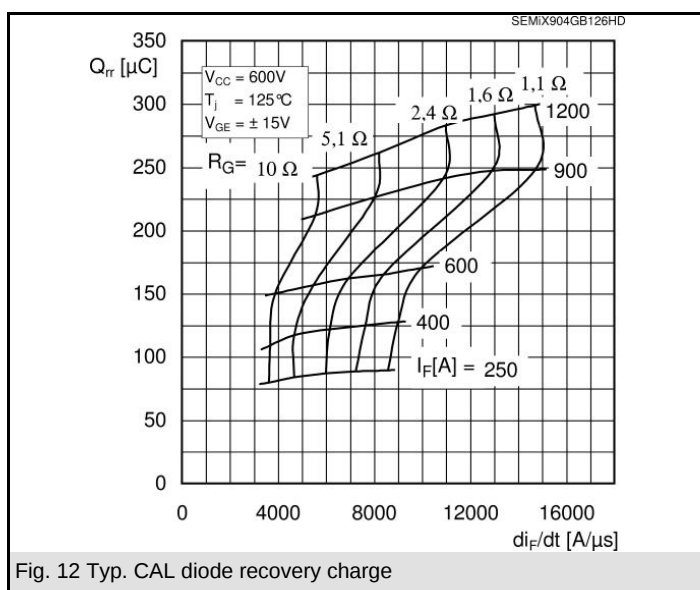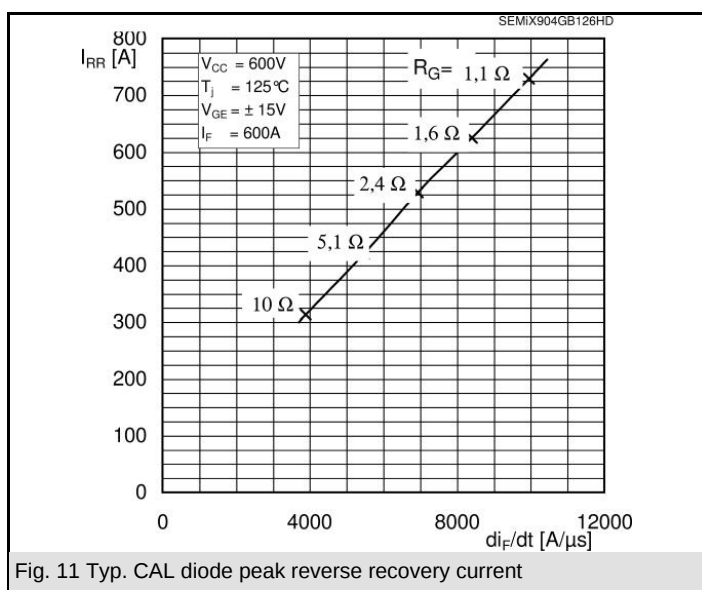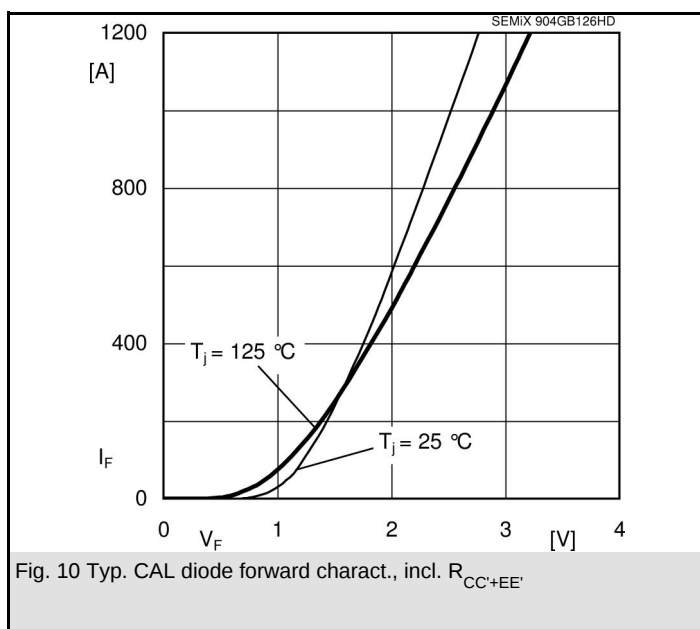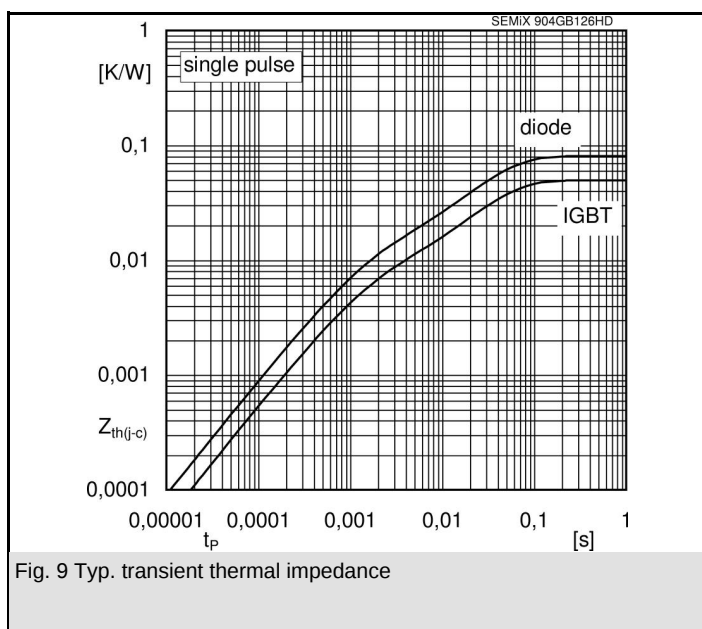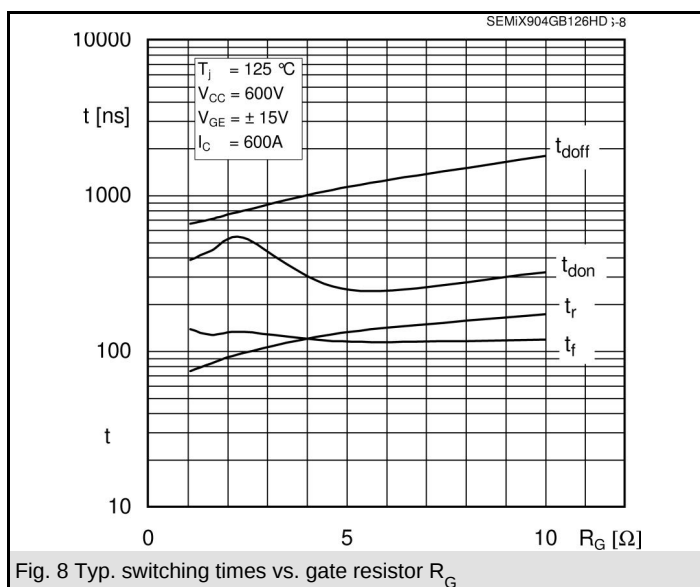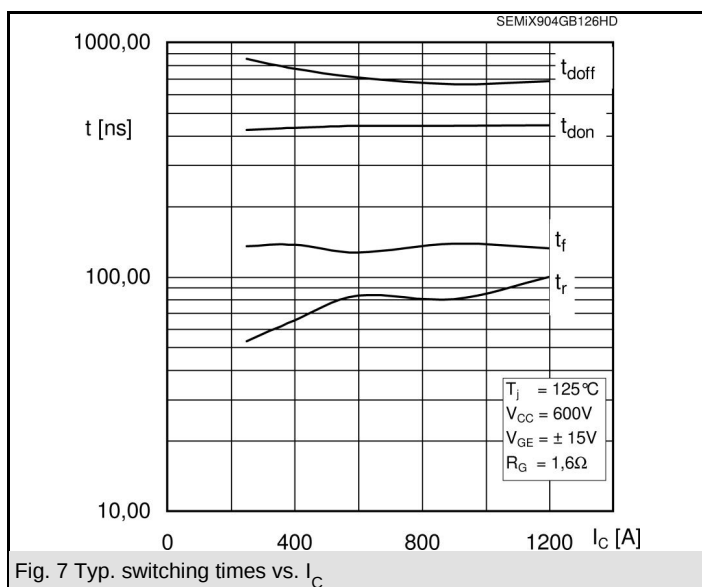

SEMiX 904GB126HDs

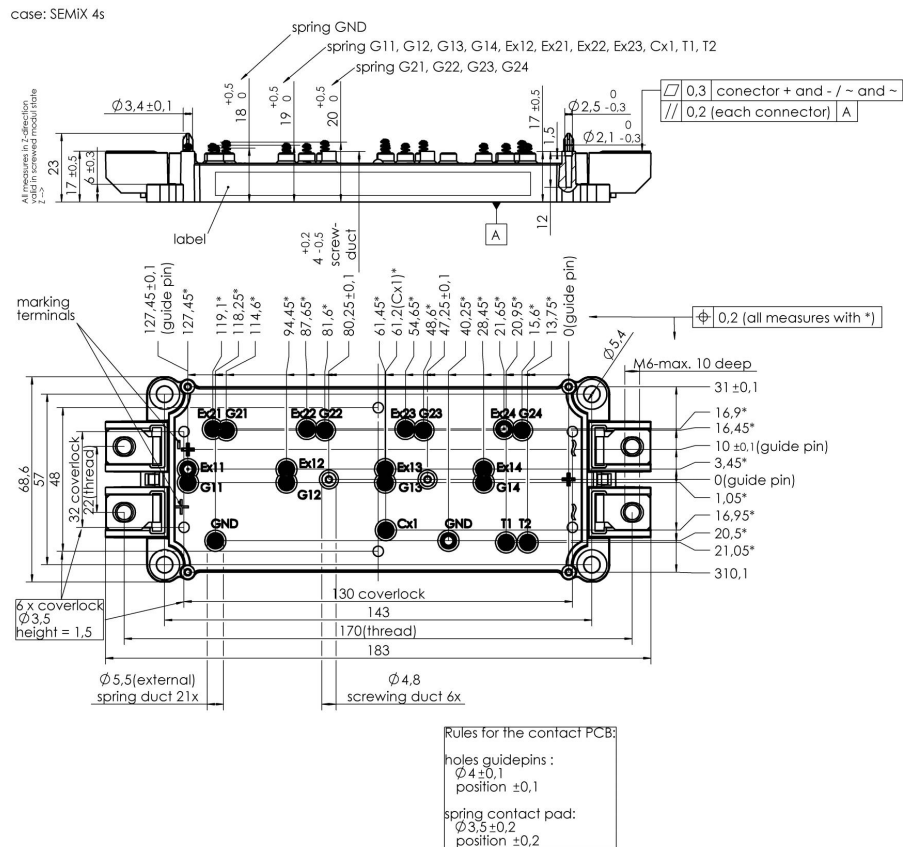

Case SEMiX 4s

