


KY Series

- Newly innovative electrolyte is employed to minimize ESR
- Endurance with ripple current : 4000 to 10000 hours at 105°C
- Non solvent-proof type
- Pb-free design




◆ SPECIFICATIONS

| Items | Characteristics | | | | | | |
|--|--|--------------------------------------|----------------------|---------------------|--------------------------|------|------|
| Category | -40 to +105°C | | | | | | |
| Temperature Range | -40 to +105°C | | | | | | |
| Rated Voltage Range | 6.3 to 50V _{dc} | | | | | | |
| Capacitance Tolerance | ±20% (M) (at 20°C, 120Hz) | | | | | | |
| Leakage Current | I=0.01CV or 3µA, whichever is greater. Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C after 2 minutes) | | | | | | |
| Dissipation Factor (tanδ) | Rated voltage (V _{dc}) | 6.3V | 10V | 16V | 25V | 35V | 50V |
| | tanδ (Max.) | 0.22 | 0.19 | 0.16 | 0.14 | 0.12 | 0.10 |
| | When nominal capacitance exceeds 1000µF, add 0.02 to the value above for each 1000µF increase. (at 20°C, 120Hz) | | | | | | |
| Low Temperature Characteristics (Max. Impedance Ratio) | Rated voltage (V _{dc}) | 6.3V | 10V | 16V | 25V | 35V | 50V |
| | Z(-25°C)/Z(+20°C) | 4 | 3 | 2 | 2 | 2 | 2 |
| | Z(-40°C)/Z(+20°C) | 8 | 6 | 4 | 3 | 3 | 3 |
| | (at 120Hz) | | | | | | |
| Endurance | The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for the specified period of time at 105°C. | | | | | | |
| | Time | 6.3 to 10V _{dc} | φ5 & 6.3 : 4000hours | φ8 & 10 : 6000hours | φ12.5 to 18 : 8000hours | | |
| | | 16 to 50V _{dc} | φ5 & 6.3 : 5000hours | φ8 & 10 : 7000hours | φ12.5 to 18 : 10000hours | | |
| | Capacitance change | ≤±25% of the initial value | | | | | |
| | D.F. (tanδ) | ≤200% of the initial specified value | | | | | |
| Leakage current | ≤The initial specified value | | | | | | |
| Shelf Life | The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied. | | | | | | |
| | Capacitance change | ≤±25% of the initial value | | | | | |
| | D.F. (tanδ) | ≤200% of the initial specified value | | | | | |
| | Leakage current | ≤The initial specified value | | | | | |


◆ DIMENSIONS [mm]

- Terminal Code : E

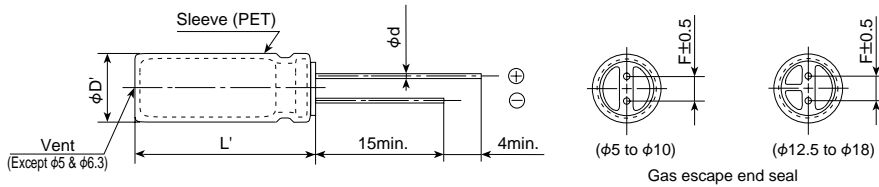

| φD | 5 | 6.3 | 8 | 10 | 12.5 | 16 | 18 |
|-----|------------|-----|-----|-----|------|-----|-----|
| φd | 0.5 | 0.5 | 0.6 | 0.6 | 0.6 | 0.8 | 0.8 |
| F | 2.0 | 2.5 | 3.5 | 5.0 | 5.0 | 7.5 | 7.5 |
| φD' | φD+0.5max. | | | | | | |
| L' | L+1.5max. | | | | | | |

◆ PART NUMBERING SYSTEM

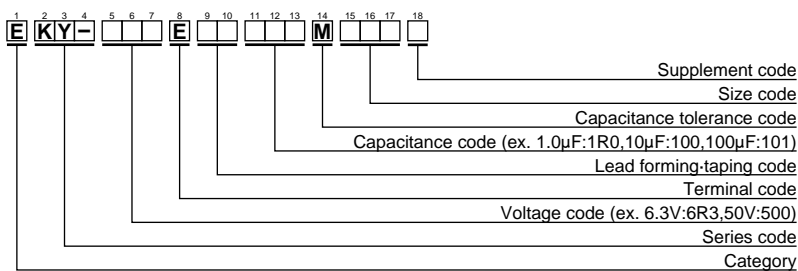

Please refer to "A guide to global code (radial lead type)"



◆STANDARD RATINGS

Table with columns: WV (Vdc), Cap (µF), Case size (φD×L(mm)), Impedance (Ωmax/100kHz) at 20°C and -10°C, Rated ripple current (mA rms/105°C, 100kHz), Part No. It lists specifications for series 6.3, 10, and 16 across various capacitance and case size options.

□□ : Lead forming / Taping code

◆STANDARD RATINGS

| WV (Vdc) | Cap (μF) | Case size φD×L(mm) | Impedance (Ωmax/100kHz) | | Rated ripple current (mA _{RMS} / 105°C, 100kHz) | Part No. | WV (Vdc) | Cap (μF) | Case size φD×L(mm) | Impedance (Ωmax/100kHz) | | Rated ripple current (mA _{RMS} / 105°C, 100kHz) | Part No. |
|-------------|-------------|-----------------------|----------------------------|-------|---|--------------------|-------------|-------------|-----------------------|----------------------------|--------------------|---|--------------------|
| | | | 20°C | -10°C | | | | | | 20°C | -10°C | | |
| 35 | 2200 | 18 × 25 | 0.019 | 0.049 | 3140 | EKY-350E□□222MM25S | 50 | 270 | 12.5 × 15 | 0.061 | 0.20 | 1260 | EKY-500E□□271MK15S |
| | 2700 | 16 × 35.5 | 0.015 | 0.044 | 3610 | EKY-350E□□272MLP1S | | 330 | 10 × 25 | 0.055 | 0.22 | 1440 | EKY-500E□□331MJ25S |
| | 2700 | 18 × 31.5 | 0.015 | 0.040 | 4170 | EKY-350E□□272MMN3S | | 470 | 10 × 30 | 0.043 | 0.17 | 1690 | EKY-500E□□471MJ30S |
| | 3300 | 16 × 40 | 0.013 | 0.038 | 4080 | EKY-350E□□332ML40S | | 470 | 12.5 × 20 | 0.045 | 0.15 | 1660 | EKY-500E□□471MK20S |
| | 3300 | 18 × 35.5 | 0.014 | 0.038 | 4220 | EKY-350E□□332MMP1S | | 470 | 16 × 15 | 0.055 | 0.17 | 1690 | EKY-500E□□471ML15S |
| | 3900 | 18 × 40 | 0.012 | 0.032 | 4280 | EKY-350E□□392MM40S | | 560 | 12.5 × 25 | 0.034 | 0.11 | 1950 | EKY-500E□□561MK25S |
| 50 | 0.47 | 5 × 11 | 5.5 | 22.0 | 17 | EKY-500E□□R47ME11D | | 560 | 18 × 15 | 0.054 | 0.15 | 1930 | EKY-500E□□561MM15S |
| | 1.0 | 5 × 11 | 4.0 | 16.0 | 30 | EKY-500E□□1R0ME11D | | 680 | 12.5 × 30 | 0.030 | 0.10 | 2310 | EKY-500E□□681MK30S |
| | 2.2 | 5 × 11 | 2.5 | 10.0 | 43 | EKY-500E□□2R2ME11D | | 820 | 12.5 × 35 | 0.025 | 0.083 | 2510 | EKY-500E□□821MK35S |
| | 3.3 | 5 × 11 | 2.2 | 8.8 | 53 | EKY-500E□□3R3ME11D | | 820 | 16 × 20 | 0.034 | 0.10 | 2210 | EKY-500E□□821ML20S |
| | 4.7 | 5 × 11 | 1.9 | 7.6 | 88 | EKY-500E□□4R7ME11D | | 1000 | 12.5 × 40 | 0.021 | 0.069 | 2920 | EKY-500E□□102MK40S |
| | 10 | 5 × 11 | 1.5 | 6.0 | 100 | EKY-500E□□100ME11D | | 1000 | 16 × 25 | 0.025 | 0.075 | 2555 | EKY-500E□□102ML25S |
| | 22 | 5 × 11 | 0.70 | 2.8 | 180 | EKY-500E□□220ME11D | | 1000 | 18 × 20 | 0.036 | 0.097 | 2490 | EKY-500E□□102MM20S |
| | 56 | 6.3 × 11 | 0.30 | 1.2 | 295 | EKY-500E□□560MF11D | | 1200 | 16 × 31.5 | 0.022 | 0.066 | 3010 | EKY-500E□□122MLN3S |
| | 100 | 8 × 11.5 | 0.17 | 0.68 | 555 | EKY-500E□□101MHB5D | | 1200 | 18 × 25 | 0.026 | 0.070 | 2740 | EKY-500E□□122MM25S |
| | 120 | 8 × 15 | 0.12 | 0.48 | 730 | EKY-500E□□121MH15D | | 1500 | 16 × 35.5 | 0.019 | 0.057 | 3150 | EKY-500E□□152MLP1S |
| | 150 | 10 × 12.5 | 0.12 | 0.48 | 760 | EKY-500E□□151MJC5S | | 1800 | 16 × 40 | 0.016 | 0.048 | 3710 | EKY-500E□□182ML40S |
| | 180 | 8 × 20 | 0.091 | 0.36 | 910 | EKY-500E□□181MH20D | | 1800 | 18 × 31.5 | 0.021 | 0.057 | 3635 | EKY-500E□□182MMN3S |
| 220 | 10 × 16 | 0.084 | 0.34 | 1050 | EKY-500E□□221MJ16S | 2200 | 18 × 35.5 | 0.017 | 0.046 | 3680 | EKY-500E□□222MMP1S | | |
| 270 | 10 × 20 | 0.060 | 0.24 | 1220 | EKY-500E□□271MJ20S | 2700 | 18 × 40 | 0.014 | 0.038 | 3800 | EKY-500E□□272MM40S | | |

□□ : Lead forming / Taping code

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

| Capacitance (μF) | Frequency (Hz) | | | |
|------------------|----------------|------|------|------|
| | 120 | 1k | 10k | 100k |
| 0.47 to 180 | 0.40 | 0.75 | 0.90 | 1.00 |
| 220 to 560 | 0.50 | 0.85 | 0.94 | 1.00 |
| 680 to 1,800 | 0.60 | 0.87 | 0.95 | 1.00 |
| 2,200 to 3,900 | 0.75 | 0.90 | 0.95 | 1.00 |
| 4,700 to | 0.85 | 0.95 | 0.98 | 1.00 |