

# Topstek Current Transducer TKD3A .. TKD20A


## TKD 3A~20A

### Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (20 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

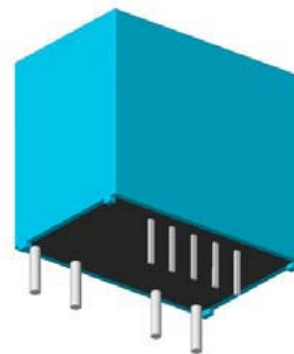

### Specifications

Parameter	Symbol	Unit	TKD3A .. TKD20A
Nominal Input Current	$I_{fn}$	A DC	3 .. 20
Linear Range	$I_{fs}$	A DC	$\pm 9 \dots \pm 60 = 3x I_{fn}$
Nominal Output Voltage	$V_{hn}$	V	4 V $\pm 1\%$ at $I_f = I_{fn}$ ( $R_L = 10k\Omega$ )
Offset Voltage	$V_{os}$	mV	Within $\pm 40$ mV @ $I_f = 0$ , $T_a = 25^\circ C$
Output Resistance	$R_{OUT}$	$\Omega$	<100 $\Omega$
Hysteresis Error	$V_{oh}$	mV	Within $\pm 15$ mV @ $I_f = I_{fn} \rightarrow 0$
Supply Voltage	$V_{CC}/V_{EE}$	V	$\pm 15V \pm 5\%$
Linearity	$\rho$	%	Within $\pm 1\%$ of $I_{fn}$
Consumption Current	$I_{CC}$	mA	$\pm 20$ mA nominal, $\pm 30$ mA max
Response Time (90% $V_{hn}$ )	$T_r$	$\mu$ sec	5 $\mu$ sec max. @ $d I_f / dt = I_{fn} / \mu$ sec
Frequency bandwidth (-3dB)	$f_{BW}$	Hz	DC to 50kHz
Thermal Drift of Output	-	%/ $^\circ C$	Within $\pm 0.1$ %/ $^\circ C$ @ $I_{fn}$
Thermal Drift of Zero Current Offset	-	mV/ $^\circ C$	Within $\pm 1.5$ mV/ $^\circ C$ @ $I_{fn}$
Dielectric Strength	-	V	AC2.5KV X 60 sec
Isolation Resistance @ 1000 VDC	$R_{IS}$	M $\Omega$	>1000 M $\Omega$
Operating Temperature	$T_a$	$^\circ C$	-15 $^\circ C$ to 80 $^\circ C$
Storage Temperature	$T_s$	$^\circ C$	-20 $^\circ C$ to 85 $^\circ C$
Mass	W	g	15 g

