

RoHS Compliant Product

A suffix of "-C" specifies halogen-free

SMA




FEATURES

- * Ideal for surface mount applications
- * Easy pick and place
- * Built-in strain relief
- * Super Fast switching speed under 35ns

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Metallurgically bonded construction
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 0.063 grams



| | Dimensions in Millimeters | | Dimensions in Inches | |
|----------|---------------------------|-------|----------------------|-------|
| A | 1.25 | 1.65 | 0.049 | 0.065 |
| B | 3.99 | 4.60 | 0.157 | 0.181 |
| C | 2.50 | 2.90 | 0.098 | 0.114 |
| D | 1.98 | 2.44 | 0.078 | 0.096 |
| E | 0.051 | 0.203 | 0.002 | 0.008 |
| F | 4.78 | 5.28 | 0.188 | 0.208 |
| G | 0.76 | 1.52 | 0.030 | 0.060 |
| H | 0.152 | 0.305 | 0.006 | 0.012 |

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| TYPE NUMBER | SUF101A | SUF102A | SUF103A | SUF104A | SUF105A | UNITS |
|---|------------|---------|---------|---------|---------|-------|
| Maximum Recurrent Peak Reverse Voltage | 50 | 100 | 200 | 400 | 600 | V |
| Maximum RMS Voltage | 35 | 70 | 140 | 280 | 420 | V |
| Maximum DC Blocking Voltage | 50 | 100 | 200 | 400 | 600 | V |
| Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length at Ta=55°C | 1.0 | | | | | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | 30 | | | | | A |
| Maximum Instantaneous Forward Voltage at 1.0A | 0.95 | | 1.25 | | 1.7 | V |
| Maximum DC Reverse Current Ta=25°C | 5.0 | | | | | µA |
| at Rated DC Blocking Voltage T a=100°C | 80 | | | | | µA |
| Maximum Reverse Recovery Time (Note 1) | 35 | | | | | nS |
| Typical Junction Capacitance (Note 2) | 15 | | | | | pF |
| Operating and Storage Temperature Range T _J , T _{STG} | -65 — +175 | | | | | °C |

NOTES:

1. Reverse Recovery Time test condition: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A
2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

RATING AND CHARACTERISTIC CURVES (SUF101A THRU SUF105A)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

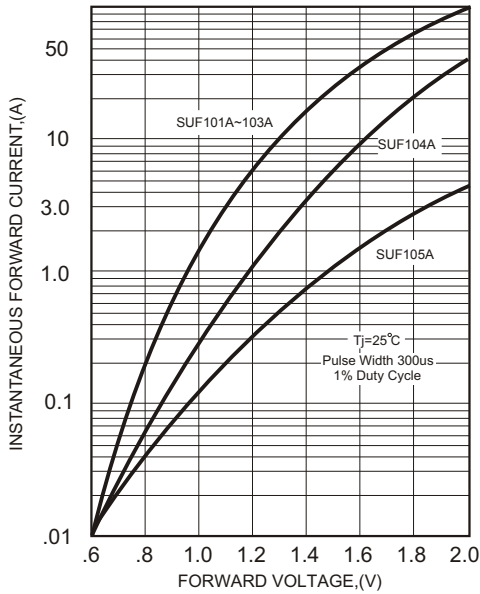


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE


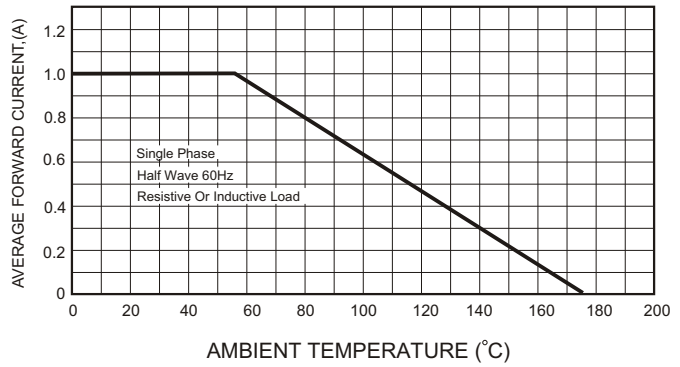


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

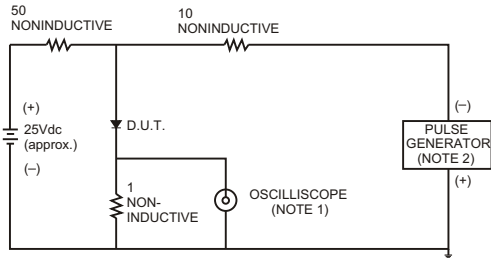

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

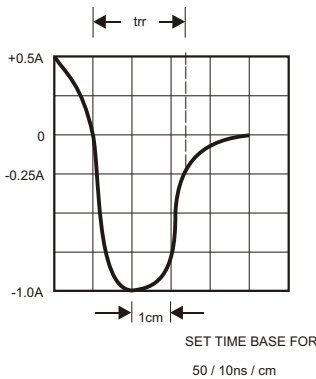


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

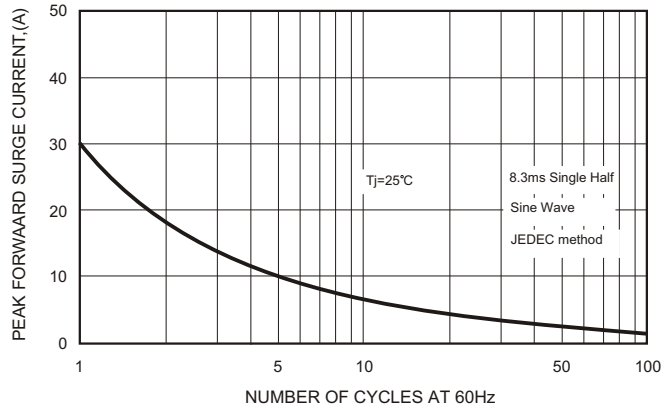


FIG.5-TYPICAL JUNCTION CAPACITANCE

