


Surface Mount LED J Series for low current or superbright use, 0125 Series Low Profile Right Angle Lens



The 0125 series lamps are miniature chip type designed for two-way surface mounting. Mounted normally, these lamps can be used as circuit board status indicators or as backlight for switches or key pads. Mounted at right angles these lamps are miniature through the panel indicators. These lamps are in EIA481 tape and reel packaging with approximately 2000 pcs per reel.



RoHS Compliant
Aug 2004

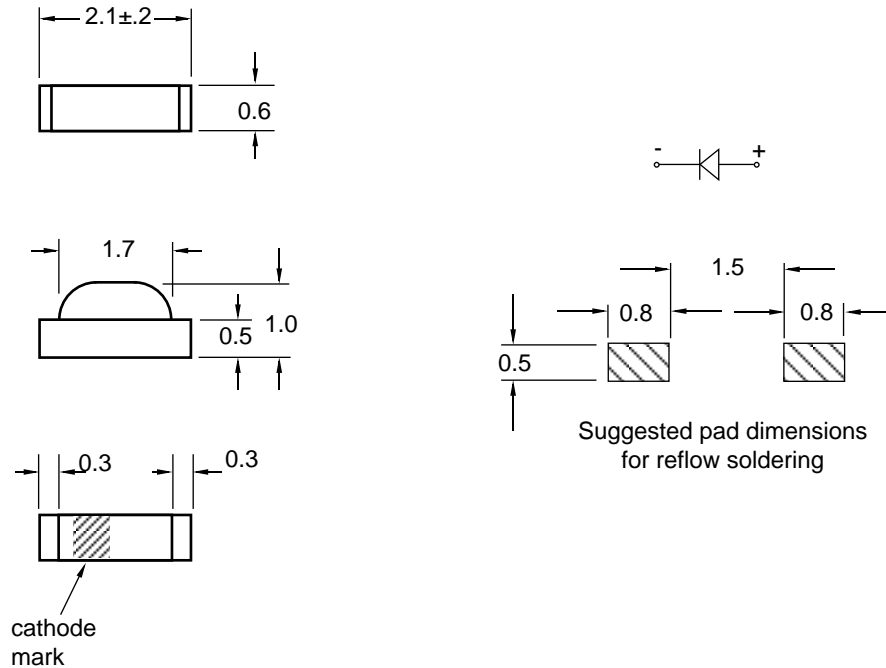

GENERAL INFORMATION

| | |
|------------------------------|----------------------|
| Operating Temperature Range | -40 °C to +85 °C |
| Storage Temperature Range | -40 °C to +90 °C |
| Reflow Soldering Temperature | 260 °C for 5 sec max |

APPLICATION INFORMATION (ALL RATINGS AT 25 °C AMBIENT)

| Part No. | Emitted Color | Peak | $\Delta\lambda$ | Absolute Maximum Ratings | | | | | E/O Characteristics | | | | | |
|----------|---------------|-----------|-----------------|--------------------------|---------|-----|----|----|-----------------------|-----------------------|-----|---------------------|-----|-----------------|
| | | λ | | Pd | If (mA) | | Ir | Vr | Iv (mcd) @ If=20mA | | | Vf (V) @ If=20mA | | $2\Theta_{1/2}$ |
| | | (nm) | | | (mW) | dc | | | 1/10 duty @ 1 kHz | @ Vr=5V (μ A) | (V) | 2mA | Min | |
| JRC0125 | Red | 632 | 20 | 60 | 25 | 160 | 10 | 5 | 3 | 20 | 48 | 2.0 | 2.4 | 130 |
| JGC0125 | Green | 575 | 20 | 60 | 25 | 160 | 10 | 5 | 1 | 13 | 20 | 2.0 | 2.4 | 130 |
| JYC0125 | Yellow | 591 | 15 | 60 | 25 | 160 | 10 | 5 | 3 | 20 | 49 | 2.0 | 2.4 | 130 |
| JOC0125 | Orange | 621 | 18 | 60 | 25 | 160 | 10 | 5 | 3 | 20 | 49 | 2.0 | 2.4 | 130 |
| JYOC0125 | YelOrng | 611 | 17 | 60 | 25 | 160 | 10 | 5 | 3 | 20 | 49 | 2.0 | 2.4 | 130 |

Specifications subject to change without notice. Dimensions are in mm \pm 0.3 unless stated otherwise.

IDEA, Inc., 1351 Titan Way, Brea, CA 92821 Ph:714-525-3302, 800-LED-IDEA; Fax: 714-525-3304 0508

013S-J0125