


1792 ECCW

Narrow Linewidth CW External Cavity Laser Diode



Analog Lasers & Photodiodes

BROADBAND

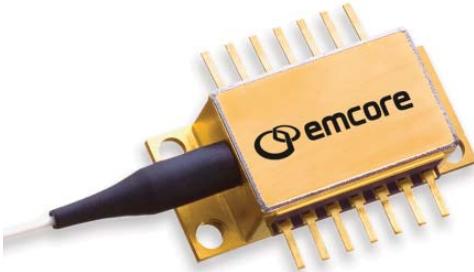

Features

- Narrow linewidth, < 10 kHz available
- ITU wavelengths across the C-band
- 100 GHz channel spacing
- 10 mW minimum output power
- Industry standard, high reliability, hermetic 14-pin butterfly package
- Excellent long-term wavelength stability eliminates the need for a wavelength locker
- Back-facet monitor
- Designed to meet Telcordia GR-468 qualification standard
- RoHS Compliant

Applications

- Seismic sensor applications
- Interferometry
- Spectroscopy
- Lidar
- Optical test and instrumentation
- Microwave photonics

The 1792 ECCW series external cavity laser is a cost effective solution for a coherent laser source. The laser is fabricated in a 14-pin hermetically sealed butterfly package that incorporates a bias tee circuit, an integrated thermoelectric cooler (TEC), a thermistor, and a back facet monitor photodiode. The 1792 ECCW provides substantially lower phase noise and a longer coherence length than other semiconductor lasers, including DFB lasers. The wavelength stability is assured by design, eliminating the need for wavelength lockers and complex feedback control circuits.



Performance Highlights

| Pigtail Type | Optical Power | | Linewidth kHz |
|--------------|---------------|--------------|------------------|
| | Minimum (mW) | Typical (mW) | |
| SMF | 15 | 20 | 50 |
| PMF | 10 | 12 | 50 |
| | 15 | 20 | 50 |

See following pages for complete specifications and conditions.

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

| Parameter | Symbol | Condition | Min | Max | Units |
|--|--------------------|---------------|-----|------|-------|
| Storage Temperature | T _{STG} | Non-operating | -40 | 85 | °C |
| Operating Case Temperature | T _{OP} | continuous | -20 | 75 | °C |
| Forward Current | I _{OP} | CW | - | 300 | mA |
| Reverse Voltage | V _R | continuous | - | 2 | V |
| Photodiode Forward Current | I _{MPD,F} | continuous | - | 2 | mA |
| Photodiode Reverse Voltage | V _{MPD,R} | continuous | - | 10 | V |
| TEC Current ² | I _{TEC} | - | - | 1.8 | A |
| TEC Voltage | V _{TEC} | continuous | - | 3.5 | V |
| Fiber Bend Radius | R | continuous | 35 | - | mm |
| Tensile Strength, Fiber to Case | F | continuous | - | 5 | N |
| Lead Soldering Time ³ | t _{SOLID} | <260 °C | - | 10 | sec |
| Package Mounting Screw Torque ⁴ | - | - | - | 0.12 | m*N |
| Operating Humidity: Non-Condensing | X _{OP} | continuous | 5 | 95 | % |
| Storage Humidity: Non-Condensing | X _{OP} | continuous | 5 | 95 | % |

Analog Lasers & Photodiodes

BROADBAND

Electrical / Optical Characteristics

| Parameter | Symbol | Condition | Min | Type | Max | Units |
|---|-----------------------|---|----------|----------|--------|---------|
| Minimum Optical Output Power | P ₀ | 15mW Option 10mW Option | 15 10 | 20 12 | - - | mW |
| Optical Linewidth ^{1,2,3,4} | - | Available for all other models | - | 25 | 50 | KHz |
| Threshold Current | I _{TH} | - | - | - | 30 | mA |
| Laser Bias Current | I _{OP} | - | - | - | 250 | mA |
| Forward Voltage | V _F | CW, P ₀ = 10 mW | - | - | 2.0 | V |
| MPD Current | I _{MON} | CW, P ₀ = 10 mW | 0.05 | - | 0.5 | mA |
| MPD Tracking Error | TE | -10°C < T _c < 65°C | - | - | ± 0.5 | dB |
| TEC Set Temperature ⁵ | T _s | Specified for every laser | 16 | - | 35 | °C |
| Center Wavelength (100 GHz ITU Grid) | λ _c | See ITU Grid Channel Numbering Table | | | nm | |
| Wavelength Drift with Case (-10 to 65 °C) Temperature | Δ λ _{Tc} | Relative to 25°C Case Temperature | - | - | ±40 | pm |
| Wavelength Offset from DWDM ITU Grid | Δ λ _{OFFSET} | TEC Temperature at T _s | - | - | ±80 | pm |
| Frequency Temperature Coefficient | Δf/ΔT | - | - | 3.5 | 5 | GHz/ °C |
| Frequency Current Coefficient | Δf/ΔI | - | - | 200 | 250 | MHz/mA |
| Optical Isolation | - | -10°C < T _c < 65°C | 35 | - | - | dB |
| Relative Intensity Noise | RIN | CW, at 200 MHz | - | -155 | - | dB/Hz |
| Side Mode Suppression Ratio | SMSR | CW, PO > 1 mW | 40 | - | - | dB |
| Optical Return Loss | ORL | - | 40 | - | - | dB |
| TEC Current | I _{TEC} | T _c = 65°C, T _{op} = T _s | - | - | +1.5 | A |
| TEC Voltage | V _{TEC} | T _c = 65°C, T _{op} = T _s | - | - | +3.0 | V |
| TEC Capacity | ΔT | T _c = 65°C | 50 | - | - | °C |
| Thermistor Resistance | R _{TH} | T _{op} = T _s | 9.5 | 10.0 | 10.5 | KΩ |
| Thermistor Beta Constant | B | - | - | 3891 | - | K |

ITU Grid Channel Numbering

| Channel | Wavelength (nm) | Channel | Wavelength (nm) |
|---------|-----------------|---------|-----------------|
| 60 | 1529.55 | 39 | 1546.12 |
| 59 | 1530.33 | 38 | 1546.92 |
| 58 | 1531.12 | 37 | 1547.72 |
| 57 | 1531.90 | 36 | 1548.51 |
| 56 | 1532.68 | 35 | 1549.32 |
| 55 | 1533.47 | 34 | 1550.12 |
| 54 | 1534.25 | 33 | 1550.92 |
| 53 | 1535.04 | 32 | 1551.72 |
| 52 | 1535.82 | 31 | 1552.52 |
| 51 | 1536.61 | 30 | 1553.33 |
| 50 | 1537.40 | 29 | 1554.13 |
| 49 | 1538.19 | 28 | 1554.94 |
| 48 | 1538.98 | 27 | 1555.75 |
| 47 | 1539.77 | 26 | 1556.56 |
| 46 | 1540.56 | 25 | 1557.36 |
| 45 | 1541.35 | 24 | 1558.17 |
| 44 | 1542.14 | 23 | 1558.98 |
| 43 | 1542.94 | 22 | 1559.79 |
| 42 | 1543.73 | 21 | 1560.61 |
| 41 | 1544.53 | 20 | 1561.42 |
| 40 | 1545.32 | | |

1. CW, at rated power., 2. Lorentzian linewidth measured at -30 dB., 3. Gaussian linewidth measured at -20 dB., 4. Linewidth measured with self-delayed heterodyne method at T_s, I_{op}, 5. TEC temperature at the recommended value.

Ordering Information

Example: 1792-SMF-043-10-50-FA: ECCW: SMF fiber pigtail, ITU channel 43, 1542.94 nm, 10 mW minimum output power, 50kHz linewidth, FC/APC optical connector

