


Slide Switch 5(H)mm, 2mm-travel Type

SSSS9 Series



Mid-size general purpose type well established for it's user friendliness.

- Detector
- Push
- Slide
- Rotary
- Encoders
- Power
- Dual-in-line Package Type
- TACT Switch™

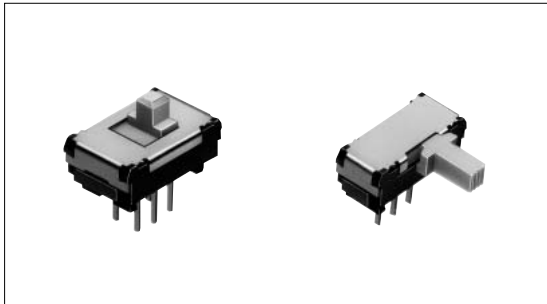

Typical Specifications

Items		Specifications	
Rating(max.)/(min.) (Resistive load)		0.1A 12V DC/50μA 3V DC	
Contact resistance (Initial performance/After lifetime)		30m max./80m max.	
Operating force		2-positions	3-positions
		3 ± 1.5N	a, c b 2 ± 1N b a, c 3 ± 1.5N
Operating life	Without load	10,000cycles	
	With load	10,000cycles(0.1A 12V DC)	

Product Line

Travel (mm)	Actuator direction	Actuator length(mm)	Poles	Positions	Mounting method	Changeover timing	Soldering	Minimum order unit(pcs.)	Products No.	Drawing No.
2	Vertical	2	1	2	Standard	Non shorting	Manual, Dip	5.000	SSSS912000	1
					Snap-in(t1.6)				SSSS910400	2
				3	Standard	Not specified			SSSS919500	3
			Snap-in(t1.6)		SSSS918500				4	
			2	2	Standard	Non shorting			SSSS922000	5
						Not specified			SSSS921800	6
		4	1	2	Standard	Non shorting		5.000	SSSS912500	1
					Snap-in(t1.6)				SSSS910800	2
				3	Standard	Not specified			SSSS919800	3
			Snap-in(t1.6)		SSSS918700				4	
			2	2	Standard	Non shorting			SSSS922500	5
						Not specified			SSSS923200	6
	Horizontal	2	1	2	Standard	Non shorting	5.000	SSSS916900	8	
					Snap-in(t1.6)			SSSS915000	9	
				3	Standard	Not specified		SSSS91B900	10	
			Snap-in(t1.6)		SSSS926400			12		
			2	2	Standard	Non shorting		SSSS928500	14	
						Not specified		SSSS916400	8	
		4	1	2	Standard	Non shorting	5.000	SSSS914500	9	
					Snap-in(t1.6)			SSSS91B600	10	
				3	Standard	Not specified		SSSS91A600	11	
			Snap-in(t1.6)		SSSS925800			12		
			2	2	Standard	Non shorting		SSSS923800	13	
						Not specified		SSSS928200	14	
3	3	Standard	Non shorting	SSSS925700	15					
			Snap-in(t1.6)							

Notes

1. Products other than those listed in the above chart are also available. Please contact us for details.
2. Please contact us for automotive use products.
3. Please place purchase orders per minimum order unit(integer).

Dimensions

Vertical Actuator Type

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from the direction A)
1	<p>1-pole, 2-positions Standard type</p>	
2	<p>1-pole, 2-positions Snap-in type</p>	
3	<p>1-pole, 3-positions Standard type</p>	
4	<p>1-pole, 3-positions Snap-in type</p>	

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

Small size
General Use type

Big size
General Use type

Other Use type

Slide Switch
5(H)mm, 2mm-travel Type | SSSS9 Series

Dimensions

Vertical Actuator Type

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from the direction A)
5	<p>2-poles, 2-positions Standard type</p>	
6	<p>2-poles, 3-positions Standard type</p>	
7	<p>2-poles, 3-positions Snap-in type</p>	
8	<p>1-pole, 2-positions Standard type</p>	

- Detector
- Push
- Slide
- Rotary
- Encoders
- Power
- Dual-in-line Package Type
- TACT Switch™
- Custom-Products
- Small size General Use type
- Big size General Use type
- Other Use type

Dimensions

Horizontal Actuator Type

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from the direction A)
9	<p>1-pole, 2-positions Snap-in type</p>	
10	<p>1-pole, 3-positions Standard type</p>	
11	<p>1-pole, 3-positions Snap-in type</p>	
12	<p>2-poles, 2-positions Standard type</p>	

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

Small size
General Use type

Big size
General Use type

Other Use type


Dimensions

Horizontal Actuator Type

Unit:mm

No.	Style	PC board mounting hole dimensions (Viewed from the direction A)
13	2-poles, 2-positions Snap-in type 	
14	2-poles, 3-positions Standard type 	
15	2-poles, 3-positions Snap-in type 	



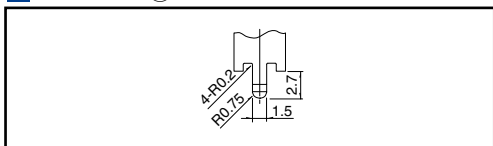











Detail of ① Unit:mm



Circuit Diagram (Viewed from Direction A)

1-pole, 2-positions Standard type 	1-pole, 2-positions Snap-in type 	1-pole, 3-positions Standard type 	1-pole, 3-positions Snap-in type
2-poles, 2-positions Standard type 	2-poles, 2-positions Snap-in type 	2-poles, 3-positions Standard type 	2-poles, 3-positions Snap-in type

List of Varieties

Series		SSAG	SSAH	SSAD	SSSS8	SSSS7	SSSS2	SSSS9	SSSF	SSSU	SSSB	SSST	SSAA	SSAC	SSAB		
Photo																	
Outline specifications	Travel (mm)	1.5			1.5 2		2		3		4		2	1.5	1.9 2		
	Actuator direction	Horizontal			Vertical Horizontal	Horizontal	Vertical Horizontal			Vertical		Horizontal		Vertical Horizontal			
	Number of poles	1			1 2		1 2 4		2 4	1	1 2	2	1				
Dimensions (mm)	W	9.05	9.5	6.7	11.2	8.8	13	14	16.5	24.5	29	13	12.4	9.5	9		
	D	3		3.2	2.6	3	3.5	4.7	7		9	4.3	6	5.5	4.2		
	H	1.15	0.9	0.7	1.4	2		5	8.5		12	3.5	5	5.2	8.5		
Operating temperature range		-10 to +60			-40 to +85		-10 to +60										
Rating (max.)(min.) (Resistive load)		10mA 5V DC	1mA 5V DC		0.3A 4V DC		0.3A 6V DC	0.1A 12V DC	0.1A 30V DC		0.3A 30V DC	0.1A 12V DC	0.1A 30V DC	1mA 5V DC	0.1A 12V DC		
		50μA 3V DC															
Electrical performance	Initial contact resistance	200m max.		100m max.	70m max.			30m max.	25m max.		20m max.	70m max.	25m max.	100m max.	30m max.		
	Insulation resistance	100M min. 100V DC				100M min. 500V DC										100M min. 100V DC	100M min. 500V DC
	Voltage proof	100V AC for 1minute				500V AC for 1minute										100V AC for 1minute	500V AC for 1minute
Mechanical performance	Robustness of terminal	3N for 1minute					5N for 1minute			3N for 1minute	5N for 1minute						
	Robustness of actuator	10N		5N	10N	20N	30N		50N	20N	10N	5N	30N	40N			
Durability	Operating life without load	10,000cycles	10,000cycles	10,000cycles 100m max. 2			10,000cycles 60m max.	10,000cycles 45m max.		10,000cycles 40m max.	10,000cycles 100m max.	10,000cycles 45m max.	10,000cycles 200m max.	1,000cycles 60m max.			
	Operating life without load Load as rating	500m max.	300m max.	10,000cycles 200m max.	10,000cycles 130m max. 2			10,000cycles 80m max.	10,000cycles 65m max.		5,000cycles 60m max.	10,000cycles 130m max.	10,000cycles 65m max.	10,000cycles 80m max.			
Environmental performance	Cold	-40 ± 2 for 96h		-20 ± 2 for 96h													
	Dry heat	85 ± 2 for 96h															
	Damp heat	40 ± 2 , 90 to 95%RH for 96h															
Soldering	Manual soldering	350 ± 5 3s max.		300 ± 5 5s max.		260 ± 5 3s max.	350 ± 10 4s max.	300 ± 10 5s max.	350 ± 10 5s max.	350 ± 10 3 ± 1s		350 ± 10 3s max.	300 ± 10 3 ± 1s	300 ± 10 2s	350 ± 10 3 ± 1s		
	Dip soldering						260 ± 5 3 ± 1s	260 ± 5 5 ± 1s		260 ± 5 10 ± 1s		260 ± 5 5 ± 1s	260 ± 10 10 ± 1s	260 ± 10 5 ± 1s	260 ± 5 10 ± 1s		
	Reflow soldering	Please see P.154															
Poles-positions	1-2	—	—								—			—			
	1-3			—											—		
	1-4	—				—					—						
	2-2	—				—									—		
	2-3	—				—									—		
	2-4	—				—					—						
	4-2	—				—							—				
Page	112	115	117	119	123	126	130	135	139	143	146	147	150	152			

Slide Switches Soldering Conditions 154
 Slide Switches Cautions 155

- Detector
- Push
- Slide**
- Rotary
- Encoders
- Power
- Dual-in-line Package Type
- TACT Switch™
- Custom-Products

- Small size General Use type
- Big size General Use type
- Other Use type

Note

The operating temperature range for automotive applications can be raised upon request. Please contact us for requirements of this kind.