


# 10/100 BASE-T TRANSFORMER

## P/N:16PT8512X DATA SHEET

### Feature





- Designed for 10/100 MB/s transmission over UTP-5 cable.
- Cable interface for isolation and low common mode emissions.
- 16-PIN DIP package for economic cost.
- Operating Temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C												
Part Number	Turns Ratio (±5%)		OCL (uH Min) @ 100KHz/0.1Vrms with 8mA/DC Bias	C <sub>WW</sub> (pF Max)	LL (uH Max)	Rise Time (10-90%) nS TYP	HI-POT (Vrms)	Continue				
	TX	RX						Insertion Loss (dB Max)		Return Loss (dB Min)		
	0.3-100 MHz	30MHz	40MHz	50MHz	60MHz	80MHz	0.3-60MHz	60-100MHz	30MHz	60MHz	100MHz	
16PT8512X	1CT:1CT	1CT:1CT	350	56	0.4	2.5	1500					
16PT8512X	-1.15	-16	-14	-13.5	-13	-12	-45	-35	-40	-30	-25	

### Schematic

### Mechanical

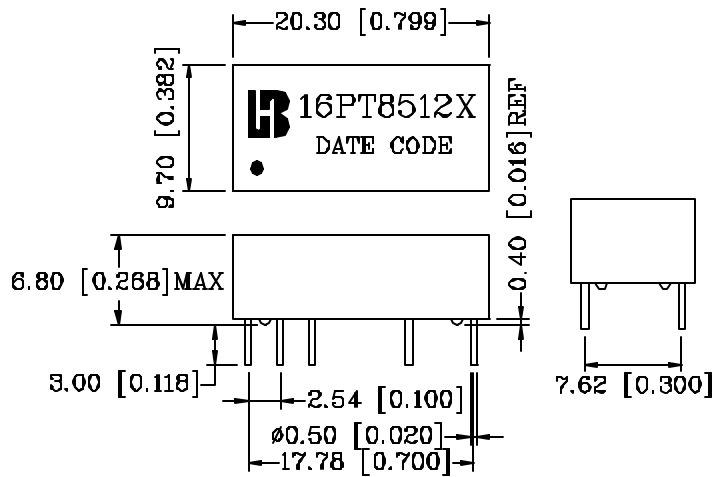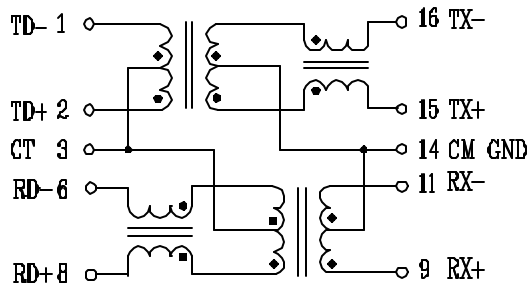

Units: mm [Inches]  
 Tolerances: xx.x0±0.25 [0.010]  
 0.xx±0.05 [0.002]