


FEATURES

- The plastic package carries Underwrites Laboratory Flammability Classification 94V-0
- Construction utilizes void-free molded plastic technique
- Low reverse leakage
- High forward surge current capability
- High reliability
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHs 2002/95/EC and WEEE 2002/96/EC



A-405

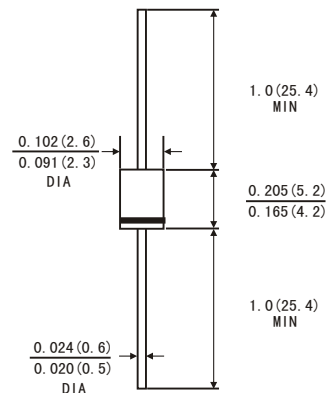

Dimensions in inches and (millimeters)

MECHANICAL DATA

- *Case:* A-405 molded plastic body
- *Terminals:* Lead solderable per MIL-STD-750,method 2026
- *Polarity:* Color band denotes cathode end
- *Mounting Position:* Any
- *Weight:* 0.008ounce, 0.23 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave 60Hz.,resistive or inductive load. For capacitive load, derate by 20%.)

	VRRM	RL101	RL102	RL103	RL104	RL105	RL106	RL107	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	Volts
Maximum average Forward Rectified Current 0.375"(9.5mm) lead length TA=55°C	I(AV)	1.0							Amp
Peak Forward Surge Current (8.3ms half sine-wave superimposed on rated load (JEDEC method)	IFSM	30.0							Amps
Maximum Instantaneous Forward Voltage at 1.0 A	VF	1.1							Volts
Maximum Reverse current at rated DC Blocking Voltage	TA =25°C	5.0							μA
	TA =100°C	500							
Typical Thermal resistance (Note 2)	RθJA	50.0							°C/W
Typical Junction Capacitance (Note 1)	CJ	15.0							pF
Operating and Storage temperature Range	TJ TSTG	-65 to+175							°C

Note: 1.Measured at 1MHz and applied reverse voltage of 4.0V DC.

2.Thermal resistance from junction to ambient and from junction to lead at 0.375"(9.5mm)lead length ,P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES RL101 THRU RL107

FIG.1-FORWARD CURRENT DERATING CURVE

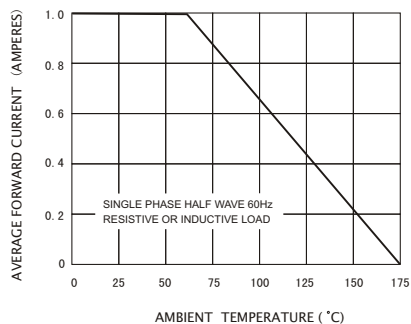


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

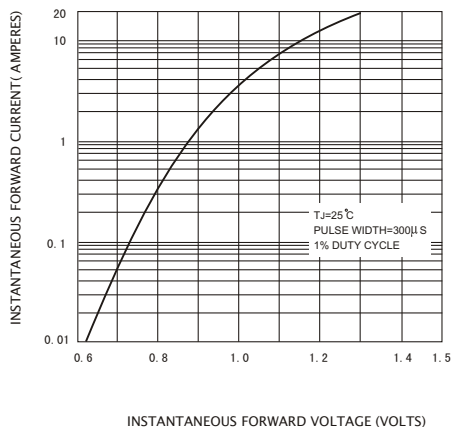


FIG.3-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

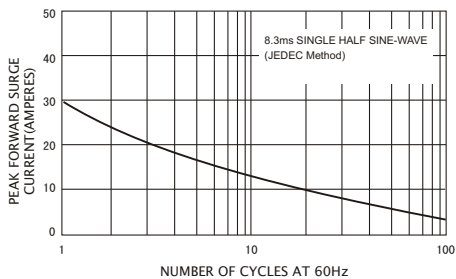


FIG.4-TYPICAL REVERSE CHARACTERISTICS

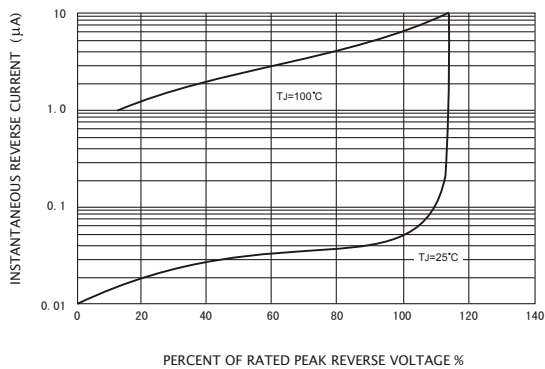


FIG.5-TYPICAL JUNCTION CAPACITANCE

