


TERMINAL BLOCKS



3.5mm + 3.81mm PITCH - SCREWLESS

- 3.5mm and 3.81mm pitch
- Interlocking
- 45 degree cable entry
- 1.5mm² wire acceptance

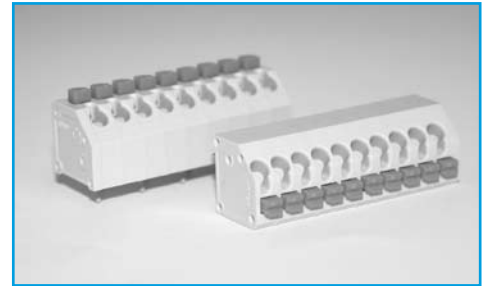


SPECIFICATION

Rating: 4A/450V (300V UL) 7
Dielectric Strength: ≥2.5KV/60sec
Insulation Resistance: ≥5MΩ
Working temperature: -20°C to +110°C
Moulding: Grey UL94V-0 flame retardant PA68
Pin/terminal: 5μ tinned, nickel plated brass

Recommended PCB hole size: ø1mm

OUTLINE DRAWING

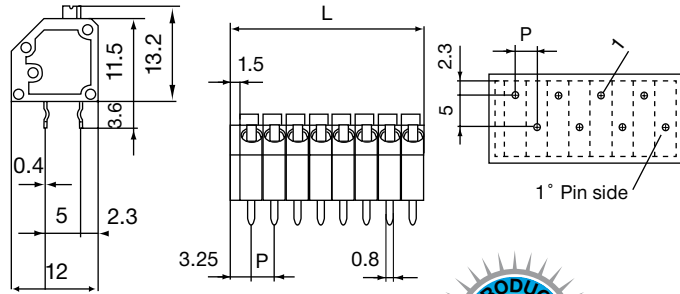

ORDERING INFORMATION

DBC	TB	70	/2
Dubilier Connectors	Series Terminal Block	Style 70 = 3.5mm 77 = 3.81mm	N° of Ways 2 = 2 ways 3 = 3 ways
* Other Number of ways are available up to 12 Please consult office for further details			

TERMINAL BLOCKS



- 5.08mm pitch
- 2-7 pole solid block
- Flame retardant material
- 0.3 to 1.5mm² wire acceptance

5.08mm PITCH - SCREWLESS




SPECIFICATION

Rating: 12A/250V
Dielectric Strength: ≥4KV/60sec
Insulation Resistance: ≥5MΩ
Working temperature: -20°C to 125°C
Short Period: 160°C
Moulding: UL94V-0 flame retardant PA66
Pin/terminal: 5μ tinned, phosphor bronze

Spring: Zinc plated steel
Recommended PCB hole size: ø1.1mm

OUTLINE DRAWING

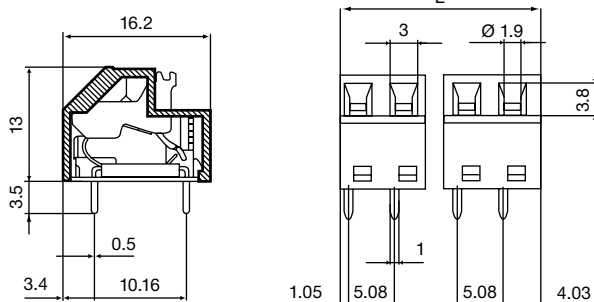

ORDERING INFORMATION

DBC	TB	41	/2
Dubilier Connectors	Series Terminal Block	Style	N° of Ways 2 = 2 ways 3 = 3 ways