


E-Series 75 Ohm Coupler 5 - 870 MHz




Features

- Low Intermod Distortion
- Coupling 17db Typical
- Surface Mount
- Tape and Reel Packaging available



SM-103 Package

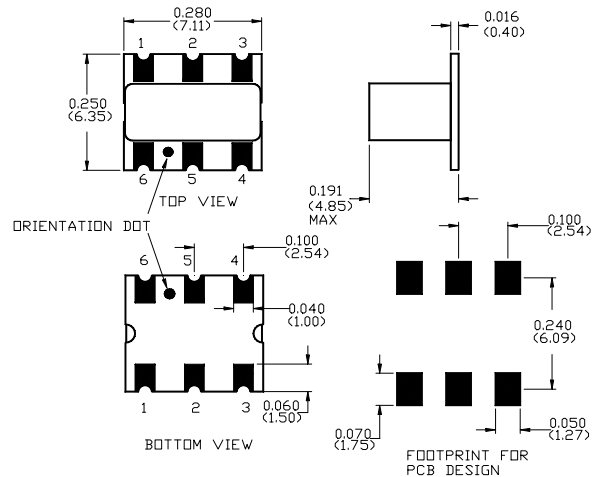

Description

M/A-COM's ELDC-17LI is a high performance 75 Ohm Coupler, in a SM-103 low cost, surface mount package. The ELDC-17LI is specifically designed for extremely low intermod distortion in CATV applications.

Electrical Specifications @25°C

Frequency Range	5 - 870 MHz	Units	Nominal	Typical	Minimum	Maximum
Mainline Loss	5 - 40 MHz	dB	—	0.5	—	0.8
	40 - 870 MHz	dB	—	0.6	—	1.0
Coupling	5 - 40 MHz	dB	17.5	—	—	± 0.7
	40 - 870 MHz	dB	17.5	—	—	± 0.5
Coupling Flatness		dB	—	—	—	1.0
Directivity	5 - 40 MHz	dB	—	25	20	—
	40 - 870 MHz	dB	—	15	10	—
Input Return Loss	5 - 40 MHz	dB	—	25	20	—
	40 - 870 MHz	dB	—	25	22	—
Output Return Loss	5 - 40 MHz	dB	—	23	20	—
	40 - 870 MHz	dB	—	30	23	—
Coupled Return Loss	5 - 40 MHz	dB	—	26	20	—
	40 - 870 MHz	dB	—	26	20	—

Please Note that the photograph above indicates package shape only, unit may be wired differently.

V1.00 S 1486 A

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make

Operating Characteristics


Function	Pin No.
Input	6
Output	1
Coupled	4
Ground	5
Not Connected	2
External 75 Ohms	3

Absolute Maximum Ratings


Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Pin Temperature (10 sec)	260°C
Operating/Storage Temperature	-40°C to +85°C

Typical Performance @ 25°C


Mainline Loss

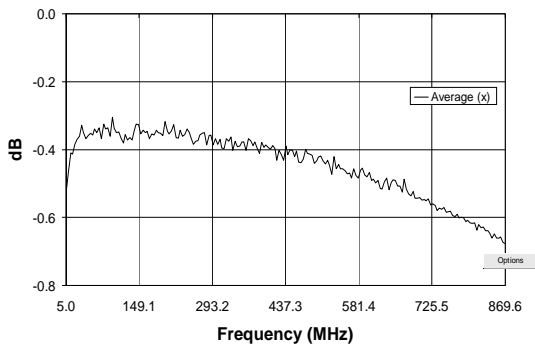


Input Return Loss

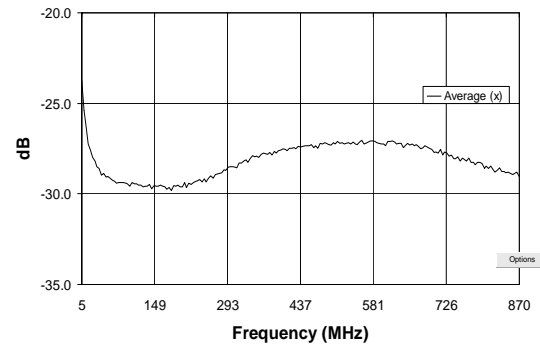


Coupling

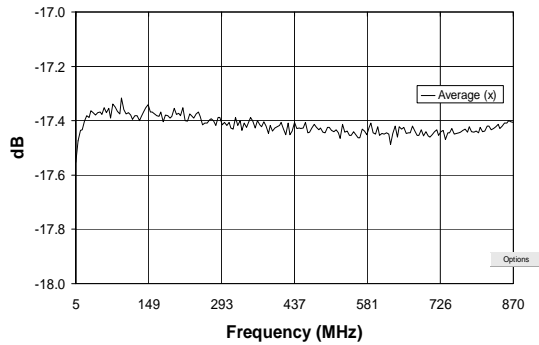


Output Return Loss

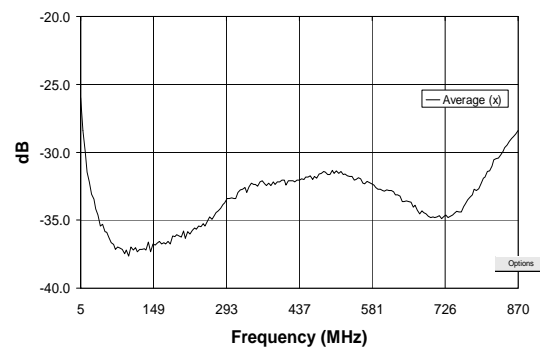

Directivity

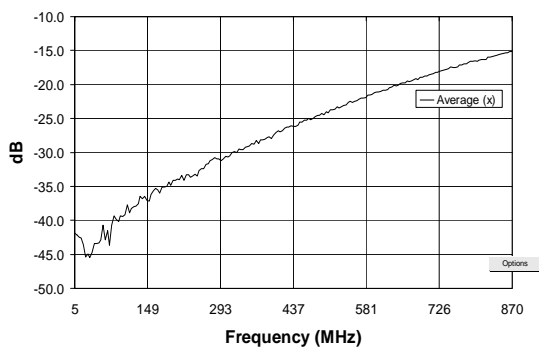

Coupled Port Return Loss

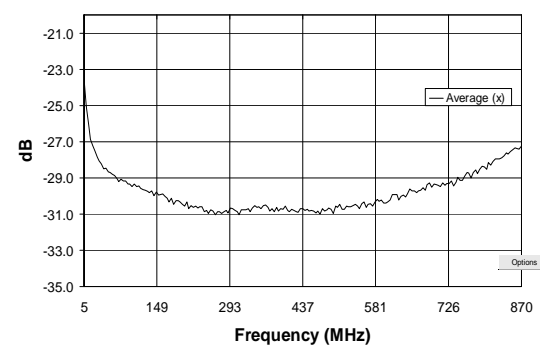

V1.00 S 1486 A

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make