

RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free




FEATURES

- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability
- * Epitaxial construction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Lead solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: As Marked
- * Mounting position: Any
- * Weight: 1.10 grams(Aproximately)

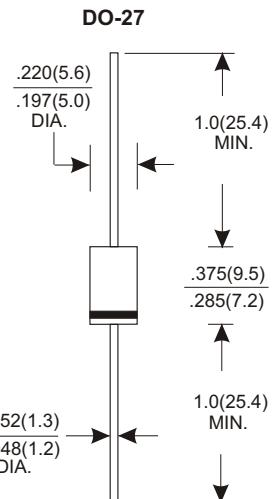

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
 Single phase half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.


TYPE NUMBER	SR8200E	UNITS
Maximum Recurrent Peak Reverse Voltage	200	V
Working Peak Reverse Voltage	200	V
Maximum DC Blocking Voltage	200	V
Maximum Average Forward Rectified Current		
See Fig. 1	8	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	150	A
Maximum Instantaneous Forward Voltage ($I_F = 8$ Amps, $T_j = 25^\circ\text{C}$)	0.82	V
Maximum Instantaneous Forward Voltage ($I_F = 8$ Amps, $T_j=125^\circ\text{C}$)	0.70	V
Maximum DC Reverse Current $T_a=25^\circ\text{C}$	0.05	mA
at Rated DC Blocking Voltage $T_a=125^\circ\text{C}$	20	mA
Typical Junction Capacitance (Note1)	200	pF
Typical Thermal Resistance $R_{\theta JC}$ (Note 2)	12	°C/W
Operating Temperature Range T_j	-50 ~ +150	°C
Storage Temperature Range T_{STG}	-65 ~ +175	°C

NOTES:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.

RATING AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

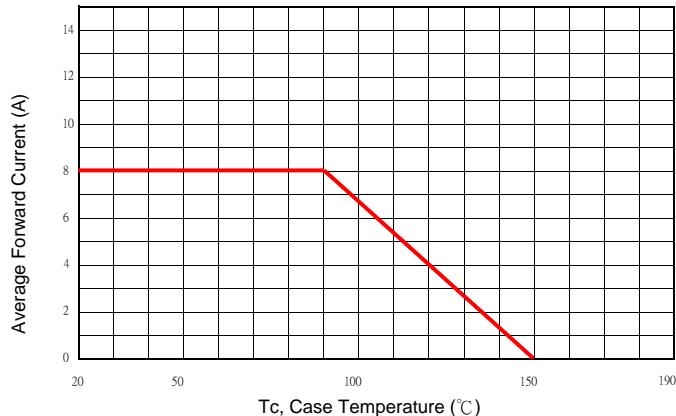


Typical Forward Characteristic

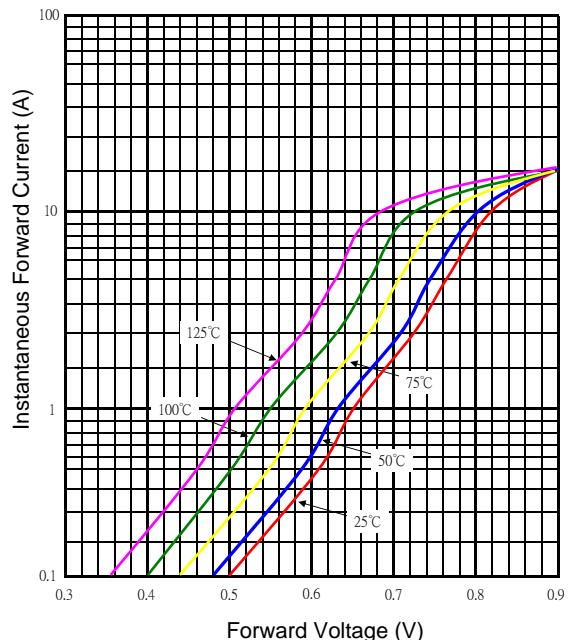


Typical Junction Capacitance

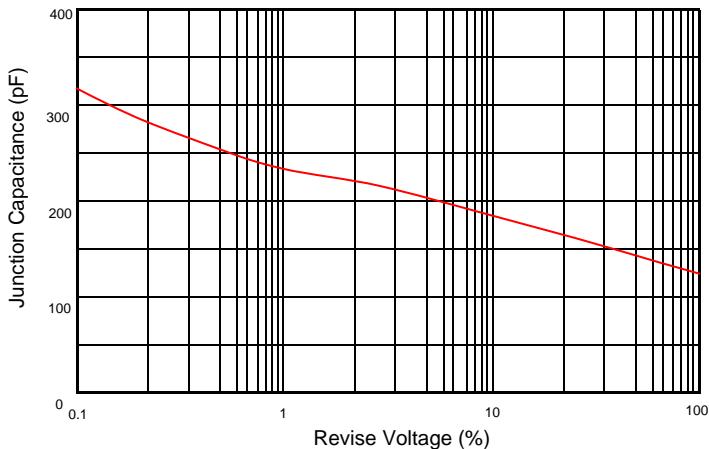

Typical Reverse Characteristic

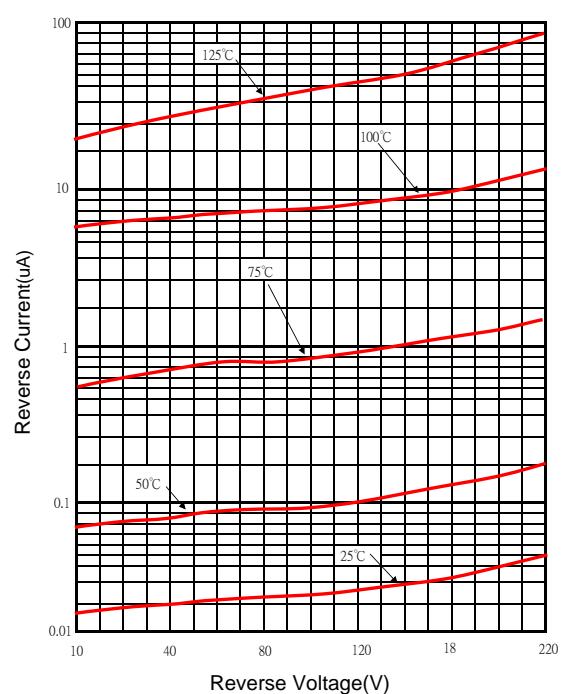

Maximum Non- Repetitive Forward Surge Current

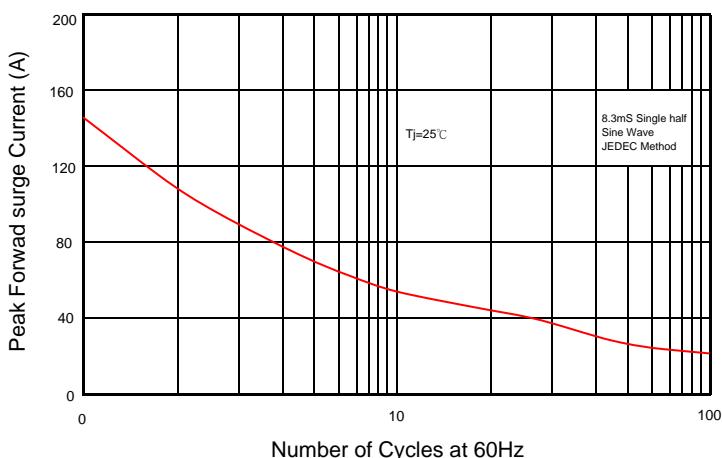

Any changing of specification will not be informed individual