


# Absolute encoders - parallel

## Shaft with clamping or synchro flange

### Multiturn encoder 12 bit ST / 12 bit MT / 250 cams

#### GXN1W

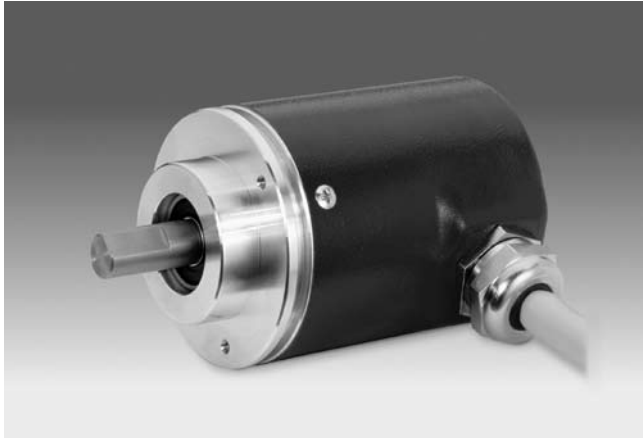

GXN1W with clamping flange

#### Features

- Encoder multiturn / parallel
- Optical sensing
- Resolution: singleturn 12 bit, multiturn 12 bit
- Clamping flange or synchro flange
- 250 cams freely programmable
- 16 parallel outputs
- Encoder programming by Windows software
- RS232 encoder programming interface

#### Technical data - electrical ratings

Voltage supply	10...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	≤50 mA (24 VDC)
Initializing time (typ.)	50 ms after power on
Interfaces	Parallel (cams), 5 special outputs programmable
Number of cams	250
Steps per turn	4096 / 12 bit
Number of turns	4096 / 12 bit
Absolute accuracy	±0.03°
Sensing method	Optical
Code	Binary
Code sequence	CW/CCW coded by connection
Inputs	TxD, RxD (RS232) Control signals UP/DOWN and zero ENABLE
Output circuit	PNP or NPN open collector
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-4
Programming interface	RS232
Programmable parameters	Steps per revolution Number of revolutions Code 2 presets (limits) Rotation speed monitoring
Diagnostic functions	Self-diagnosis Code continuity check Multiturn sensing
Approval	UL approval / E63076

#### Technical data - mechanical design

Housing	ø58 mm
Shaft	ø10 mm (clamping flange) ø6 mm (synchro flange)
Flange	Clamping or synchro flange
Protection DIN EN 60529	IP 54 without shaft seal IP 65 with shaft seal
Operating speed	≤10000 rpm (mechanical) ≤6000 rpm (electric)
Starting torque	≤0.015 Nm IP 54 ≤0.03 Nm IP 65
Rotor moment of inertia	20 gcm <sup>2</sup>
Admitted shaft load	≤20 N axial ≤40 N radial
Materials	Housing: steel Flange: aluminium
Operating temperature	-25...+70 °C
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 16-2000 Hz DIN EN 60068-2-27 Shock 200 g, 6 ms
Weight approx.	700 g
E-connection	Connector D-SUB, 37-pin, 1 m cable

# Absolute encoders - parallel

## Shaft with clamping or synchro flange

### Multiturn encoder 12 bit ST / 12 bit MT / 250 cams

GXN1W

#### Part number

GXN1W.     **01**

#### E-connection

- 31 Cable 1 m axial, connector D-SUB, 37-pins
- 41 Cable 1 m radial, connector D-SUB, 37-pins

#### Voltage supply / signals

- 10 10...30 VDC / open collector NPN
- 20 10...30 VDC / open collector PNP

#### Flange / Shaft

- 0 Clamping flange /  $\varnothing$ 10 mm IP 54
- A Clamping flange /  $\varnothing$ 10 mm IP 65
- 1 Synchro flange /  $\varnothing$ 6 mm IP 54
- B Synchro flange /  $\varnothing$ 6 mm IP 65

#### Accessories

##### Connectors and cables (page %S)

Z 140.001 Female connector D-SUB, 37-pin

##### Mounting accessories (page %S)

Z 119.006 Eccentric fixing, single

Z 119.013 Adaptor plate for clamping flange for modification into synchro flange

Z 119.015 Mounting adaptor for synchro flange

Z 119.017 Mounting angle for clamping flange

Z 119.025 Adaptor plate for clamping flange, mounting by eccentric fixings (order separately)

Z 119.033 Adaptor plate for clamping flange for modification into flange diameter 65 mm

Z 119.035 Bearing flange for encoders with synchro flange

##### Programming accessories (page %S)

Z 150.008 CD with software ProGeber & manual

Z 139.005 Programming cable for parallel shaft encoders, CD with ProGeber software and manual

# Absolute encoders - parallel

## Shaft with clamping or synchro flange

### Multiturn encoder 12 bit ST / 12 bit MT / 250 cams

#### GXN1W

Terminal significance	
UB	Encoder voltage supply.
GND	Encoder ground connection relating to UB.
Outputs D0-D15	16 programmable cams outputs. For PNP it is recommended to utilize pull-down resistors, for NPN pull-up resistors of 4.7 kΩ.
Outputs D17-D19	Outputs less any function. There must not be any external circuit.
Outputs D19 - D23	Special outputs. These outputs may be assigned to special functions.
Zero setting	Input for setting a zero point anywhere within the programmed encoder resolution. The zero setting operation is triggered by a High impulse and has to be in line with the selected direction of rotation (UP/ $\overline{\text{DOWN}}$ ). Connect to GND after setting operation for maximum interference immunity. Impulse duration $\geq 100$ ms.
$\overline{\text{UP/DOWN}}$	$\overline{\text{UP/DOWN}}$ counting direction input. This input is standard on High. $\overline{\text{UP/DOWN}}$ means ascending output data with clockwise shaft rotation when looking at flange. $\overline{\text{UP/DOWN}}$ -Low means ascending values with counterclockwise shaft rotation when looking at flange.
$\overline{\text{ENABLE}}$	Input for activating the output drivers that are triggered by input level Low. Upon being on High (or less potential) the output drivers switch to high-impedance (Tristate).
GND-Sense	Internally connected to GND and serves together with UB-Sense for measuring the encoder voltage supply.
UB-Sense	Internally connected to UB. In case the sensor line is not utilized the connection must be isolated (danger of short circuit).

Terminal assignment		
Connector	Core colour	Assignment
Pin 1	white	Output D0
Pin 2	brown	Output D1
Pin 3	green	Output D2
Pin 4	yellow	Output D3
Pin 5	grey	Output D4
Pin 6	pink	Output D5
Pin 7	black	Output D6
Pin 8	violet	Output D7
Pin 9	grey/pink	Output D8
Pin 10	red/blue	Output D9
Pin 11	white/green	Output D10
Pin 12	brown/green	Output D11
Pin 13	white/yellow	Output D12
Pin 14	yellow/brown	Output D13
Pin 15	white/grey	Output D14
Pin 16	grey/brown	Output D15
Pin 17	white/pink	–
Pin 18	pink/brown	–
Pin 19	white/black	–
Pin 20	brown/black	Output D19
Pin 21	grey/green	Output D20
Pin 22	yellow/grey	Output D21
Pin 23	pink/green	Output D22
Pin 24	yellow/pink	Output D23
Pin 25	–	–
Pin 26	–	–
Pin 27	yellow/blue	Zero setting
Pin 28	brown/blue	$\overline{\text{ENABLE}}$
Pin 29	–	–
Pin 30	green/blue	$\overline{\text{UP/DOWN}}$
Pin 31	–	–
Pin 32	–	–
Pin 33	–	–
Pin 34	white/blue	GND-Sense
Pin 35	white/red	UB-Sense
Pin 36	red	UB
Pin 37	blue	GND

# Absolute encoders - parallel

## Shaft with clamping or synchro flange

### Multiturn encoder 12 bit ST / 12 bit MT / 250 cams

GXN1W

#### Terminal assignment programming cable

Encoder function	Connector M12 5-pins	Core colour	PC connector D-SUB, 9-pins
–	Pin 1	brown	–
RxD	Pin 2	white	Pin 3
GND	Pin 3	blue	Pin 5
P/R Mode	Pin 4	black	Pin 5
TxD	Pin 5	grey	Pin 2
			Jumper 4-6 and Jumper 7-8

Connect encoder to supply voltage (UB/red/pin 36 and GND/blue/pin 37) using the supplementary 37-pin D-SUB connector.

#### Trigger level


Control inputs	Input circuit
Input level High	>0.7 UB
Input level Low	<0.3 UB
Input resistance	10 kΩ

#### Parallel outputs

Parallel outputs	Output circuit
	Open collector circuit-proof
Output level High (PNP)	>UB -4.5 V (I = -15 mA)
Output level Low (NPN)	<3.5 V (I = 15 mA)
Load High (PNP)	<-20 mA
Load Low (NPN)	<20 mA
Tristate	<200 μA

#### Dimensions

##### GXN1W clamping flange

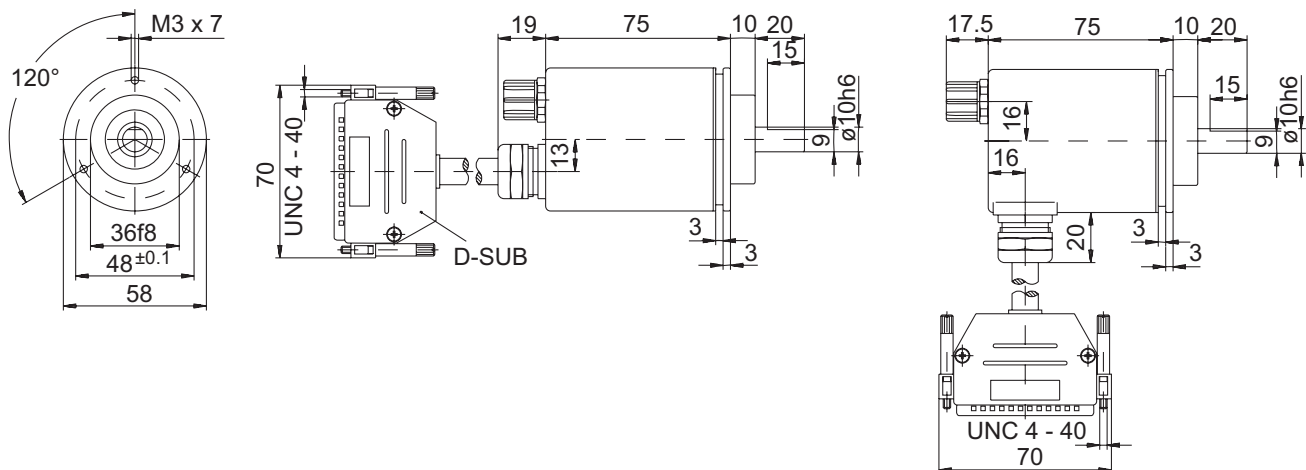

##### GXN1W synchro flange

