
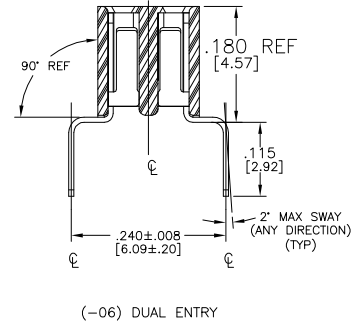

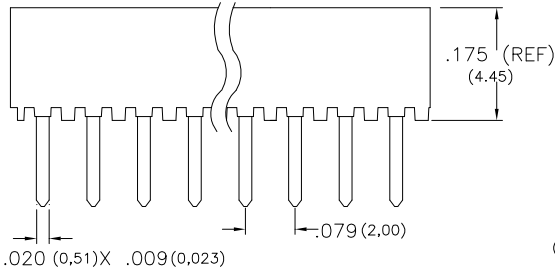
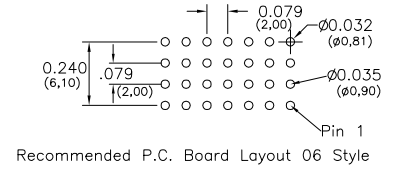
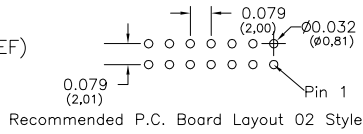


# Major League Electronics .079 cl Box Contact Socket Strip

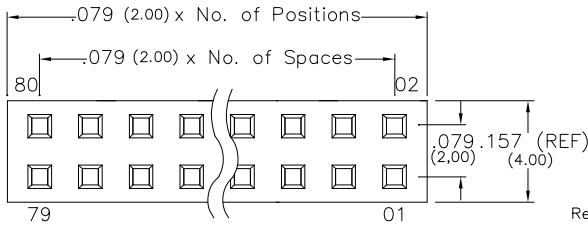

Tails may be clipped to achieve desired pin length

## Ordering Information

BCSS-2  -  -  -  -  -  - LF

Pins Per Row  01 - 40  
 Row Specification  D = Dual Row  
 Lead Free

Polarized Position  
 Leave blank if not needed  
 If required, specify empty pin position, e.g. 012 for Pin 12

Pin Options	
Top Entry	02
Dual Entry	06

Plating Options	
G	10µ Gold on Contact Area / Flash on Tail
T	Matte Tin All Over
GT	10µ Gold on Contact Area / Matte Tin on Tail
H	30µ Gold on Contact Area / Matte Tin on Tail
F	Gold Flash over Entire Pin

Mates with:  
 BSTC,  
 BSTCM,  
 BSTCR,  
 BSTCRSM,  
 BSTS,  
 TBSTC,  
 TBSTCM,  
 TBSTS,  
 TBSTCR,  
 TBSTCRSM,  
 TSHR,  
 TSHRE,  
 TSHS,  
 TSHSCM,  
 TTSHC,  
 TTSHCR,  
 TTSHCRE,  
 TTSHR,  
 TTSHRE,  
 TTSHS,  
 TTSHSM

## Specifications


Insertion Force - Single Contact only - H Plating:  
 3.7oz. (1.03N) avg with .0197 (0.50mm) sq. pin  
 Withdrawal Force - Single Contact only - H Plating:  
 2.2oz. (0.61N) avg with .0197 (0.50mm) sq. pin  
 Current Rating: 2.0 Ampere  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500V AC  
 Contact Resistance: 10 mΩ Max.  
 Operating Temperature: -40°C to + 105°C  
 Max. Process Temperature:  
 Peak: 260°C up to 10 secs.  
 Process: 230°C up to 60 secs.  
 Wave: 260°C up to 6 secs.  
 Manual Solder: 350°C up to 5 secs.

## Materials

Contact Material: Phosphor Bronze  
 Insulator Material: Nylon 6T  
 Plating: Au or Sn over 50µ" (1.27) Ni

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice



BCSS-2-DV SERIES

.079 cl Dual Row  
 Box Contact Socket Strip

15 FEB 07

Scale  
 NTS

UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS IN INCHES (MM)  
 TOLERANCES ARE:

ONE PLACE DECIMALS ±.100  
 TWO PLACE DECIMALS ±.010  
 THREE PLACE DECIMALS ±.005  
 FOUR PLACE DECIMALS ±.0020  
 ANGLES  
 ±5°



4235 Earnings Way, New Albany, Indiana, 47150, USA  
 1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244  
 Fax: 812-944-7268

E-mail: mle@mlelectronics.com  
 Web: www.mlelectronics.com

Edition  
 1

Sheet  
 1/1