



# SB1020FCT thru SB10150FCT

## SCHOTTKY BARRIER RECTIFIER

VOLTAGE - 20 TO 150 VOLTS CURRENT - 10 AMPERES



ITO-220AB

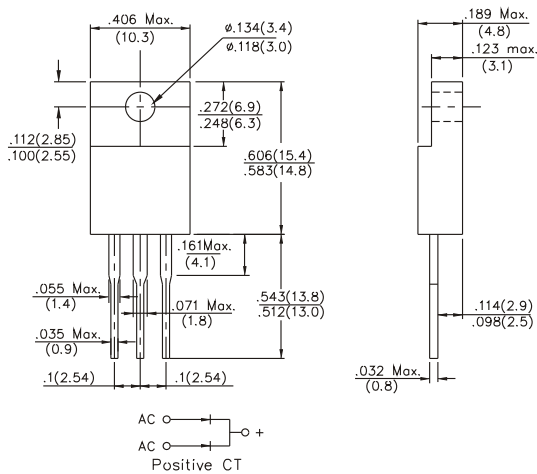

Dimensions in inches and (millimeters)

### FEATURES

- Schottky Barrier Chip
- Guard Ring Transient Protection
- High Current Capability, Low Forward
- Low Reverse Leakage Current
- High surge Current Capability
- Plastic Material has UL Flammability Classification 94V-0
- High temperature soldering : 260°C/10seconds at terminals
- Pb free product are available : 99% Sn above can meet RoHS
- environment substance directive request

### MECHANICAL DATA

Case : ITO220AB Molded plastic  
 Terminals : Plated Lead solderable per MIL-STD-202, Method 2026  
 Polarity : As Marked on Body  
 Mounting Position : Any  
 Weight : 2.24gram  
 Marking : Type Number

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Single phase half wave 60Hz, resistive or inductive load  
 For capacitive load, derate current by 20%

PARAMETER	SYMBOL	SB 1020FCT	SB 1030FCT	SB 1040FCT	SB 1050FCT	SB 1060FCT	SB 1080FCT	SB 10100FCT	SB 10150FCT	UNITS	
Peak Repetitive Reverse Voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	Volts	
Working Peak Reverse Voltage DC Blocking Voltage	$V_{RWM}$ $V_R$										
RMS Reverse Voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	Volts	
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	80	100	150	Volts	
Average Repetitive Output Current @ $T_c=95^\circ C$	$I_F$	10								Amps	
Non-Repetitive Peak Forward surge current 8.3ms Single Half Sine-Wave Superimosed on rated load (JEDEC Method)	$I_{FSM}$	150							120	Amps	
Forward Voltage @ $I_F=5A$	$V_F$	0.55		0.75		0.85		0.92		Volts	
Peak Reverse Current @ $T_A=25^\circ C$ AT Rated DC Blocking Voltage $T_A=100^\circ C$	$I_{RM}$	0.1				50				0.025 7	mA
Typical Junction Capacitance (Note 1)	$C_J$	700								pF	
Operating and Storage Temperature Range	$T_J$ $T_{STG}$	-55 to +150								$^\circ C$	

NOTE :

1. Measured at 1.0MHz and applied reverse Voltage of 4.0V D.C

# SB1020FCT thru SB10150FCT

## SCHOTTKY BARRIER RECTIFIER

### RATINGS AND CHARACTERISTIC CURVES SB1020FCT THRU SB10150FCT

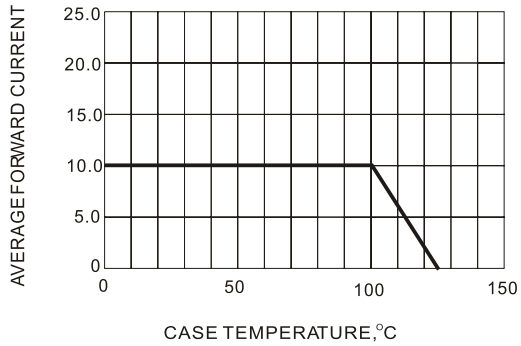


Fig.1- FORWARD CURRENT DERATING CURVE

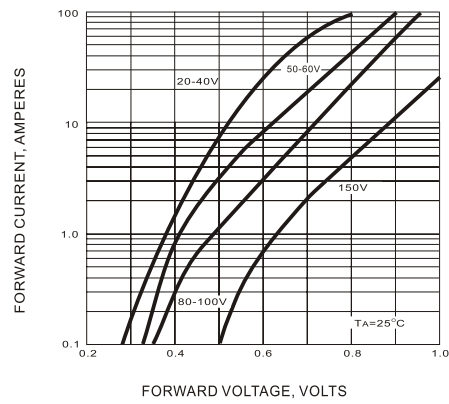


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

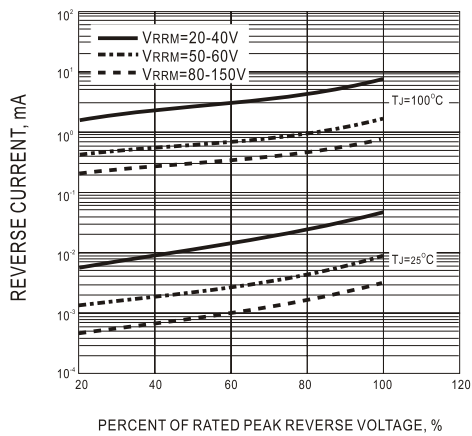


Fig.3- TYPICAL REVERSE CHARACTERISTIC

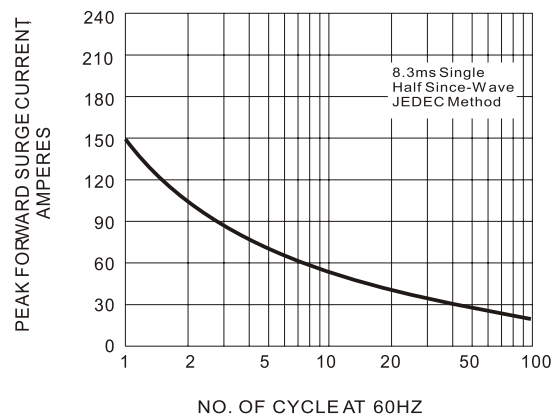


Fig.4- MAXIMUM NON-REPETITIVE SURGE CURRENT