








RoHS  
Compliant  
2002/95/EC

HSF

Level-1 Controlled Substances are banned

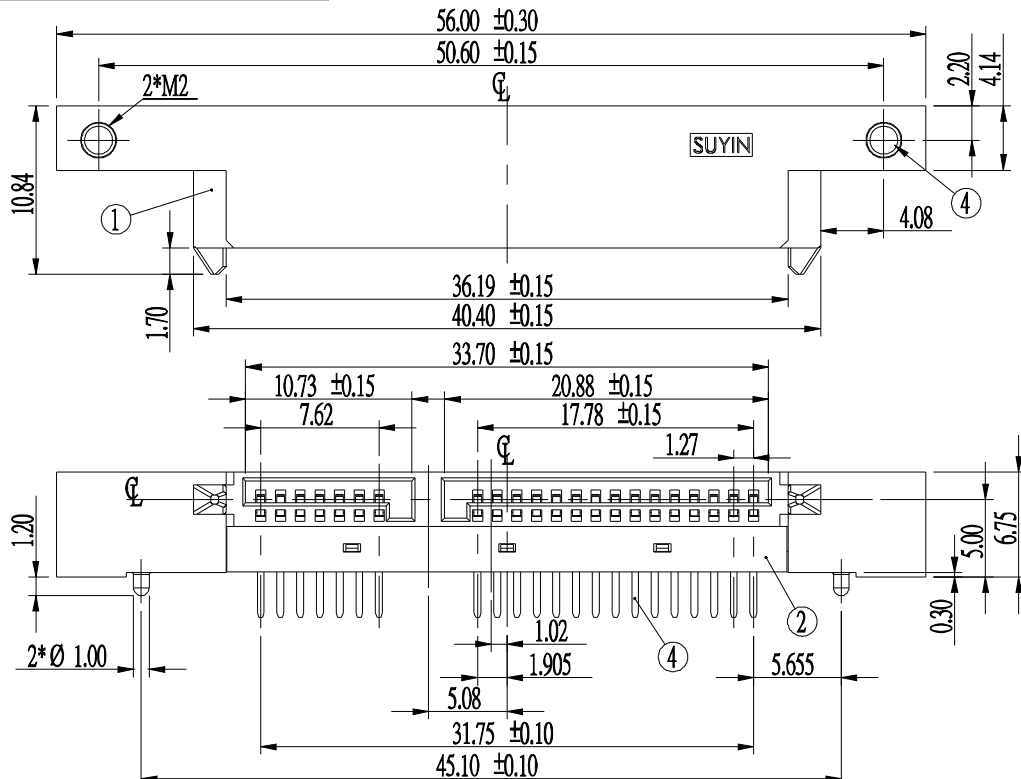

RECOMMENDED P.C.B LAYOUT (COMPONENT SIDE)  
DEFAULT THICKNESS=1.20mm (TOLERANCE=±0.05)

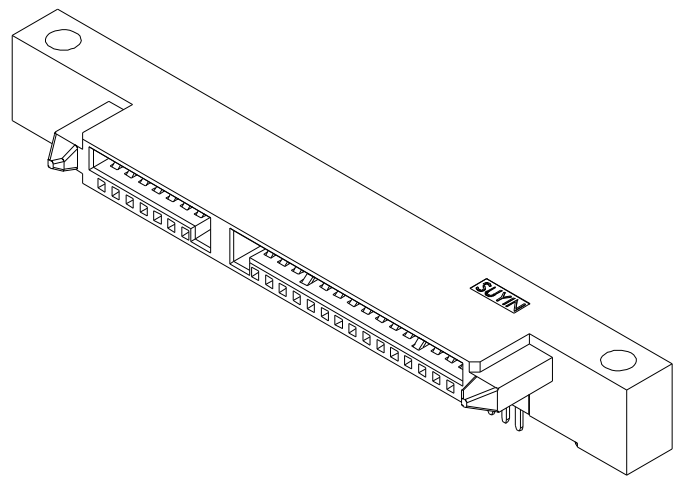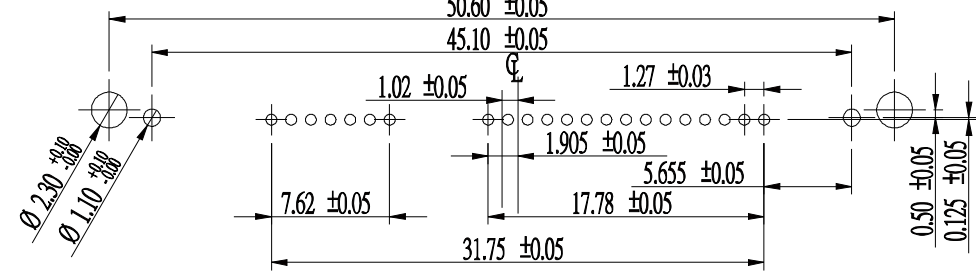

NOTE:  
127070FR022GX29ZR  
1. PLATING  
G1-5U" GOLD OVER NICKEL.  
G2-GOLD FLASH OVER 30 U"MIN. NICKEL.  
G3-10U" GOLD OVER NICKEL.  
G4-15U" GOLD OVER NICKEL.  
G5-30U" GOLD OVER NICKEL.  
G6-50U" GOLD OVER NICKEL.

NO.	DESCRIPTION	MATERIAL	COLOR	REMARK
4	NUT	COPPER AOLLY		NICKEL PLATED
3	TERMINAL	COPPER AOLLY		GOLD PLATED
2	COVER	HIGH TEMP	BLACK	UL 94V-0
1	HOUSING	HIGH TEMP	BLACK	UL 94V-0

**SUYIN**  
CONNECTOR

CUSTOMER COPY	TITLE: 1.27mm PITCH SERIAL ATA CONN.		
PART NO.	127070FR022GX29ZR		
PRODUCT SPEC.	127070FR		
FILE NAME.	D	127070FR022GX29ZR-C	
SCALE	2:1	UNIT:mm	A4
		SHEET: 1 of 2	

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	Angle	±'	DRAW	徐健龍	08'06/23
	0		NEW RELEASE	徐健龍	張裕奇		30 ~	±0.50	DESIGN	徐健龍	08'06/23
	PO	08'03/07	NEW	徐健龍	鄭家奇		10 ~ 30	±0.30	CHECK	唐毅	08'06/23
							~ 10	±0.15	APPRO.	張裕奇	08'06/23

Original:Draw: 徐健龍 Design: 徐健龍 Check: 唐毅 Appr: 鄭家奇 發行日期: 08'03/07