


- UL 94V-0 Recognized Material •
- UL 1446 Class B Insulation System •
- Excellent Insertion & Return Loss •
- Robust construction to withstand toughest soldering processes •

### Electrical Parameters @ 25° C


Frequency Range (MHz)	Impedance Ratio	Insertion Loss (dB)		
		.01-150 MHz	.02-100 MHz	.05-50 MHz
.01-150	1:1	3	2	1

### Schematic



Pins 2 & 5 Not Connected

### Package

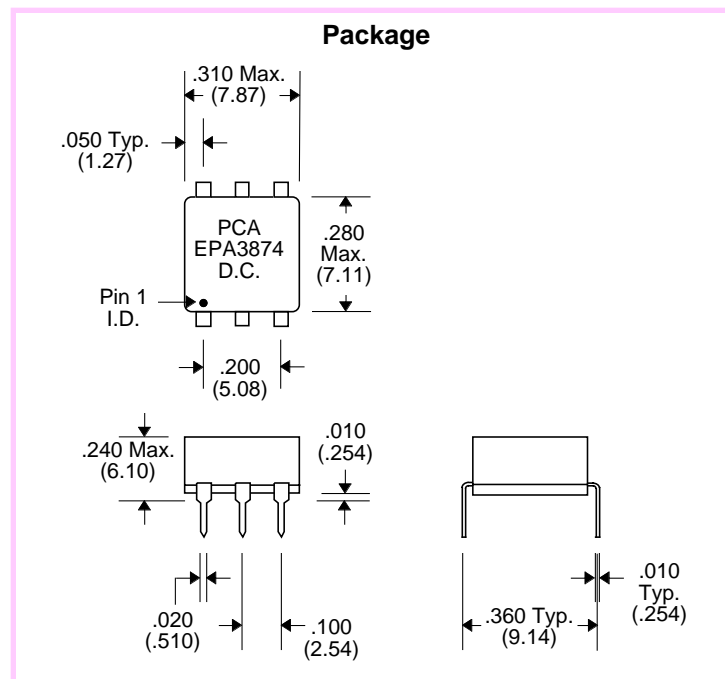

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25