


Specifications

Insulation Resistance: 1,000M Ω min. at 500V DC
 Dielectric Withstanding Voltage: 700V AC for 1 minute
 Contact Resistance: 30m Ω max. at 10mA/20mV max.
 Current Rating: 1A max.
 Operating Temperature Range: -55°C to +170°C
 Pin Count: 1020 contact pins

Materials and Finish

Housing: Polyethersulphone (PES), glass-filled
 Contacts: Beryllium Copper (BeCu)
 Plating: Gold over Nickel (B-class)
 Lever, Shaft: Stainless Steel



Part Number (Details)

NP236 - 1020 02 - *

Series No.

No. of Contact Pins


Design Number

Contact Style of Matching IC Pin

1 : $\varnothing 0.30 \sim \varnothing 0.45$

2 : $\varnothing 0.40 \sim \varnothing 0.50$

Outline Socket Dimensions

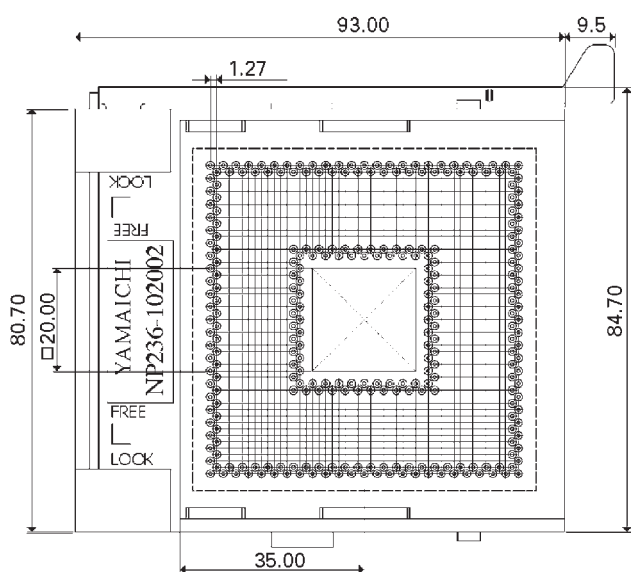

Recommended PC Board Layout

Top View from Socket

