



## VRLA Rechargeable Battery

# BPL7-12 (BPL7-12FR)



### FEATURES

- Maintenance free(no water topping-up required).
- No free acid(Non-spillable battery).
- Low self-discharge rate, lower than 3% capacity loss per month.
- Can be used in any orientation(excluding used inverted).

### APPLICATION

- UPS
- Laboratory Equipment
- Toy-Cars
- Power Packs
- Fishing Lights



### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	7.0Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	2600g(5.73lbs.)
Terminals	T2 (Faston Tab 250) T1 is optional
Internal Resistance	≤25m Ω (Fully Charged )
Max. Discharge Current	105 A (5 sec.)
Max. Charge Current	2.1 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)



ISO 9001	ngs ISO 9001 REGISTERED	UKAS REGISTERED
ISO14001	WSC ISO14001	
UL	UL MH19884	
CE	CE C4M20310-2474-E-16	
<ul style="list-style-type: none"> <li>● IEC61056</li> <li>● JIS C 8702</li> <li>● GB/T 19639</li> </ul>		

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

- **Length**  
151±1.5 (5.94±0.06)
- **Width**  
65±1.5 (2.56±0.06)
- **Container Height**  
93±1.5 (3.66±0.06)
- **Total Height**  
98±2.0 (3.86±0.08)

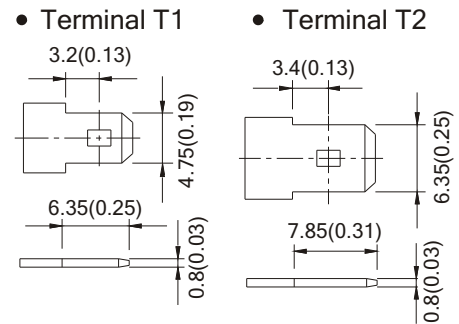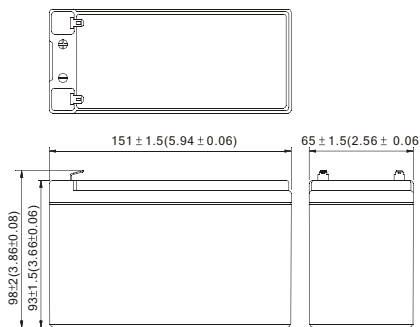

### Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell)	Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V		228.0	171.4	138.8	83.50	48.40	20.40	14.10	7.86	4.11
1.75V		264.0	185.7	145.3	86.70	49.80	20.80	14.30	7.98	4.20
1.70V		280.0	192.4	149.7	88.60	50.70	21.00	14.40	8.02	4.22
1.65V		293.0	197.0	153.2	89.90	51.40	21.20	14.50	8.04	4.23
1.60V		302.0	200.9	156.2	90.80	51.90	21.30	14.50	8.04	4.23

### Constant current discharge characteristics at 25 °C/77 °F

Unit: A

F.V. (V/cell)	Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V		20.54	15.09	12.07	7.076	4.067	1.700	1.175	0.655	0.343
1.75V		24.22	16.35	12.63	7.347	4.185	1.733	1.192	0.665	0.350
1.70V		25.69	16.94	13.02	7.508	4.261	1.750	1.200	0.668	0.352
1.65V		26.88	17.34	13.32	7.619	4.319	1.767	1.208	0.670	0.353
1.60V		27.71	17.68	13.58	7.695	4.361	1.775	1.208	0.670	0.353

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained hereinto.