

# MZ6310 / MZ6310C



## Double-Balanced Mixer

Rev. V3


### Features

- LO 2.5 TO 7 GHz
- RF 2.5 TO 5.5 GHz
- IF 0 TO 1.5 GHz
- LO DRIVE +10 dBm (nominal)
- MINIATURE PACKAGE
- LOW NOISE FIGURE 6.0 dB (TYP.)
- AVAILABLE WITH FIELD REPLACEABLE CONNECTORS

### Description

The MZ6310 is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric and ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

### Product Image

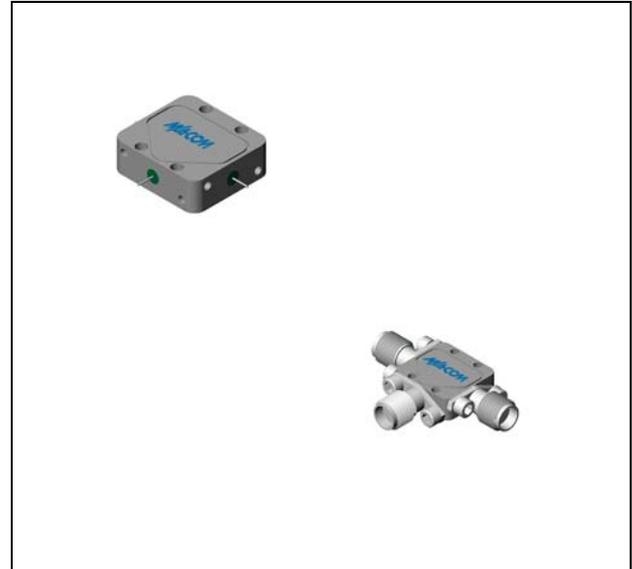

### Ordering Information

| Part Number | Package           |
|-------------|-------------------|
| MZ6310      | Versapac          |
| MZ6310C     | SMA Connectorized |

### Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +10$ dBm (Downconverter application only)

| Parameter  | Test Conditions  | Units | Typical | Guaranteed |               |
|--|--|-------|---------|------------|---------------|
|  |  |       |         | +25°C      | -54° to +85°C |
| SSB Conversion Loss (max) & SSB Noise Figure (max) | fR = 3 to 5.5 GHz, fL = 2.5 to 7 GHz, fl = 0 to 1.5 GHz<br>fR = 2.5 to 3 GHz, fL = 2.5 to 4.5 GHz, fl = 0 to 1.5 GHz | dB    | 6.0     | 7.5        | 8.0           |
|  |  |       | 7.0     | 9.0        | 9.5           |
| Isolation, L to R (min)                            | fL = 2.5 to 4 GHz<br>fL = 4 to 7 GHz   | dB    | 28      | 20         | 18            |
|  |  |       | 45      | 30         | 28            |
| Isolation, L to I (min)                            | fL = 2.5 to 3.5 GHz<br>fL = 3.5 to 4 GHz<br>fL = 4 to 7 GHz  | dB    | 18      | 12         | 10            |
|  |  |       | 22      | 18         | 16            |
|  |  |       | 35      | 22         | 20            |
| 1 dB Conversion Comp.                              | fL = +10 dBm   | dBm   | +3      |            |               |
| Input IP3  | fR1 = 4 GHz at -10 dBm, fR2 = 4.01 GHz at -10 dBm,<br>fL = 2.8 GHz at +10 dBm  | dBm   | +15     |            |               |

# MZ6310 / MZ6310C




## Double-Balanced Mixer

Rev. V3

### Absolute Maximum Ratings


| Parameter             | Absolute Maximum                            |
|-----------------------|---|
| Operating Temperature | -54° C to +100°C                            |
| Storage Temperature   | -65°C to +100°C                             |
| Peak Input Power      | +23 dBm max @ +25°C<br>+20 dBm max @ +100°C |
| Peak Input Current    | mA DC                                       |

### Outline Drawing: Versapac \*

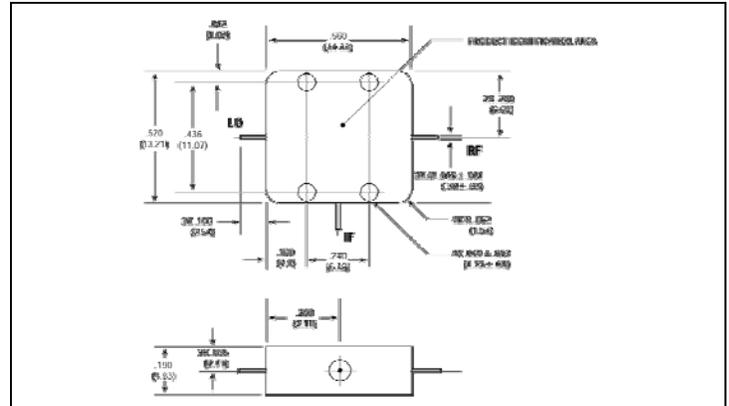

Weight: 4 grams (0.14 oz.) max




### Outline Drawing: SMA Connectorized \*

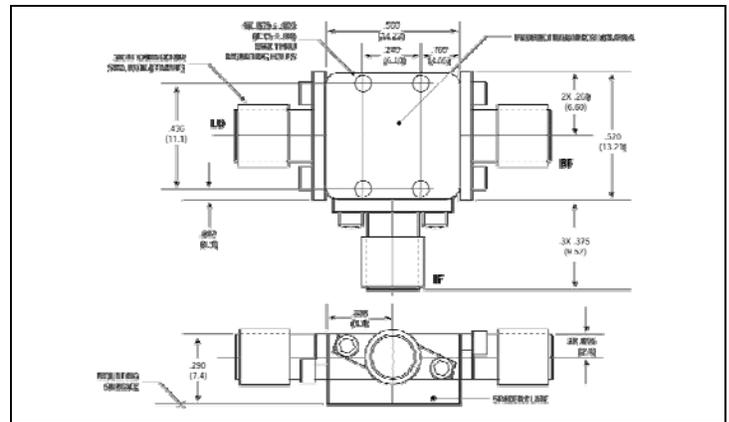




Weight: 13 grams (0.46 oz.) max

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.


Conversion Loss vs. Frequency

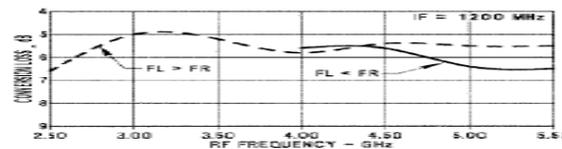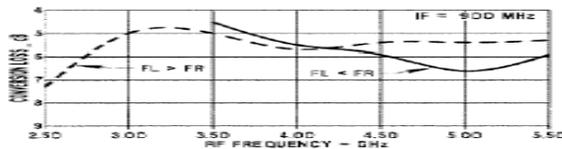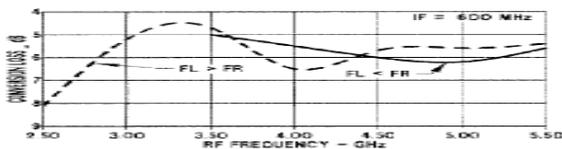


Conversion Loss vs. Frequency

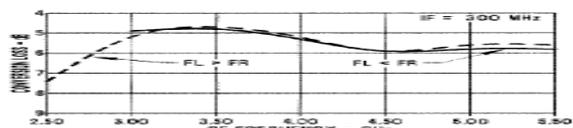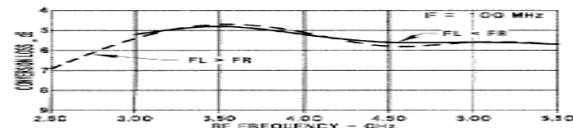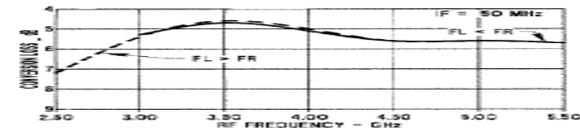

Conversion Loss vs. Frequency

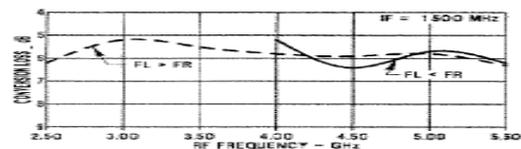

Isolation vs. LO Frequency

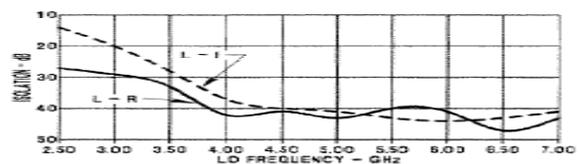

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400  
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588  
 Visit [www.macontech.com](http://www.macontech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.