


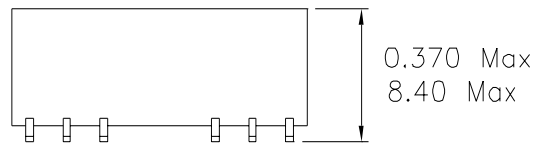


1. Dimensions:

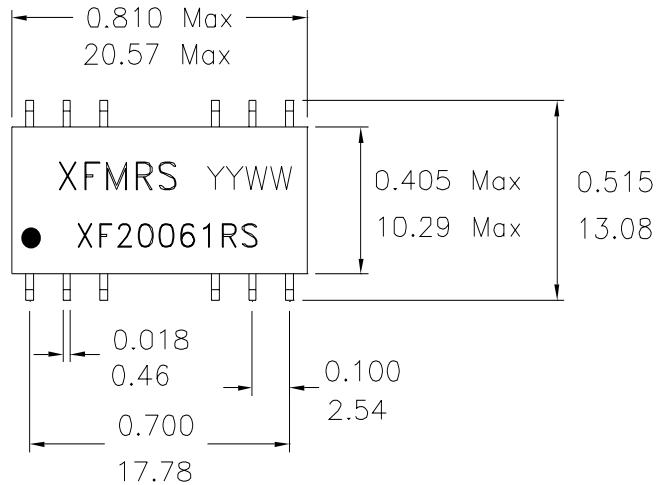


CO-PLANARITY \pm 0.004 Max
0.10 Max

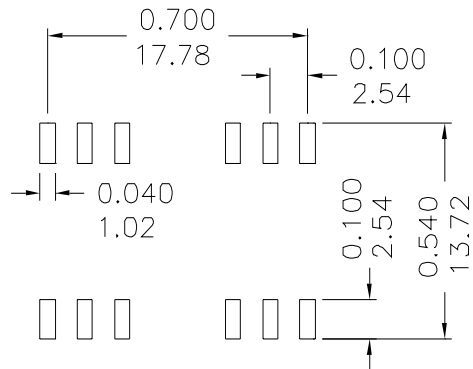

SUGGESTED FOOTPRINT

2. Schematic:

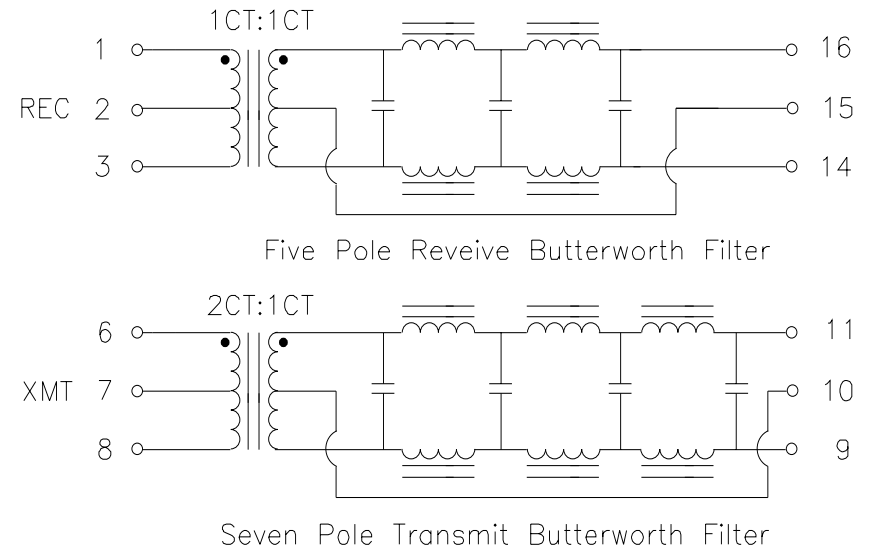

3. Electrical Specifications:

Isolation Voltage: 1500 Vrms (Input to Output)

Insertion Loss (1-10MHz): 1dB Maximum

Return Loss (1-10MHz): 15dB Minimum

Crosstalk (1-10MHz): 30dB Minimum

Attenuation @30MHz:

Transmit: 27dB Minimum

Receive: 18dB Minimum

Cut-Off Frequency: 17MHz Typical

INBAND VARIATION: 0.30dB Typical

I/O Impedance: 100 / 400 Ohms (Test Condition)

DOC Rev.: B/1

XFMRs Inc.	Title: 10Base-T FILTER	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx \pm 0.010 Inch Dimensions in Inch/mm	P/N: XF20061RS REV. B DWN. 李清儿 CHK. 孙悦 APP. Joe Huff
SCALE 2:1 SHT 1 OF 1		Dec-2-99 Dec-2-99 Dec-2-99