

### Features

- 2 dBm Output Level at 2255 MHz
- Channel Step Size : 200kHz
- 2<sup>nd</sup> Harmonic: < -20 dBc
- Spurious Level : < -70 dBc
- Lock Time : < 10ms
- 30mA Current Consumption

### Description

The plerow™ PLL synthesizer module was designed for use in wireless and wireline systems in a wide range of frequency from 50 MHz to 6 GHz. ASB's PLL provides exceptionally low spurious and phase noise performance with fast locking time and low current consumption. All products are available in a surface-mount type package.



### Specifications

Parameter	Unit	Min.	Typical	Max.
Frequency Range	MHz	2225	2255	2285
Output Power	dBm		2	
Supply Voltage	V		5.0	
Current Consumption	mA		30	35
Channel Step Size	kHz		200	
2 Harmonics (Fundamental)	dBc		-25	-20
Spurious Level	dBc		-72	-70
Lock Time	ms		3	10
Reference Frequency	MHz		13	
Reference Input Level	dBm	-5	0	5
Phase Noise (C / N)				
@ 1 kHz	dBc/Hz		-72	-68
@ 10 kHz			-100	-97
@ 100 kHz			-120	-115
Output Impedance	Ω		50	
Operating Temp. Range	°C	-40	25	85
Package Type & Size	mm	SMT, 19.0W×19.0L×5.8H		

1) Measurement conditions are as follows: T = 25°C, V<sub>CC</sub> = 5 V, Freq. = 2250 MHz, 50 ohm system.


### More Information

Website: [www.asb.co.kr](http://www.asb.co.kr)  
E-mail: [sales@asb.co.kr](mailto:sales@asb.co.kr)

Tel: (82) 42-528-7220  
Fax: (82) 42-528-7222

ASB Inc., 4th Fl. Venture Town  
Bldg., 367-17 Gojeong-Dong,  
Seo-Gu, Daejeon 302-716, Korea

### Outline Drawing

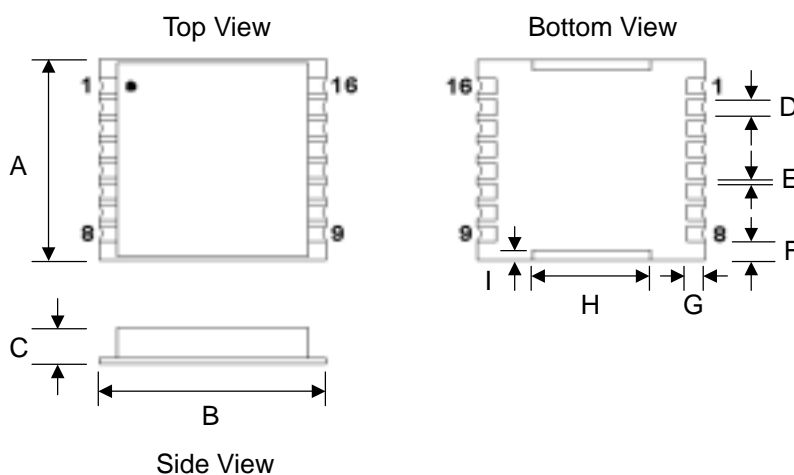

Pin Configuration	
1	CLOCK
2	DATA
3	ENABLE
4	GND
9	VCC (VCO)
13	RF OUT
15	VCP (PLL)
16	LOCK DETECT
Others	Ground

Dimension (mm)	
A	19.0
B	19.0
C	5.8
D	1.5
E	0.5
F	1.75
G	1.35
H	15.0
I	0.9

Tolerance: ± 0.2