


## Power MOSFET

PRODUCT SUMMARY		
V <sub>DS</sub> (V)	500	
R <sub>DS(on)</sub> ( $\Omega$ )	V <sub>GS</sub> = 10 V	0.85
Q <sub>G</sub> (Max.) (nC)	39	
Q <sub>gs</sub> (nC)	10	
Q <sub>gd</sub> (nC)	19	
Configuration	Single	

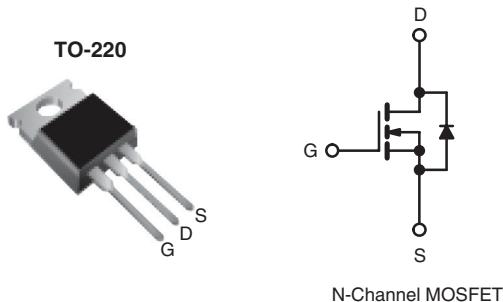

### FEATURES

- Ultra Low Gate Charge
- Reduced Gate Drive Requirement
- Enhanced 30 V V<sub>GS</sub> Rating
- Reduced C<sub>iss</sub>, C<sub>oss</sub>, C<sub>rss</sub>
- Extremely High Frequency Operation
- Repetitive Avalanche Rated
- Lead (Pb)-free Available



### DESCRIPTION

This new series of low charge Power MOSFETs achieve significantly lower gate charge over conventional MOSFETs. Utilizing the new LCDMOS technology, the device improvements are achieved without added product cost, allowing for reduced gate drive requirements and total system savings. In addition, reduced switching losses and improved efficiency are achievable in a variety of high frequency applications. Frequencies of a few MHz at high current are possible using the new low charge MOSFETs.

These device improvements combined with the proven ruggedness and reliability that are characteristic of Power MOSFETs offer the designer a new standard in power transistors for switching applications.

ORDERING INFORMATION			
Package	TO-220		
Lead (Pb)-free	IRF840LCPbF	SiHF840LC-E3	
SnPb	IRF840LC	SiHF840LC	

ABSOLUTE MAXIMUM RATINGS T <sub>C</sub> = 25 °C, unless otherwise noted			
PARAMETER		SYMBOL	LIMIT
Drain-Source Voltage		V <sub>DS</sub>	500
Gate-Source Voltage		V <sub>GS</sub>	± 30
Continuous Drain Current	V <sub>GS</sub> at 10 V	I <sub>D</sub>	8.0
			5.1
Pulsed Drain Current <sup>a</sup>		I <sub>DM</sub>	28
Linear Derating Factor			1.0
Single Pulse Avalanche Energy <sup>b</sup>		E <sub>AS</sub>	510 mJ
Repetitive Avalanche Current <sup>a</sup>		I <sub>AR</sub>	8.0 A
Repetitive Avalanche Energy <sup>a</sup>		E <sub>AR</sub>	13 mJ
Maximum Power Dissipation	T <sub>C</sub> = 25 °C	P <sub>D</sub>	125 W
Peak Diode Recovery dV/dt <sup>c</sup>		dV/dt	3.5 V/ns
Operating Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	- 55 to + 150 °C
Soldering Recommendations (Peak Temperature)	for 10 s		300 <sup>d</sup> °C
Mounting Torque	6-32 or M3 screw		10 lbf · in
			1.1 N · m

#### Notes

- Repetitive rating; pulse width limited by maximum junction temperature (see fig. 11).
- V<sub>DD</sub> = 50 V, starting T<sub>J</sub> = 25 °C, L = 14 mH, R<sub>G</sub> = 25 Ω, I<sub>AS</sub> = 8.0 A (see fig. 12).
- I<sub>SD</sub> ≤ 8.0 A, dI/dt ≤ 100 A/μs, V<sub>DD</sub> ≤ V<sub>DS</sub>, T<sub>J</sub> ≤ 150 °C.
- 1.6 mm from case.

\* Pb containing terminations are not RoHS compliant, exemptions may apply

**THERMAL RESISTANCE**





PARAMETER	SYMBOL	TYP.	MAX.	UNIT
Maximum Junction-to-Ambient	$R_{thJA}$	-	62	°C/W
Case-to-Sink, Flat, Greased Surface	$R_{thCS}$	0.50	-	
Maximum Junction-to-Case (Drain)	$R_{thJC}$	-	1.0	

**SPECIFICATIONS**  $T_J = 25^\circ\text{C}$ , unless otherwise noted

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT	
<b>Static</b>								
Drain-Source Breakdown Voltage	$V_{DS}$	$V_{GS} = 0 \text{ V}$ , $I_D = 250 \mu\text{A}$		500	-	-	V	
$V_{DS}$ Temperature Coefficient	$\Delta V_{DS}/T_J$	Reference to $25^\circ\text{C}$ , $I_D = 1 \text{ mA}$		-	0.63	-	$\text{V}/^\circ\text{C}$	
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$ , $I_D = 250 \mu\text{A}$		2.0	-	4.0	V	
Gate-Source Leakage	$I_{GSS}$	$V_{GS} = \pm 20 \text{ V}$		-	-	$\pm 100$	nA	
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 500 \text{ V}$ , $V_{GS} = 0 \text{ V}$		-	-	25	$\mu\text{A}$	
		$V_{DS} = 400 \text{ V}$ , $V_{GS} = 0 \text{ V}$ , $T_J = 125^\circ\text{C}$		-	-	250		
Drain-Source On-State Resistance	$R_{DS(on)}$	$V_{GS} = 10 \text{ V}$	$I_D = 4.8 \text{ A}^b$	-	-	0.85	$\Omega$	
Forward Transconductance	$g_{fs}$	$V_{DS} = 50 \text{ V}$ , $I_D = 4.8 \text{ A}^b$		4.0	-	-	S	
<b>Dynamic</b>								
Input Capacitance	$C_{iss}$	$V_{GS} = 0 \text{ V}$ , $V_{DS} = 25 \text{ V}$ , $f = 1.0 \text{ MHz}$ , see fig. 5		-	1100	-	pF	
Output Capacitance	$C_{oss}$			-	170	-		
Reverse Transfer Capacitance	$C_{rss}$			-	18	-		
Total Gate Charge	$Q_g$	$V_{GS} = 10 \text{ V}$	$I_D = 8.0 \text{ A}$ , $V_{DS} = 400 \text{ V}$ see fig. 6 and 13 <sup>b</sup>	-	-	39	nC	
Gate-Source Charge	$Q_{gs}$			-	-	10		
Gate-Drain Charge	$Q_{gd}$			-	-	19		
Turn-On Delay Time	$t_{d(on)}$			-	12	-		
Rise Time	$t_r$	$V_{DD} = 250 \text{ V}$ , $I_D = 8.0 \text{ A}$ , $R_G = 9.1 \Omega$ , $R_D = 30 \Omega$ see fig. 10 <sup>b</sup>		-	25	-	ns	
Turn-Off Delay Time	$t_{d(off)}$			-	27	-		
Fall Time	$t_f$			-	19	-		
Internal Drain Inductance	$L_D$			-	4.5	-	nH	
Internal Source Inductance	$L_S$	Between lead, 6 mm (0.25") from package and center of die contact		-	7.5	-		
<b>Drain-Source Body Diode Characteristics</b>								
Continuous Source-Drain Diode Current	$I_S$	MOSFET symbol showing the integral reverse p - n junction diode		-	-	8.0	A	
Pulsed Diode Forward Current <sup>a</sup>	$I_{SM}$			-	-	28		
Body Diode Voltage	$V_{SD}$	$T_J = 25^\circ\text{C}$ , $I_S = 8.0 \text{ A}$ , $V_{GS} = 0 \text{ V}^b$		-	-	2.0	V	
Body Diode Reverse Recovery Time	$t_{rr}$	$T_J = 25^\circ\text{C}$ , $I_F = 8.0 \text{ A}$ , $dl/dt = 100 \text{ A}/\mu\text{s}^b$		-	490	740	ns	
Body Diode Reverse Recovery Charge	$Q_{rr}$			-	3.0	4.5	$\mu\text{C}$	
Forward Turn-On Time	$t_{on}$	Intrinsic turn-on time is negligible (turn-on is dominated by $L_S$ and $L_D$ )						

**Notes**

- a. Repetitive rating; pulse width limited by maximum junction temperature (see fig. 11).  
b. Pulse width  $\leq 300 \mu\text{s}$ ; duty cycle  $\leq 2\%$ .

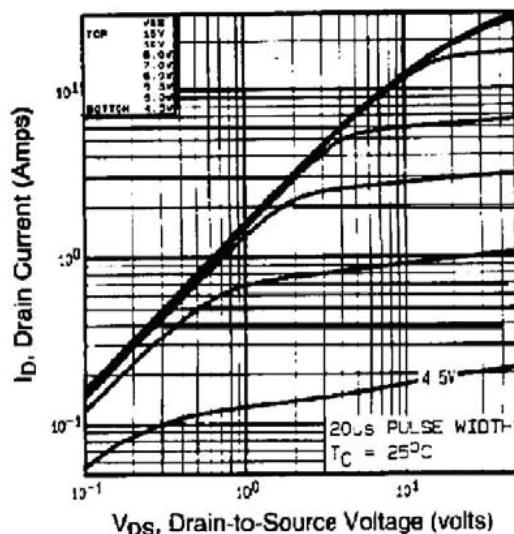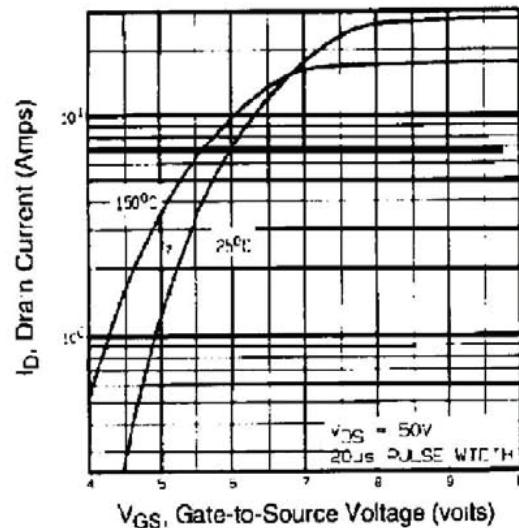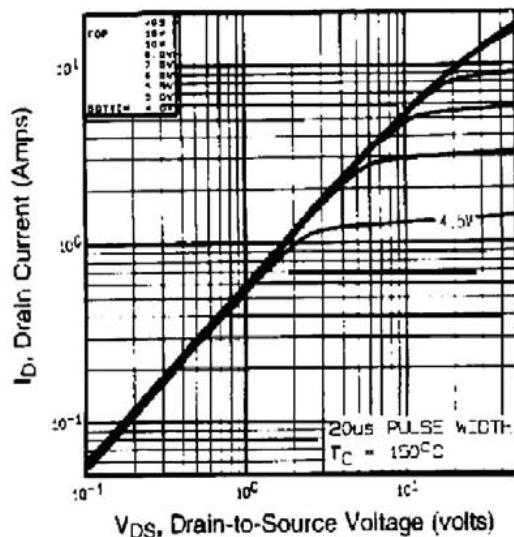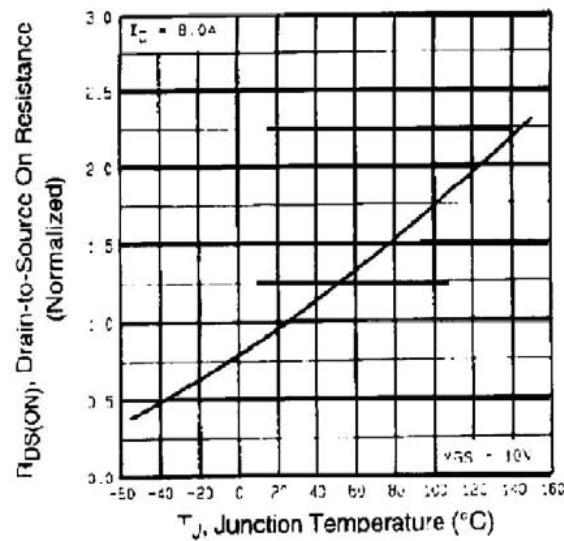**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted

**Fig. 1 - Typical Output Characteristics,  $T_C = 25 \text{ } ^\circ\text{C}$** 

**Fig. 3 - Typical Transfer Characteristics**

**Fig. 2 - Typical Output Characteristics,  $T_C = 150 \text{ } ^\circ\text{C}$** 

**Fig. 4 - Normalized On-Resistance vs. Temperature**

# IRF840LC, SiHF840LC

Vishay Siliconix

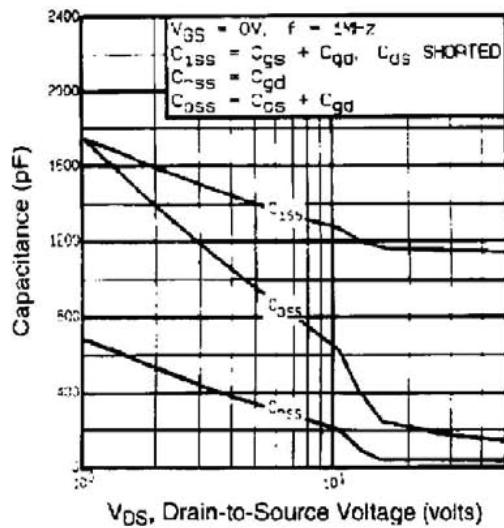


Fig. 5 - Typical Capacitance vs. Drain-to-Source Voltage

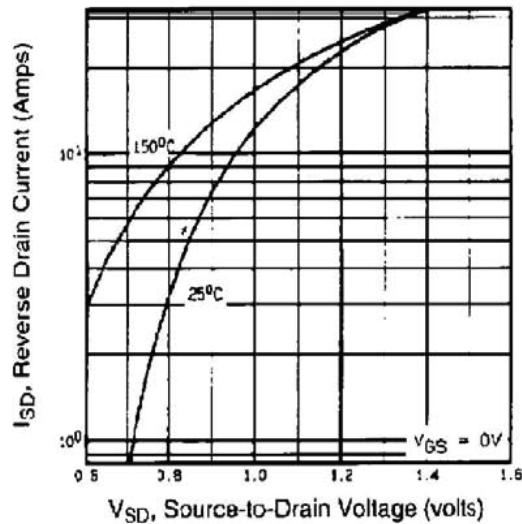


Fig. 7 - Typical Source-Drain Diode Forward Voltage

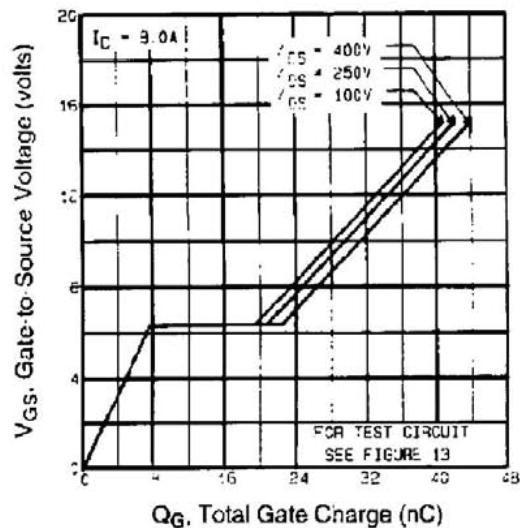


Fig. 6 - Typical Gate Charge vs. Gate-to-Source Voltage

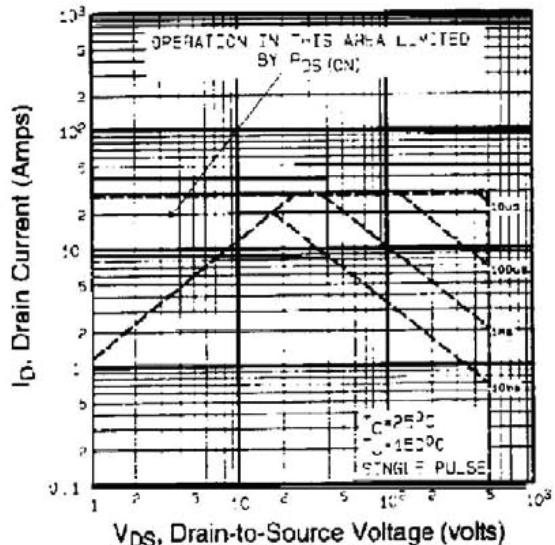


Fig. 8 - Maximum Safe Operating Area

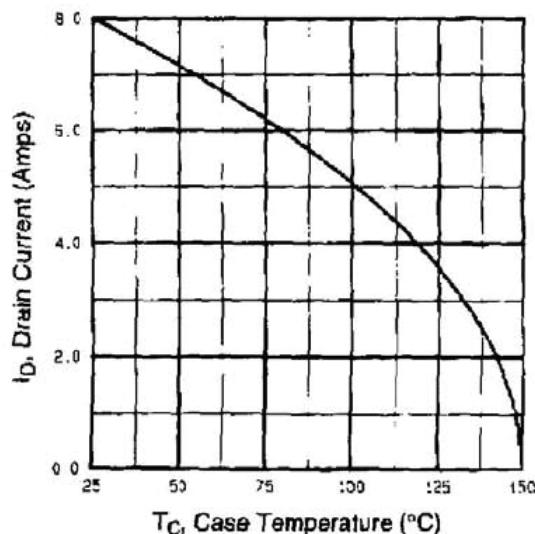


Fig. 9 - Maximum Drain Current vs. Case Temperature

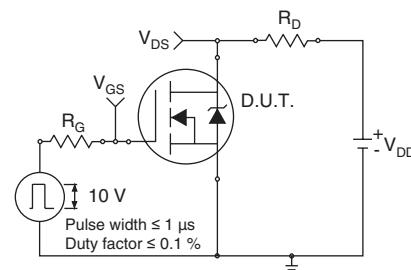


Fig. 10a - Switching Time Test Circuit

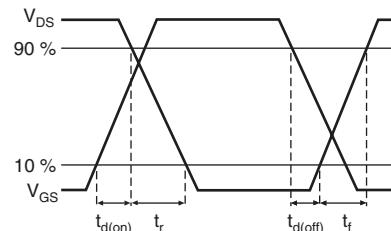


Fig. 10b - Switching Time Waveforms

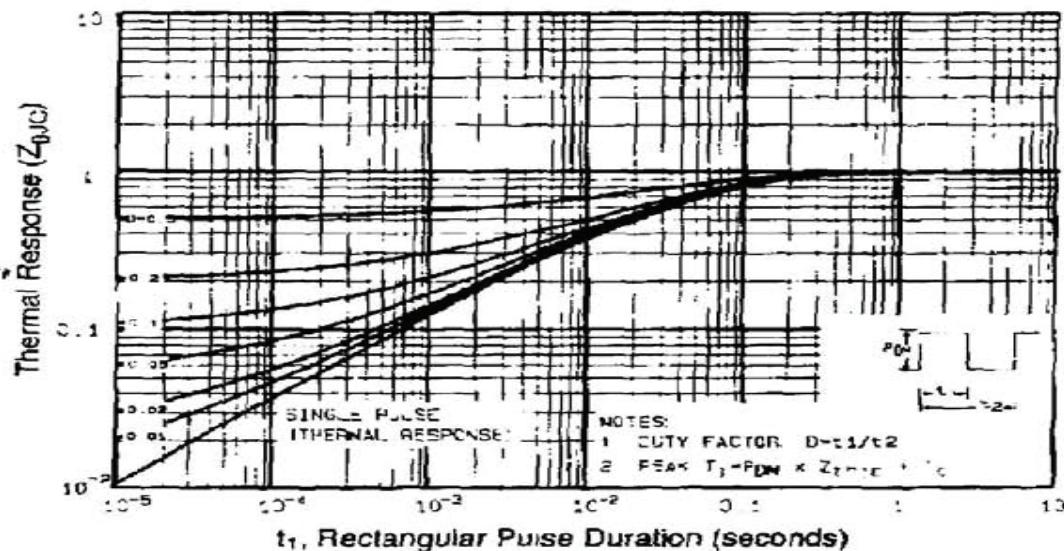


Fig. 11 - Maximum Effective Transient Thermal Impedance, Junction-to-Case

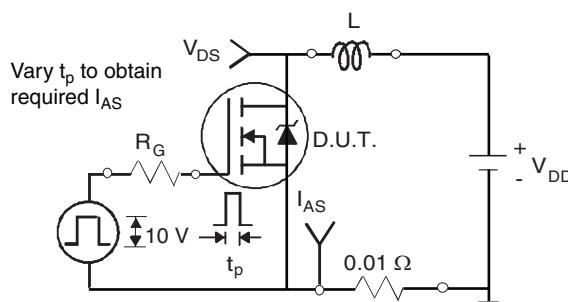


Fig. 12a - Unclamped Inductive Test Circuit

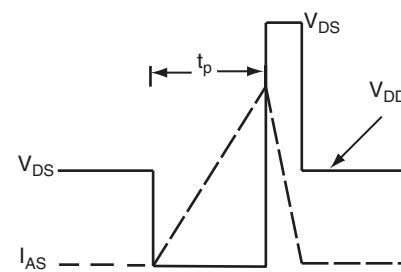


Fig. 12b - Unclamped Inductive Waveforms

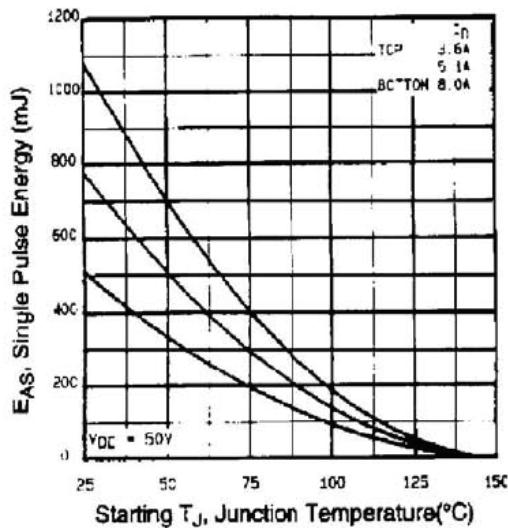


Fig. 12c - Maximum Avalanche Energy vs. Drain Current

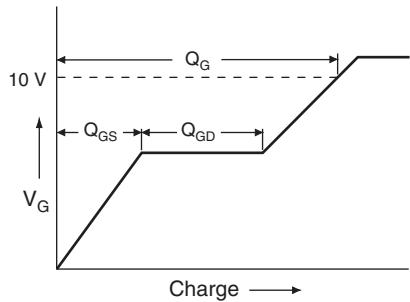


Fig. 13a - Basic Gate Charge Waveform



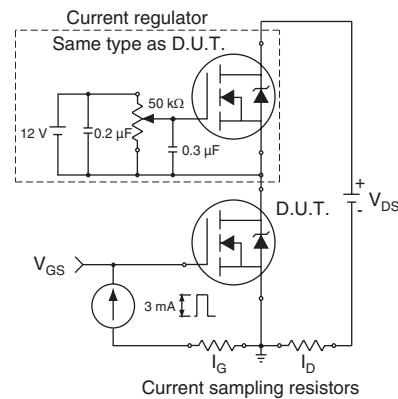


Fig. 13b - Gate Charge Test Circuit

### Peak Diode Recovery dV/dt Test Circuit

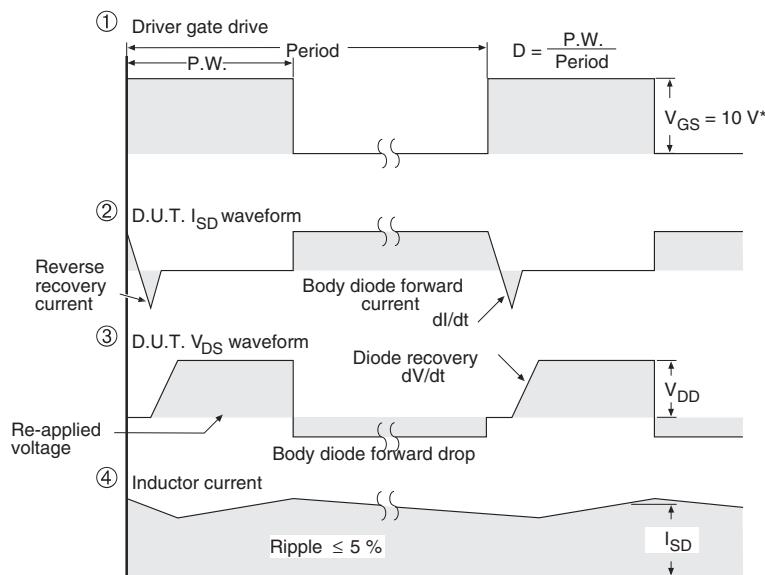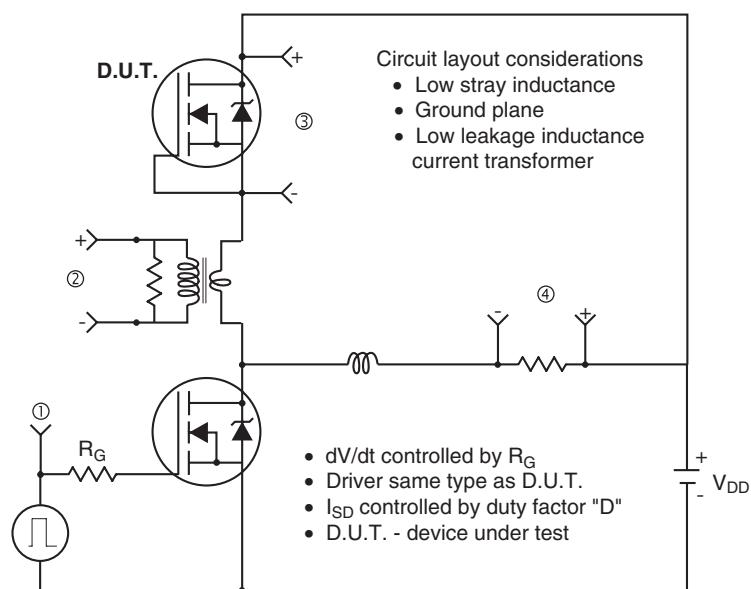

\*  $V_{GS} = 5 \text{ V}$  for logic level devices

**Fig. 14 - For N-Channel**

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <http://www.vishay.com/ppg?91067>.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.