



**CHENMKO ENTERPRISE CO.,LTD**

**CHEMX3PT**

**SURFACE MOUNT  
Dual Silicon Transistor**

VOLTAGE 50 Volts CURRENT 150 mAmpere

Lead free devices

**APPLICATION**

\* Small Signal Amplifier .

**FEATURE**




- \* Small surface mounting type. (SOT-563)
- \* Low saturation voltage  $V_{CE(sat)}=0.4V(max.)(I_c=50mA)$
- \* Low cob.  $C_{ob}=2.0pF(Typ.)$
- \*  $P_c= 150mW$  (Total),120mW per element must not be exceeded.
- \* High saturation current capability.
- \* Two the 2SC2412K in one package.
- \* NPN Silicon Transistor

**MARKING**

\* X3

**SOT-563**

**CIRCUIT**



Dimensions in millimeters

**SOT-563**

**2SC2412K LIMITING VALUES**

MAXIMUM RATINGS ( At  $T_A = 25^{\circ}C$  unless otherwise noted )

RATINGS	CONDITION	SYMBOL	MIN.	MAX.	UNITS
Collector - Base Voltage	Open Emitter	$V_{CB0}$	-	60	Volts
Collector - Emitter Voltage	Open Base	$V_{CE0}$	-	50	Volts
Emitter - Base Voltage	Open Collector	$V_{EB0}$	-	7	Volts
Collector Current DC		$I_c$	-	150	mAmps
Peak Collector Current		$I_{CM}$	-	150	mAmps
Peak Base Current		$I_{BM}$	-	15	mAmps
Total Power Dissipation	$T_A \leq 25^{\circ}C$ ; Note 1	$P_{TOT}$	-	150	mW
Storage Temperature		$T_{STG}$	-55	+150	$^{\circ}C$
Junction Temperature		$T_J$	-	+150	$^{\circ}C$
Operating Ambient Temperature		$T_{AMB}$	-55	+150	$^{\circ}C$

**Note**

1. Transistor mounted on ceramic substrate 50mmX50mmX0.8t.

## RATING CHARACTERISTIC CURVES ( CHEMX3PT )

### 2SC2412K CHARACTERISTICS

ELECTRICAL CHARACTERISTICS ( At  $T_A = 25^{\circ}\text{C}$  unless otherwise noted )

PARAMETERS	CONDITION	SYMBOL	MIN.	TYPE	MAX.	UNITS
Collector-base breakdown voltage	$I_C=50\mu\text{A}$	$BV_{CBO}$	60	-	-	Volts
Collector-emitter breakdown voltage	$I_C=1\text{mA}$	$BV_{CEO}$	50	-	-	Volts
Emitter-base breakdown voltage	$I_E=50\mu\text{A}$	$BV_{EBO}$	7	-	-	Volts
Collector Cut-off Current	$I_E=0; V_{CB}=60\text{V}$	$I_{CBO}$	-	-	0.1	
Emitter Cut-off Current	$I_C=0; V_{EB}=7\text{V}$	$I_{CEO}$	-	-	0.1	$\mu\text{A}$
DC Current Gain	$V_{CE}=6\text{V}$ $I_C=1\text{mA}$	$h_{FE}$	120	-	560	
Collector-Emitter Saturation Voltage	$I_C=50\text{mA}; I_B=5\text{mA}$	$V_{CEsat}$	-	-	0.4	Volts
Output Collector Capacitance	$I_E=I_E=0; V_{CB}=12\text{V};$ $f=1\text{MHz}$	$C_{ob}$	-	2	3.5	$\text{pF}$
Transition Frequency	$I_C=2\text{mA}; V_{CE}=12\text{V};$ $f=100\text{MHz}$	$f_T$	-	180	-	$\text{MHz}$

# RATING CHARACTERISTIC CURVES ( CHEMX3PT )

## 2SC2412K Typical Electrical Characteristics

Fig.1 Grounded emitter propagation characteristics

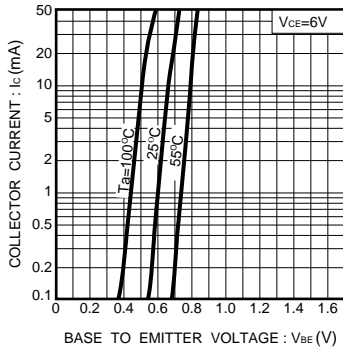


Fig.2 Grounded emitter output characteristics

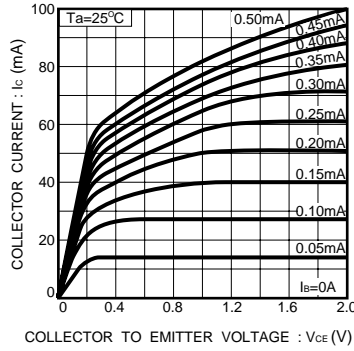


Fig.3 DC current gain vs. collector current (1)

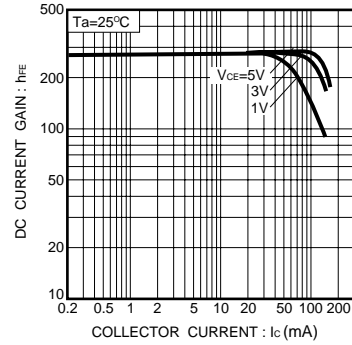


Fig.4 DC current gain vs. collector current (2)

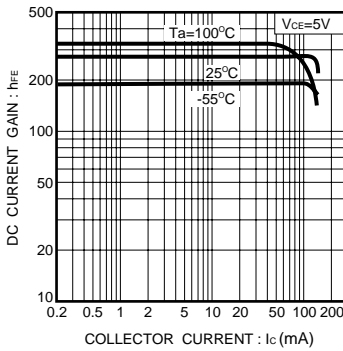


Fig.5 Collector-emitter saturation voltage vs. collector current

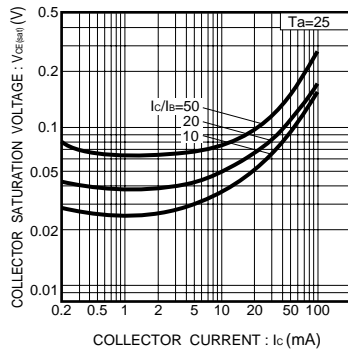


Fig.6 Collector-emitter saturation voltage vs. collector current

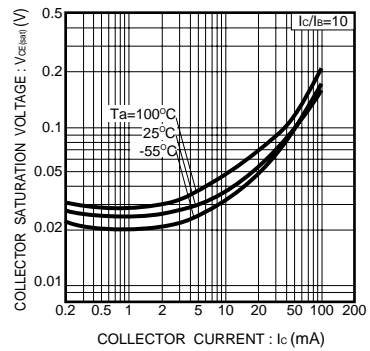


Fig.7 Gain bandwidth product vs. emitter current

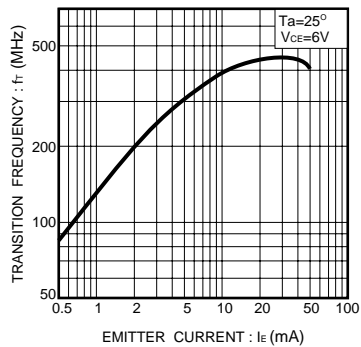


Fig.8 Base-collector time constant vs. emitter current

