



**CHENMKO ENTERPRISE CO.,LTD**

**SURFACE MOUNT**

**N-Channel Enhancement Mode Field Effect Transistor**

**VOLTAGE 30 Volts CURRENT 7.8 Ampere**

**CHM3178JPT**

*Lead free devices*

#### APPLICATION

- \* Servo motor control.
- \* Power MOSFET gate drivers.
- \* Other switching applications.


#### FEATURE

- \* Small flat package. (SO-8 )
- \* Super high dense cell design for extremely low R<sub>DSON</sub>.
- \* High power and current handing capability.
- \* Lead free product is acquired.


#### CONSTRUCTION

- \* N-Channel Enhancement

#### CIRCUIT



**SO-8**

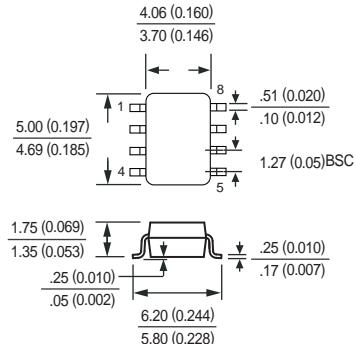

Dimensions in millimeters

**SO-8**

#### Absolute Maximum Ratings

T<sub>A</sub> = 25°C unless otherwise noted

| Symbol           | Parameter                          | CHM3178JPT | Units |
|------------------|------------------------------------|------------|-------|
| V <sub>DSS</sub> | Drain-Source Voltage               | 30         | V     |
| V <sub>GSS</sub> | Gate-Source Voltage                | ±20        | V     |
| I <sub>D</sub>   | Maximum Drain Current - Continuous | 7.8        | A     |
|                  | - Pulsed (Note 3)                  | 30         |       |
| P <sub>D</sub>   | Maximum Power Dissipation          | 2000       | mW    |
| T <sub>J</sub>   | Operating Temperature Range        | -55 to 150 | °C    |
| T <sub>STG</sub> | Storage Temperature Range          | -55 to 150 | °C    |

Note : 1. Surface Mounted on FR4 Board , t <=10sec

2. Pulse Test , Pulse width <= 300us , Duty Cycle <= 2%

3. Repetitive Rating , Pulse width limited by maximum junction temperature

4. Guaranteed by design , not subject to production testing

#### Thermal characteristics

|                  |  |      |      |
|------------------|--|------|------|
| R <sub>θJA</sub> | Thermal Resistance, Junction-to-Ambient (Note 1) | 62.5 | °C/W |
| 2006-09          |  |      |      |

## RATING CHARACTERISTIC CURVES ( CHM3178JPT )

**Electrical Characteristics**  $T_A = 25^\circ\text{C}$  unless otherwise noted

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|--------|-----------|------------|-----|-----|-----|-------|
|--------|-----------|------------|-----|-----|-----|-------|

### OFF CHARACTERISTICS

|             |                                 |  |    |  |      |               |
|-------------|---------------------------------|--|----|--|------|---------------|
| $BV_{DSS}$  | Drain-Source Breakdown Voltage  | $V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$  | 30 |  |      | V             |
| $I_{DS(0)}$ | Zero Gate Voltage Drain Current | $V_{DS} = 30 \text{ V}, V_{GS} = 0 \text{ V}$  |    |  | 1    | $\mu\text{A}$ |
| $I_{GSSF}$  | Gate-Body Leakage               | $V_{GS} = 20 \text{ V}, V_{DS} = 0 \text{ V}$  |    |  | +100 | nA            |
| $I_{GSSR}$  | Gate-Body Leakage               | $V_{GS} = -20 \text{ V}, V_{DS} = 0 \text{ V}$ |    |  | -100 | nA            |

### ON CHARACTERISTICS (Note 2)

|              |                                   |   |   |    |    |                  |
|--------------|-----------------------------------|---|---|----|----|------------------|
| $V_{GS(th)}$ | Gate Threshold Voltage            | $V_{DS} = V_{GS}, I_D = 250 \mu\text{A}$  | 1 |    | 3  | V                |
| $R_{DS(ON)}$ | Static Drain-Source On-Resistance | $V_{GS}=10 \text{ V}, I_D=6.3 \text{ A}$  |   | 18 | 22 | $\text{m}\Omega$ |
|              |                                   | $V_{GS}=4.5 \text{ V}, I_D=5.0 \text{ A}$ |   | 24 | 30 |                  |

### SWITCHING CHARACTERISTICS (Note 4)

|           |                    |   |  |      |    |    |
|-----------|--------------------|---|--|------|----|----|
| $Q_g$     | Total Gate Charge  | $V_{DS}=15 \text{ V}, I_D=6 \text{ A}$<br>$V_{GS}=5 \text{ V}$                              |  | 10.4 | 13 | nC |
| $Q_{gs}$  | Gate-Source Charge |   |  | 3.5  |    |    |
| $Q_{gd}$  | Gate-Drain Charge  |   |  | 3.8  |    |    |
| $t_{on}$  | Turn-On Time       | $V_{DD}=15 \text{ V}$<br>$I_D = 1 \text{ A}, V_{GS} = 10 \text{ V}$<br>$R_{GEN} = 6 \Omega$ |  | 16   | 30 | nS |
| $t_r$     | Rise Time          |   |  | 9    | 20 |    |
| $t_{off}$ | Turn-Off Time      |   |  | 31   | 60 |    |
| $t_f$     | Fall Time          |   |  | 10   | 20 |    |


### DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS

|          |                                    |  |  |  |     |   |
|----------|------------------------------------|--|--|--|-----|---|
| $I_s$    | Drain-Source Diode Forward Current | (Note 1)   |  |  | 2.3 | A |
| $V_{SD}$ | Drain-Source Diode Forward Voltage | $I_s = 2.3 \text{ A}, V_{GS} = 0 \text{ V}$ (Note 2) |  |  | 1.2 | V |


## RATING CHARACTERISTIC CURVES ( CHM3178JPT )

### Typical Electrical Characteristics


**Figure 1. Output Characteristics**

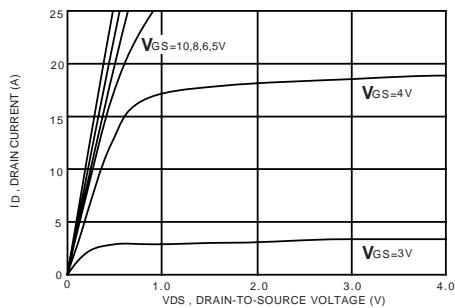


**Figure 2. Transfer Characteristics**

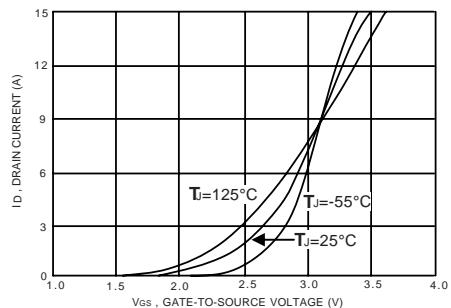

**Figure 3. Gate Charge**

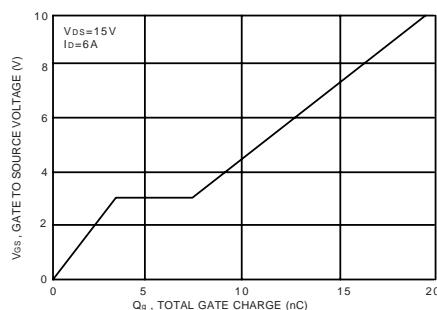

**Figure 4. On-Resistance Variation with Temperature**

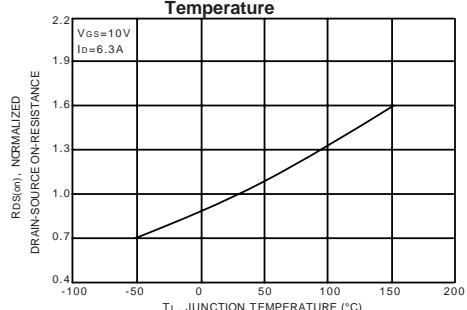

**Figure 5. Gate Threshold Variation with Temperature**

