

Wideband Load Insensitive Mixer

Rev. V2


Features

- LO 50 TO 5000 MHz
- RF 50 TO 5000 MHz
- IF 50 TO 3000 MHz
- LO DRIVE +10 dBm (NOMINAL)
- INSENSITIVE TO SYSTEM LOAD MISMATCH
- HIGH INTERCEPT: +18 dBm (TYP.)

Description

The M5T is a termination insensitive mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky bridge quad diodes, broadband ferrite baluns and internal loads to provide excellent performance without degradation due to external VSWR mismatches. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in semi-automated and automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

Product Image

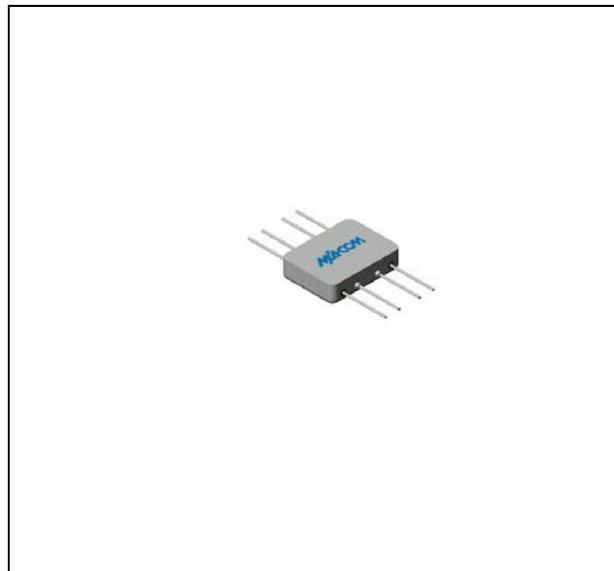

Ordering Information

Part Number	Package
M5T	Flatpack

Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +10$ dBm (Downconverter application only)

Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-54° to +85°C
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 0.05 to 1.5 GHz, fL = 0.05 to 1.5 GHz, fI = 0.05 to 1.5 GHz fR = 1.5 to 3 GHz, fL = 1.5 to 3 GHz, fI = 0.05 to 3.0 GHz fR = 3.0 to 5.0 GHz, fL = 3.0 to 5.0 GHz, fI = 0.05 to 3.0 GHz	dB	7.2	8.5	9.2
			8.0	9.0	9.7
			9.0	11.3	12.0
Isolation, L to R (min)	fL = 0.05 to 1.0 GHz fL = 1.0 to 5.0 GHz	dB	35	25	23
			33	23	20
Isolation, L to I (min)	fL = 0.05 to 1.0 GHz fL = 1.0 to 5.0 GHz	dB	40	32	30
			35	22	20
Isolation, R to I (min)	fR = 0.05 to 5.0 GHz	dB	33		
1 dB Conversion Comp.	fL = +10 dBm	dBm	+7		
Input IP3 (min.)	fL = 0.05 to 5.0 GHz, fR = 0.05 to 5.0 GHz, fI = 0.05 to 3.0 GHz	dBm	+18		
VSWR	R-Port fR = 0.05 to 5.0 GHz, L-Port fL = 0.05 to 5.0 GHz, I-Port fI = 0.05 to 3.0 GHz		2.0:1 1.8:1 1.5:1		

1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.


Wideband Load Insensitive Mixer

Rev. V2

Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-54°C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+20 dBm max @ +25°C +17 dBm max @ +100°C
Peak Input Current	50 mA DC

Outline Drawing: Flatpack *

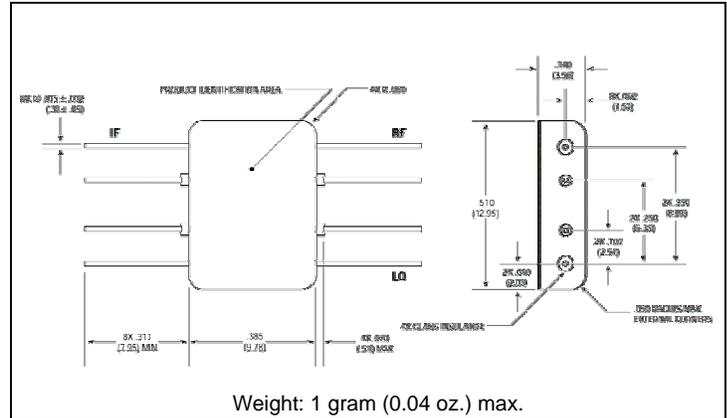

* Dimensions are inches (millimeters) ± 0.015 (0.38) unless otherwise specified.