

FEATURES

- Cispr 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 220g only
- Efficiency 84%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C



SPECIFICATION

Item	Model	
	SA06H12~17	SA06H17~24
Output Voltage	12V~17V	17V~24V
Output Rating	30W Max	30W Max
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	1.0A Maximum	
Inrush Current	60A Maximum	
Line Regulation	2% Maximum	
Load Regulation	± 5%	
Ripple & Noise	1% Maximum	
Efficiency	84% Typical	86% Typical
Temperature Coefficient	0.05%/°C	
Over-Voltage Protection	24V~34V Maximum	34V~48V Maximum
Operating Temperature	0~40°C	
Storage Temperature	-20~85°C	
Safety Description	UL, CUL, TUV, CB	

(*) : Under Development

(I/P) : In Process

Bothhand USA. e-mail: sales@bothhandusa.com <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434


ORDERING INFORMATION

SA06H 1 2 - 1 A

Output Plug List

Output Voltage

MECHANICAL

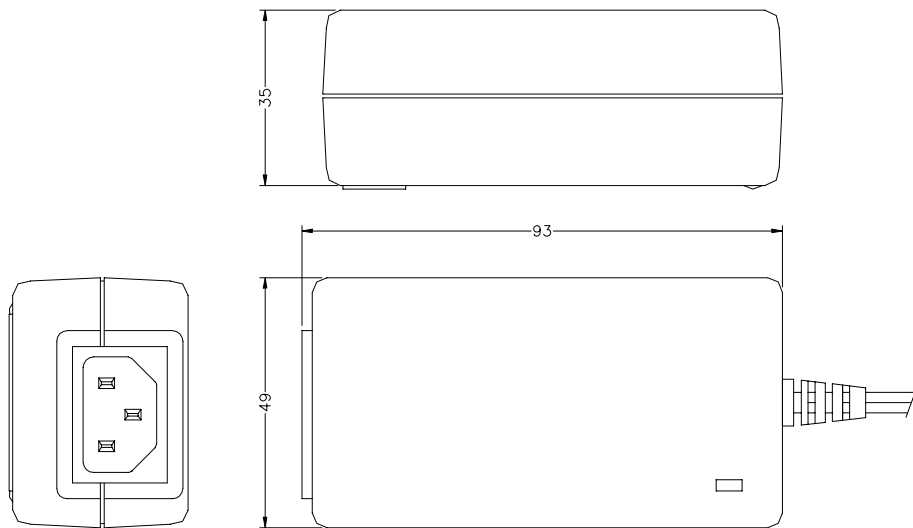

Unit: m.m.

Standard Output Cable:
18AWG, UL SPT-1, 1200mm



Bothhand USA. e-mail: sales@bothhandusa.com <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434