





Heyco® Flexible Grommeting

Extruded Serrated Grommeting—Roll Form

- Protects and insulates wires and cables from chafing against sharp panel edges.
- Serrated design particularly suited to irregularly shaped panel holes. (For regular round holes we recommend Heyco Snap Bushings or Heyco Shorty Bushings).
- Depending on the panel thickness, grommeting may grip tightly by itself. If not, a touch of epoxy will keep it in place.
- A wide range of sizes fits panel thicknesses from .036 (0,9mm) to .250" (6,4mm).
- A cost effective way to protect wire and cables from sharp edges of odd shaped openings.
- Six sizes can be cut to fit for no waste.

PANEL THICKNESS RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS							
Min.		Max.		Black	Natural		A Thickness Depth		B Outside Width		C Inside		Gap Reference	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.	
up to	→	.036	0,9	2220	2221	GR 36	.032	0,8	.125	3,2	.031	0,8	.018	0,5
.037	0,9	.071	1,8	2222	2223	GR 71	.032	0,8	.173	4,4	.109	2,7	.037	0,9
.072	1,8	.105	2,7	2224	2225	GR 105	.032	0,8	.173	4,4	.109	2,7	.060	1,5
.106	2,7	.164	4,2	2226	2227	GR 164	.047	1,2	.189	4,8	.156	4,0	.106	2,7
.165	4,2	.187	4,8	2228	2229	GR 187	.047	1,2	.189	4,8	.187	4,8	.165	4,2
.188	4,8	.250	6,4	2230	2231	GR 250	.047	1,2	.189	4,8	.250	6,4	.187	4,8

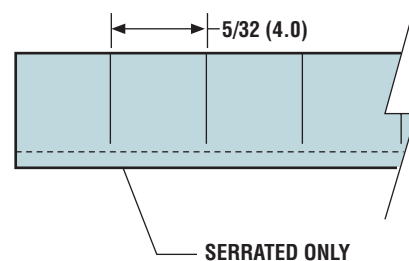

Quick Specs

Material Nylon
 Flammability Rating 94HB
 Temperature Range -20°F to 150°F