

FEATURES

- -55° to +100°C operation
- 160 to 400 VDC input
- Fully isolated
- Magnetic feedback
- Fixed frequency, 600 kHz typical
- Topology –
Two Switch, Single Ended Forward
- 450 V / 50 ms transient protection
- Inhibit input side and output side
- Sync in and out
- Indefinite short circuit protection
- Remote sense on single models
- Up to 85% efficiency
- Parallelable: up to 5 converters

DC/DC CONVERTERS 270 VOLT INPUT

MHP270 SERIES 65 WATT



MODELS	
VDC OUTPUT	
SINGLE	DUAL
5	±5
12	±12
15	±15
28	

Size (max.): 3.005 x 1.505 x 0.400 inches (76.33 x 38.23 x 10.16 mm)

See “Case U Maximum Dimensions” and “Case U.”

Weight: 86 grams maximum

Screening: MHP270 Standard or MHP270 ES.

See “QA Screening: MHP270” for more information

DESCRIPTION

The MHP270 Series™ DC/DC converters provide up to 65 watts of output power over the full -55°C to 100°C temperature range. MHP270 models operate from a MIL-STD-704 nominal 270 volt DC power bus – from 160 to 400 VDC continuous operation with surges to 450 volts – and provide isolated outputs at 5, 12, 15, and 28 VDC. Parallel operation for all loading conditions is supported without any requirement for external components.

MHP270 DC/DC converters are constant frequency, pulse width modulated switching power supplies which use a quasi-square wave, two-switch single-ended forward converter design. Tight load regulation is achieved through a wide-bandwidth magnetic feedback circuit.

Up to five single output MHP converters may be used in parallel to power a single load by simply connecting the share pins of all units. Units in this configuration have a 85% current sharing accuracy over all loading conditions.

MHP Series of converters feature a flexible synchronization scheme in which units may be synchronized to an external clock or to one another by using sync in and sync out pins provided on each unit. MHP converters have a nominal switching frequency of 600 kHz, but may be synchronized at any frequency from 525 to 675 kHz.

MHP converters meet a wide variety of military/aerospace performance and environmental specifications. Their continuous operation input voltage (160 to 400) meets the normal operating limits of MIL-STD-704. The unit shuts down above approximately 425 volts, but it is rated to withstand a surge of up to 450 volts for 50 msec. The units are built as fully hermetic thick film hybrids in Interpoint's MIL-STD-1772 certified facilities.

The MHP270 Series offer a complete list of standard features which include:

Undervoltage lock-out – shuts down when the input line voltage falls below approximately 120 VDC to provide smooth initialization.

Continuous short circuit protection – current limit set at approximately 125%.

Soft-start – controlled start-up at turn-on, release from inhibit, and recovery from load fault conditions.

Remote sense – to provide automatic compensation for voltage drops on output lines on single output models.

MHP270 SERIES

65 WATT

DC/DC CONVERTERS

ABSOLUTE MAXIMUM RATINGS

- Input Voltage**
- 160 to 400 VDC
- Output Power**
- 50 to 65 watts depending on model
- Lead Soldering Temperature (10 sec)**
- 300°C
- Storage Temperature Range (Case)**
- -65°C to +150°C

RECOMMENDED OPERATING CONDITIONS

- Input Voltage Range**
- 160 to 400 VDC continuous
 - 450 VDC for 50 msec transient
- Case Operating Temperature (Tc)**
- -55 to +100°C full power

SYNC AND INHIBIT (INH1, INH2)

- Sync In (525 to 675 kHz)**
- Duty cycle 40% min, 60% max
 - Logic low 0.8 V max
 - Logic high 4.5 V min
 - If not used, connect to input common
 - Referenced to input common
- Sync Out - Referenced to input common**
- Inhibit (INH1, INH2) TTL Open Collector**
- Logic low (output disabled)
 - INH1 referenced to input common
Logic low 0.8 V max
 - INH2 referenced to output common
Logic low 0.5 V max
 - Logic high (output enabled)
Open collector

PINS NOT IN USE

- | | |
|-----------------------------|--|
| Inhibit (INH1, INH2) | No connection |
| Sync Out | No connection |
| Sync In | Connect to input common |
| Share | Connect to output common |
| Sense Lines | Must be connected to appropriate outputs |

TYPICAL CHARACTERISTICS

- Output Voltage Temperature Coefficient**
- 100 ppm/°C typical
- Isolation**
- 100 megohm minimum at 500 V
- Conversion Frequency**
- Free run mode 600 kHz typical
525 kHz. min., 675 kHz max
 - External sync range: 525 to 675 kHz
- Inhibit Pin Voltage (unit enabled)**
- INH1 = 12 V typ., INH2 = 5 V typ
- Low Line Drop Out - Vout drops 50 mv**
- Input voltage 155 VDC max
- Undervoltage Lockout**
- Input voltage 110 VDC min
- Current Limit**
- 125% of full load typical

Electrical Characteristics: 25°C Tc, 270 VDC Vin, 100% load, free run, unless otherwise specified.

SINGLE OUTPUT MODELS		MHP27005S			MHP27012S			MHP27015S			MHP27028S			UNITS
PARAMETER	CONDITION	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE		4.95	5.00	5.05	11.88	12.00	12.12	14.85	15.00	15.15	27.22	28.00	28.28	VDC
OUTPUT CURRENT	V _{IN} = 160 TO 400 VDC	0	—	10	0	—	5	0	—	4.33	0	—	2.32	A
OUTPUT POWER	V _{IN} = 160 TO 400 VDC	0	—	50	0	—	60	0	—	65	0	—	65	W
OUTPUT RIPPLE VOLTAGE	10 kHz - 2 MHz	—	—	50	—	—	50	—	—	75	—	—	280	mV p-p
LINE REGULATION	V _{IN} = 160 TO 400 VDC	—	—	50	—	—	120	—	—	150	—	—	280	mV
LOAD REGULATION	NO LOAD TO FULL	—	—	50	—	—	120	—	—	150	—	—	280	mV
INPUT VOLTAGE	CONTINUOUS	160	270	400	160	270	400	160	270	400	160	270	400	VDC
	TRANSIENT ¹ 50 ms	—	—	450	—	—	450	—	—	450	—	—	450	V
INPUT CURRENT	NO LOAD	—	—	20	—	—	20	—	—	20	—	—	20	mA
	INHIBITED - INH1	—	—	8	—	—	10	—	—	7	—	—	10	mA
	INHIBITED - INH2	—	—	15	—	—	15	—	—	15	—	—	15	
INPUT RIPPLE CURRENT	10 kHz - 10 MHz	—	—	50	—	—	50	—	—	45	—	—	50	mA p-p
EFFICIENCY		76	—	—	81	—	—	80	—	—	80	—	—	%
LOAD FAULT ²	POWER DISSIPATION SHORT CIRCUIT	—	—	19	—	—	19	—	—	19	—	—	23	W
	V _{OUT}	—	—	1.5	—	—	1.5	—	—	1.0	—	—	1.0	VDC
STEP LOAD RESP.	50% - 100% - 50%													
	TRANSIENT	—	—	300	—	—	700	—	—	700	—	—	1800	mV pk
	RECOVERY ³	—	—	300	—	—	500	—	—	300	—	—	1000	μs

Notes

1. Unit will shut down above approximately 425V but will be undamaged and will restart when voltage drops into normal range.
2. Indefinite short circuit protection not guaranteed above 100°C case.
3. Recovery time is measured from application of the transient to point at which Vout is within 1% of final value.

DC/DC CONVERTERS


MHP270 SERIES 65 WATT

Electrical Characteristics: 25°C Tc, 270 VDC Vin, 100% load, free run, unless otherwise specified.

DUAL OUTPUT MODELS ¹		MHP27005D			MHP27012D			MHP27015D			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE	+V _{OUT}	4.95	5.00	5.05	11.88	12.00	12.12	14.85	15.00	15.15	VDC
	-V _{OUT}	4.95	5.00	5.05	11.88	12.00	12.12	14.85	15.00	15.15	
OUTPUT CURRENT ²	V _{IN} = 160 TO 400 VDC	0	±5	8.0	0	±2.5	4.0	0	±2.16	3.46	A
OUTPUT POWER ²	V _{IN} = 160 TO 400 VDC	0	—	50	0	—	60	0	—	65	W
OUTPUT RIPPLE VOLTAGE	10 kHz - 2 MHz ± V _{OUT}	—	50	100	—	50	125	—	50	125	mV p-p
LINE REGULATION	V _{IN} = 160 TO 400 VDC ± V _{OUT}	—	—	100	—	—	120	—	—	150	mV
LOAD REGULATION ³	NO LOAD TO FULL ± V _{OUT}	—	—	100	—	—	120	—	—	150	mV
CROSS REGULATION ⁴	EFFECT ON -V _{OUT}	—	—	1000	—	—	800	—	—	750	mV
INPUT VOLTAGE	CONTINUOUS	160	270	400	160	270	400	160	270	400	VDC
	TRANSIENT ⁵ 50 ms	0	—	450	0	—	450	0	—	450	V
INPUT CURRENT	NO LOAD	—	—	20	—	—	20	—	—	20	mA
	INHIBITED - INH1	—	—	10	—	—	10	—	—	8	mA
	INHIBITED - INH2	—	—	15	—	—	15	—	—	15	
INPUT RIPPLE CURRENT	10 kHz - 10 MHz	—	—	45	—	—	45	—	—	45	mA p-p
EFFICIENCY	BALANCED LOAD	74	—	—	81	—	—	82	—	—	%
LOAD FAULT ⁶	POWER DISSIPATION SHORT CIRCUIT	—	—	8	—	—	7.5	—	—	19	W
	V _{OUT}	—	—	±2.0	—	—	±1.0	—	—	±1.5	V
STEP LOAD RESPONSE ± V _{OUT}	50 %-100% LOAD ⁷ TRANSIENT	—	—	300	—	—	900	—	—	900	mV pk
	RECOVERY ⁸	—	—	500	—	—	500	—	—	500	μs




Notes

- Share operation not characterized for dual outputs.
- Up to 80% of the total output power (current) is available from either output providing the opposite output is carrying 20% of the power (current) in use.
- Assumes balanced loads on the outputs.
- Effect on the negative output from 50%/50% loads to 70%/30% or 70%/30% loads.
- Unit will shut down above approximately 425V but will be undamaged and will restart when voltage drops into normal range.
- Indefinite short circuit protection not guaranteed above 125°C case.
- Second output at 50%
- Recovery time is measured from application of the transient to point at which Vout is within 1% of final value.

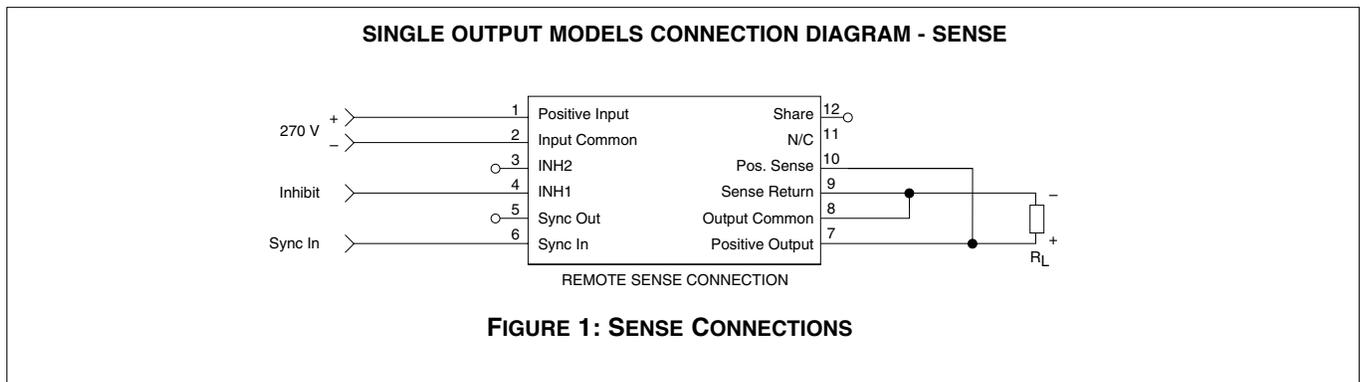

MHP270 SERIES 65 WATT

DC/DC CONVERTERS

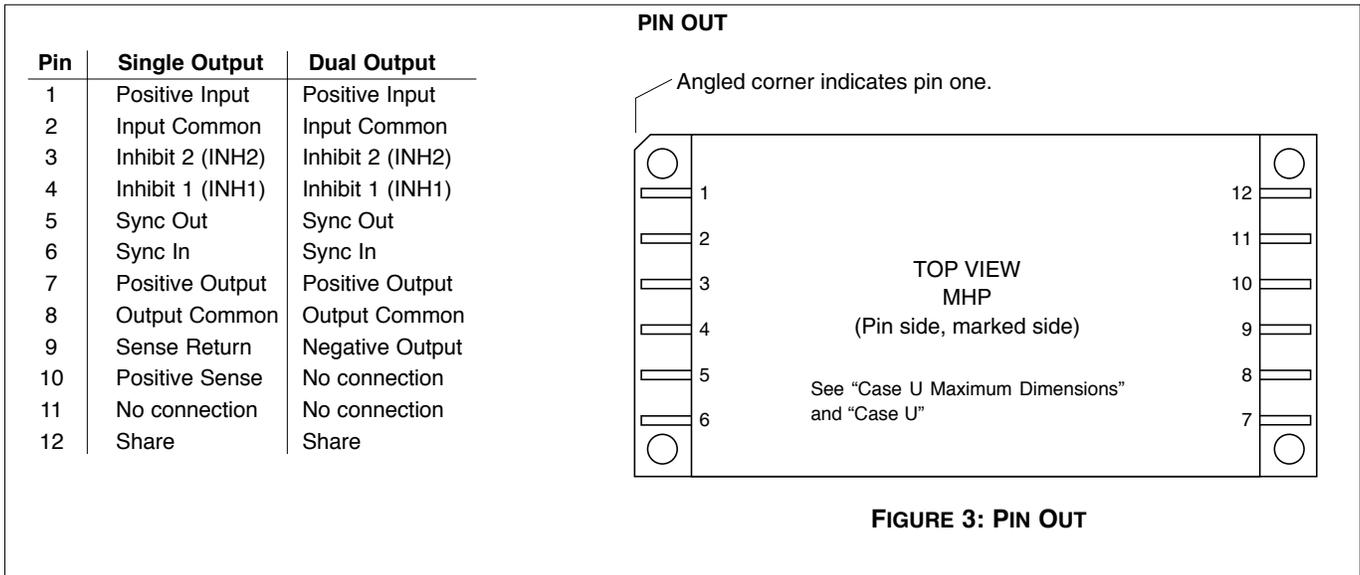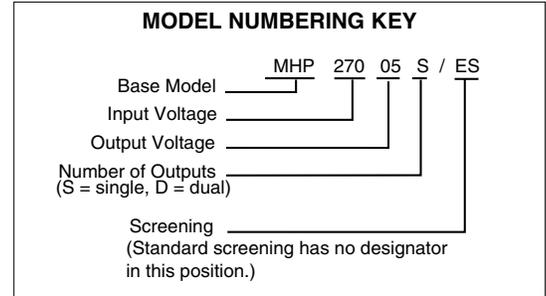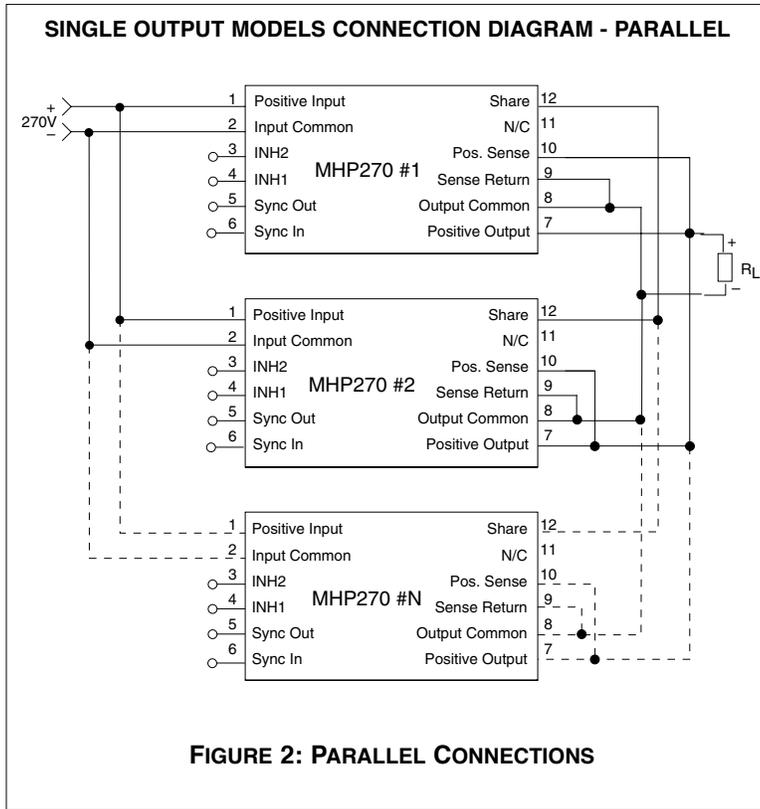


MHP270 Rev D This revision supercedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors or omissions. Interpoint reserves the right to make changes in products or specifications without notice. MHP270 Series is a trademark of Interpoint. Copyright © 1994 - 2005 Interpoint Corporation. All rights reserved.



CASES

CASE U MAXIMUM DIMENSIONS TOP VIEW (PIN SIDE)

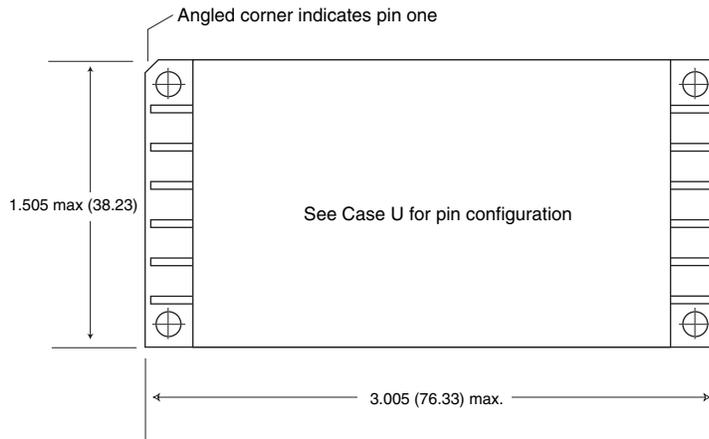

Note: Pins are shown for Case U1.

Materials

Header Cold Rolled Steel/Nickel/Gold
Cover Kovar/Nickel
Pins #52 alloy/Gold
compression glass seal

Case dimensions in inches (mm)

Tolerance ± 0.005 (0.13) for three decimal places
 ± 0.01 (0.2) for two decimal places
unless otherwise specified

CAUTION

Heat from reflow or wave soldering may damage the device.
Solder pins individually with heat application not exceeding 300°C for 10 seconds per pin


Case U maximum dimensions, Rev B, September 27 2005

Please refer to the numerical dimensions for accuracy. All information is believed to be accurate, but no responsibility is assumed for errors or omissions. Interpoint reserves the right to make changes in products or specifications without notice.
Copyright © 1999-2005 Interpoint Corp. All rights reserved.

CASES

TOP VIEW CASE U

MOR Series, MFL Series, MHP Series, MFLHP Series,
FMTR Series, SMFL Series, SMFLHP Series, SMHP Series,
FME EMI Filter, FMD270 EMI Filter, SFCS EMI Filter,
SFME EMI Filter, HUM70 Module, and LCM Module

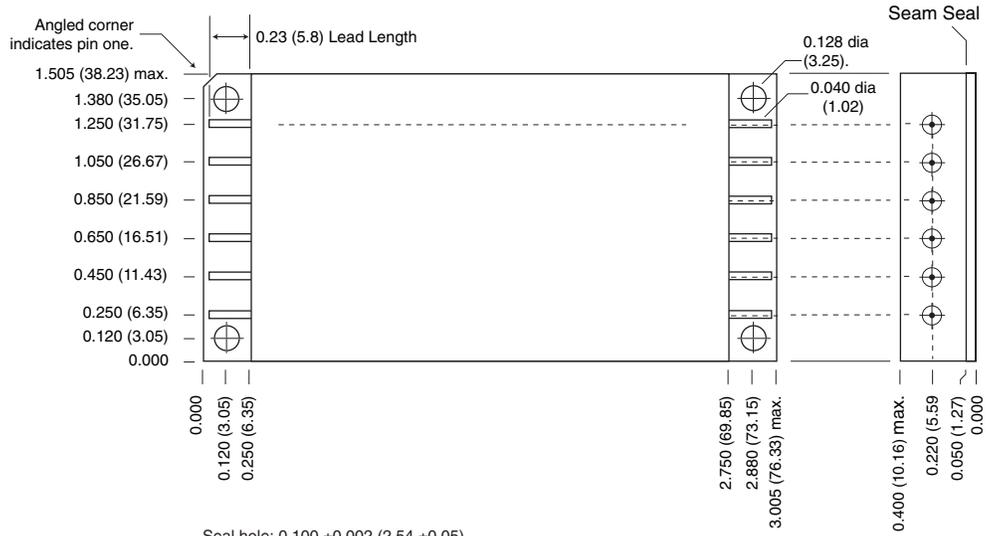

Case dimensions in inches (mm)

Tolerance ±0.005 (0.13) for three decimal places
±0.01 (0.3) for two decimal places
unless otherwise specified

CAUTION

Heat from reflow or wave soldering may damage the device.
Solder pins individually with heat application not exceeding 300°C for 10 seconds per pin

Case U, Rev B, September 27, 2005

Please refer to the numerical dimensions for accuracy. All information is believed to be accurate, but no responsibility is assumed for errors or omissions. Interpoint reserves the right to make changes in products or specifications without notice.

Copyright © 1999-2005 Interpoint Corp. All rights reserved.

QA SCREENING: MHP270 (STANDARD & ES)

MHP270 SCREENING (STANDARD & ES)

TEST	MHP270 STANDARD	MHP270 /ES
Pre-cap Inspection Method 2017, 2032	yes	yes
Temperature Cycle (10 times) Method 1010, Cond. B, -55°C to 125°C, ambient	no	yes
Constant Acceleration Method 2001, 500 g	no	yes
Burn-In 96 hours at 100°C case, typical	no	yes
Final Electrical Test MIL-PRF-38534, Group A Subgroups 1 and 4: +25°C case	yes	yes
Hermeticity Test Fine Leak, Method 1014, Cond. A Gross Leak, Method 1014, Cond. C Gross Leak, Dip (1 x 10 ⁻³)	no no yes	yes yes no
Final Visual Inspection Method 2009	yes	yes

Test methods are referenced to MIL-STD-883 as determined by MIL-PRF-38534.