
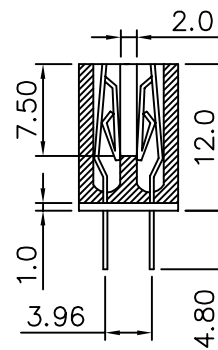
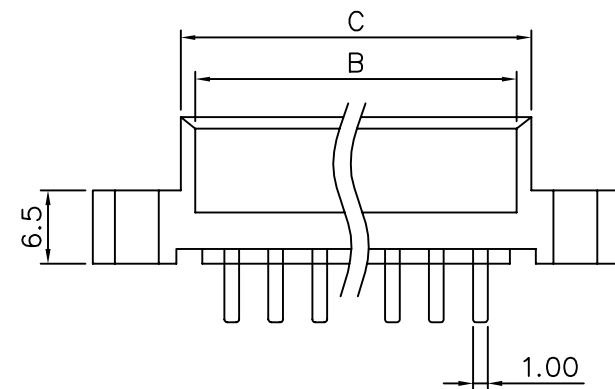


# SPECIFICATIONS

Current Rating : 3A 1600V AC  
 Contact Resistance : 10 Milliohms Max.  
 Insulation Resistance : 1000 Megohms 500V DC/1 Minute  
 Operation Temperature : -55°C To +120°C  
 Operation Relative : Humidity 5 To 95% R.H.  
 Housing : Glass Fiber UL 94V-0 Reinforce Polyester  
 Contact : Phosphor Bronze Or Brass

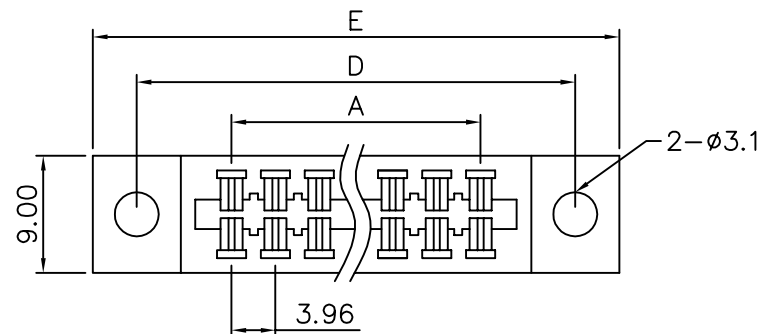

| Contacts | A      | B      | C      | D      | E      |
|----------|--------|--------|--------|--------|--------|
| 10       | 15.84  | 24.06  | 27.40  | 34.94  | 41.20  |
| 12       | 19.80  | 28.02  | 31.36  | 38.90  | 45.16  |
| 16       | 27.72  | 35.94  | 39.28  | 46.82  | 53.08  |
| 20       | 35.64  | 43.86  | 47.20  | 54.74  | 61.00  |
| 24       | 43.56  | 51.78  | 55.12  | 62.66  | 68.92  |
| 30       | 55.44  | 63.66  | 67.00  | 74.54  | 80.80  |
| 36       | 67.32  | 75.54  | 78.88  | 86.42  | 92.68  |
| 40       | 75.24  | 83.46  | 86.80  | 94.34  | 100.60 |
| 44       | 83.16  | 91.38  | 94.72  | 102.26 | 108.52 |
| 48       | 91.08  | 99.30  | 102.26 | 110.18 | 116.44 |
| 56       | 106.92 | 115.14 | 118.48 | 126.02 | 132.28 |
| 60       | 114.84 | 123.06 | 126.40 | 133.94 | 140.20 |
| 72       | 138.60 | 146.82 | 150.16 | 157.77 | 163.96 |
| 86       | 166.32 | 174.54 | 177.88 | 185.49 | 191.48 |