
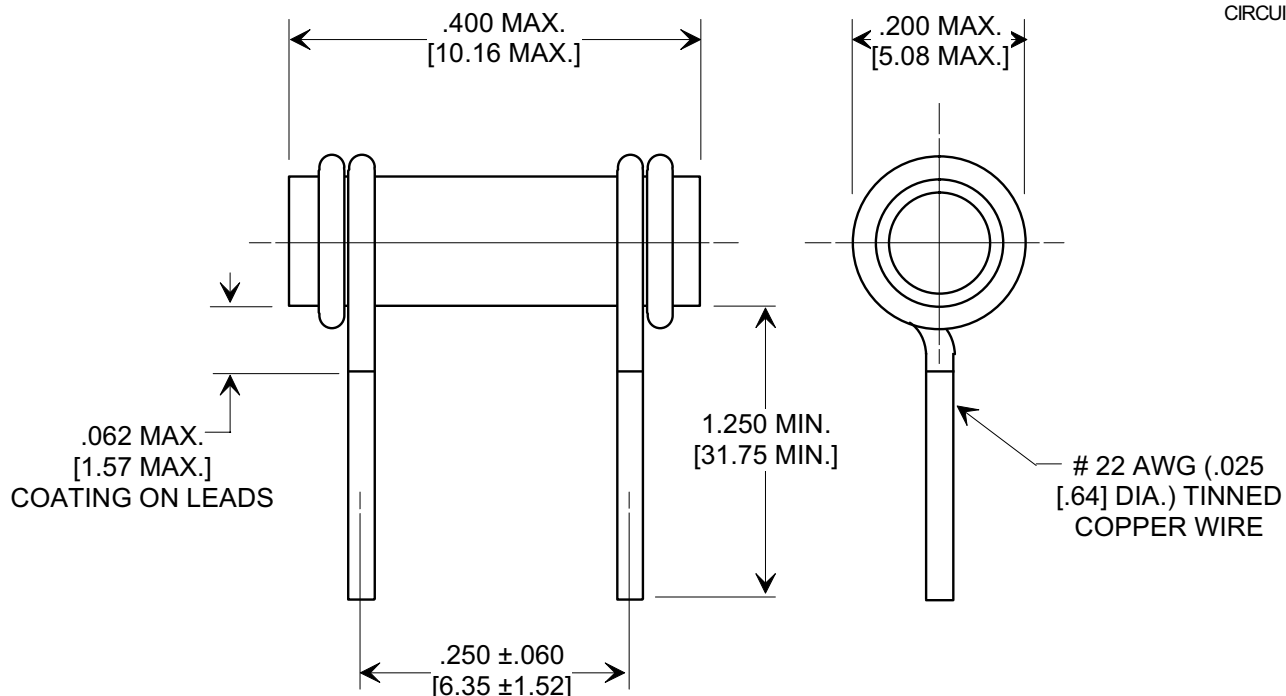



Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN INCHES - [ ]**



**SPECIFICATIONS**

|                  |          |                     |
|------------------|----------|---------------------|
| Tusonix Style:   |          | 301-611             |
| Value:           |          | 8 pF                |
| Value Tol.:      |          | ±.25 pF             |
| Temp. Coef.:     |          | COH                 |
| Operating Range: |          | -55°C TO 85°C       |
| Voltage          | Working: | 500 VDC             |
|                  | Test:    | 1500 VDC            |
|                  | Life:    | 1000 VDC            |
| Marking:         |          | STANDARD COLOR CODE |

NOTE:  
INSPECTED TO MIL-PRF-20  
GROUP A, NON-ER.

|                                                                  |   |  |                                              |  |                                                      |  |
|------------------------------------------------------------------|---|--|----------------------------------------------|--|------------------------------------------------------|--|
| <b>REVISION RECORD</b><br>Original Release<br>C.O. 20030724-1-02 | 0 |  | --TOLERANCES--<br>Unless Otherwise Specified |  | Title<br><b>LACQUER COATED<br/>TUBULAR CAPACITOR</b> |  |
|                                                                  |   |  | DECIMAL ±                                    |  | Drawn L.E. 07-28-03 Scale 5X                         |  |
|                                                                  |   |  | ANGLES ±                                     |  | Approved T.C. 07-28-03                               |  |
|                                                                  |   |  | <b>TUSONIX</b><br>TUCSON, ARIZONA            |  | <b>A</b> 301-611-C0H0-809C                           |  |