

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0520430719](#)
Status: **Active**
Overview:
Description: 1.00mm (.039") Pitch FFC/FPC Connector, Through-Hole, Right Angle, ZIF, Bottom Contact Style Receptacle, 7 Circuits, Lead-free

Agency Certification

CSA LR19980
UL E29179

General

Product Family FFC/FPC Connectors
Series 52043
Overview ffc_fpc_throughhole
Product Name N/A

Physical

Circuits (Loaded) 7
Contact Position Bottom
Durability (mating cycles max) 30
Entry Angle 90° Angle
Flammability 94V-0
Mated Height (in) 0.165 In
Mated Height (mm) 4.20 mm
Material - Metal Phosphor Bronze
Material - Plating Mating Tin-Bismuth
Material - Plating Termination Tin-Bismuth
Material - Resin Nylon, Polyester
Number of Rows 1
Orientation Right Angle
PC Tail Length (in) 0.126 In
PC Tail Length (mm) 3.20 mm
PCB Retention Yes
PCB Thickness Recommended (in) 0.063 In
PCB Thickness Recommended (mm) 1.60 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.039 In
Pitch - Mating Interface (mm) 1.00 mm
Polarized to PCB No
Stackable No
Temperature Range - Operating -20°C to +80°C
Termination Interface: Style Through Hole
Wire/Cable Type FFC/FPC

Electrical

Current - Maximum per Contact 0.5A
Voltage - Maximum 50V

Material Info

Reference - Drawing Numbers

Packaging Specification SPK-52043
Product Specification PS-52043-005, RPS-52043-005, RPS-52043-006
Sales Drawing SD-52043-002

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[52043Series](#)

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

8

7

6


5

4

3



2

1

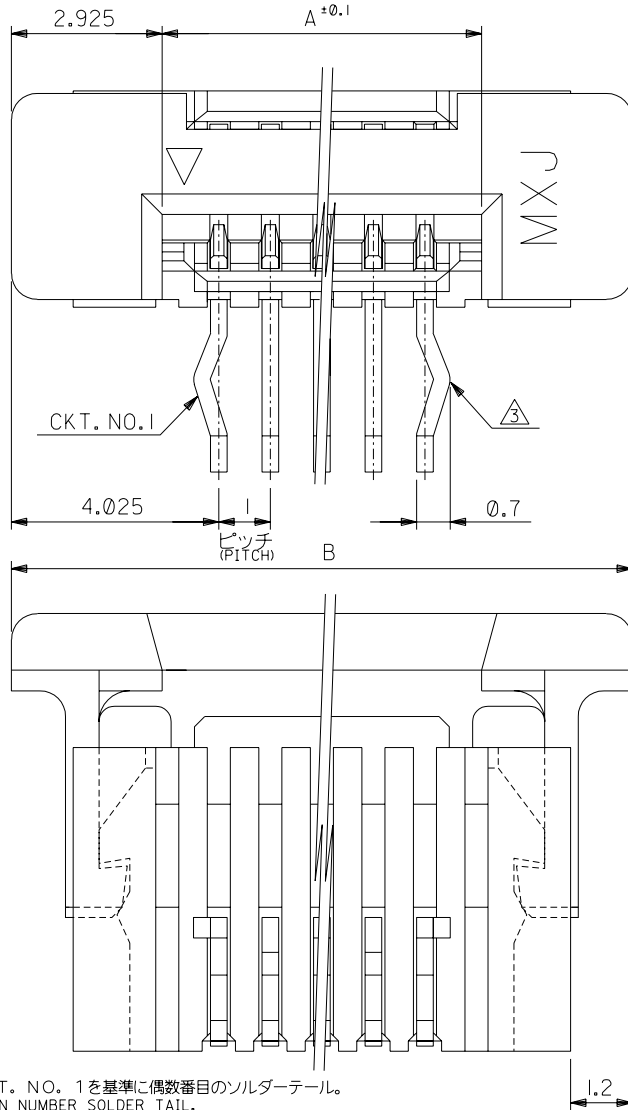

注記:
NOTES:

- △ CKT. NO. 1を基準に偶数番目のソルダーテール。
EVEN NUMBER SOLDER TAIL.
- △ CKT. NO. 1を基準に奇数番目のソルダーテール。
ODD NUMBER SOLDER TAIL.
- △ ソルダーテールキックは、△のソルダーテールの両端部に設ける。
KICK TO BE APPLIED FOR THE BOTH END OF ODD NUMBER SOLDER TAIL
4. 材 料: ターミナル: リン青銅、ニッケル下地 銅ビスマスマスッキ (t=0.32)
MATERIAL: TERMINAL: PHOSPHOR BRONZE, TIN-BISMUTH OVER NICKEL PLATING (t=0.32)
ハウジング: 66ナイロン, UL94V-0
HOUSING: 66NYLON, UL94V-0
アクチュエーター: ポリエステル, UL94V-0
ACTUATOR: POLYESTER, UL94V-0
5. 本製品は 52043-**-10 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 52043-**-10.

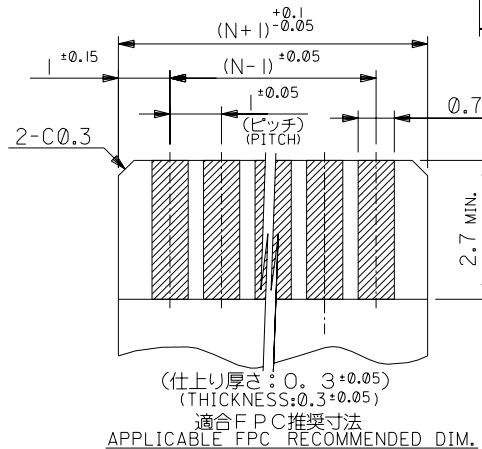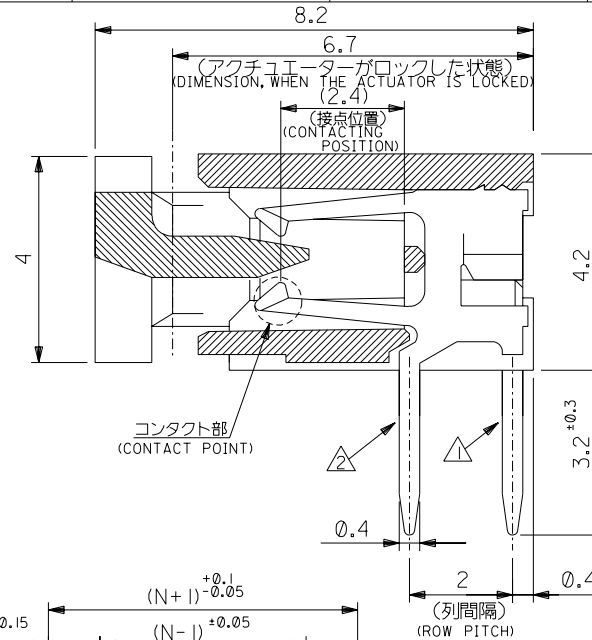


FPCについて:
打抜き方向は導体側から補強板を推奨致します。補強フィルム材質はポリイミドを推奨致します。
接着剤は熱硬化接着剤を推奨致します。

ABOUT FPC:
RECOMMENDED PUNCHER DIRECTION : FROM CONDUCTOR SIDE TO STIFFENER BOARD SIDE.
RECOMMENDED MATERIAL :
STIFFENER FILM : POLYIMIDE
BONDING AGENT :
THERMOSETTING BONDING AGENT

角度 ANGLE	±3°
30°以上 OVER	±0.3
10°以上 30°未満 OVER	±0.25
10°未満 UNDER	±0.2
一般公差 GENERAL TOLERANCES	

材料 MATERIAL	注記参照 SEE NOTES
仕上げ FINISH	—/—
適用電線範囲 WIRE RANGE	—/—
被覆外径 INS. RANGE	—/—
DRAWN BY '04/05/19 Y.WADA	CHK'D BY '04/05/19 M.SASAO
APP'D BY '04/05/19 M.SASAO	尺 度 SCALE 10:1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX(JAPAN) AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
本図面は日本モレックス(株)の所有する情報を含むもので 当社の許可なく複製を禁止する。 EN-01C(032)MXJ-32

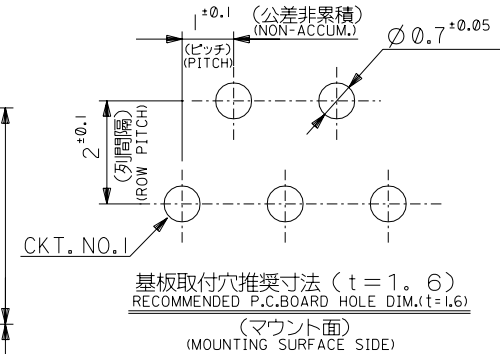

27.05	21.2	52043-2019	20
26.05	20.2	-1919	19
25.05	19.2	-1819	18
24.05	18.2	-1719	17
23.05	17.2	-1619	16
22.05	16.2	-1519	15
21.05	15.2	-1419	14
20.05	14.2	-1319	13
19.05	13.2	-1219	12
18.05	12.2	-1119	11
17.05	11.2	-1019	10
16.05	10.2	-0919	9
15.05	9.2	-0819	8
14.05	8.2	-0719	7
13.05	7.2	-0619	6
12.05	6.2	-0519	5
11.05	5.2	-0419	4
10.05	4.2	52043-0319	3
B	A	MATERIAL NO.	極 数 CKT.

MODEL NO. 52043-**-19

MOLEX-JAPAN CO.,LTD.
日本モレックス株式会社

REVISE ONLY ON CAD SYSTEM

TITLE 名称

I.0 FPC CONN. Z.I.F. R/A
-LEAD FREE-

DWG. NO. SD-52043-002 REV 0

8

7

6

5

4

3

2

1