

# Arbitrary Waveform Generator

▶ AWG710B




## The AWG710B Arbitrary Waveform Generator Delivers World-class Signal Fidelity at 4.2 GS/s to Solve Ever-increasing Measurement Challenges


The AWG710B Arbitrary Waveform Generator Delivers World-class Signal Fidelity at 4.2 GS/s to Solve Ever-increasing Measurement Challenges. New two box synchronous operation function supports 2 ch 4.2 GS/s solution.

The AWG710B combines world-class signal fidelity with ultra high-speed mixed signal simulation, a powerful sequencing capability and graphical user interface with flexible waveform editor, to solve the toughest measurement challenges in the disk drive, communications and semiconductor design/test industries.

The built-in signal applications enable you to easily create standard waveforms for disk drive read channels, communications up to 4.2 Gb/s such as ITU-T, T1.102, Fibre Channel and SDH/SONET also various semiconductor applications.

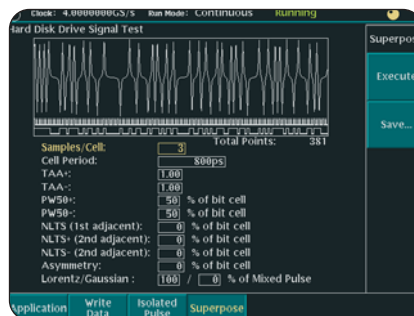

▶ Disk drive read channel application.

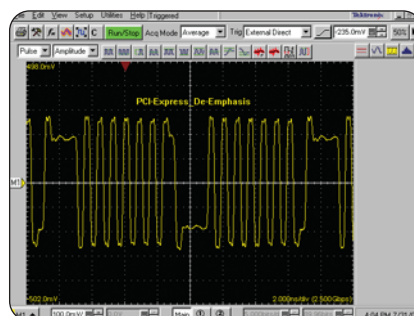

▶ 2.5 Gbps PCI express de-emphasis signal.

## ▶ Features & Benefits

4.2 GS/s Sample Rate  
Simulates Real-world Signals  
Up To 2.1 GHz

2 Markers With 2.0 ps<sub>RMS</sub>  
(at 4.2 GS/s, Typical) Jitter  
Deliver Stable Timing to the  
Device-Under-Test (DUT)

32.4M (32,400,000) or  
64.8M (64,800,000) Point  
Record Length Provide  
Longer Data Streams

Analog Bandwidth to 2 GHz  
(Option O2, Calculated Based  
on Rise Time) Provides the  
Highest Signal Fidelity of All  
High-speed AWGs

Direct External Clock Input  
Allows Jittered and Non-jit-  
tered Signals for High-speed  
Data Stream Timing Margin  
Test Up to 4.2 Gb/s

Synchronous Operation  
Mode Supports Two  
AWG710B Outputs (2: Analog,  
4: Marker) Synchronization for  
High Data Rate Wireless and  
Data Communication Test  
and Optical Write Channel  
Strategy Signal Test

Waveform Quick Editor  
with 300 fs Edge Timing  
Resolution Delivers Output  
Edge Control with Near  
Real-time Precision

Allows Two-signal Mix  
Function Digitally to  
Support Disk Drive Noise  
Performance Test and  
Pre/De-emphasis Serial  
Data Communication Test

Real-time Sequencing  
Creates Infinite Waveform  
Loops, Jumps, Patterns  
and Conditional Branches

## ▶ Applications

Disk Drive Read/Write  
Design and Test

Communications Design  
and Test

Arbitrary IF and IQ  
Base-band Signals

Standard Waveforms  
for Communications

Pulse Generation

High-speed, Low-jitter  
Data and Clock Source

Mixed Signal Design and Test

Real-world Simulations

Corruption and Enhancement  
of Ideal Waveforms

Timing and Amplitude Signal  
Impairments

Waveforms Imported from  
MathCad, MATLAB, Excel  
and Others

COMPUTING

COMMUNICATIONS

VIDEO

# Arbitrary Waveform Generator

▶ AWG710B

## ▶ Characteristics

### Arbitrary Waveforms

**Waveform Length** – 960 to 32,400,000 points (or 64,800,000 points, Option 01) in multiples of four.

**Sequence Length** – 1 to 8,000 steps.

**Sequence Repeat Counter** – 1 to 65,536 or infinite.

### Run Modes

Gated mode, Event Jump, and Software Jump are disabled in the synchronous operation.

**Continuous** – Waveform is iteratively output. If a sequence is defined, the sequence order and repeat functions are applied.

**Triggered** – Waveform is output only once when an external, internal, GPIB, LAN, or manual trigger is received.

**Gated** – Waveform begins output when gate is true and resets to beginning when false.

**Enhanced** – Waveform is output as defined by the sequence.

## Extended Operation

### Function Generator

**Waveform Shape** – Sine, Triangle, Square, Ramp, Pulse, or DC.

**Frequency** – 1.000 Hz to 400.0 MHz.

### Amplitude

Range: 0.020  $V_{p-p}$  to 2  $V_{p-p}$  into 50  $\Omega$ .  
Resolution: 1 mV.

### Offset

Range: -0.500 V to +0.500 V into 50  $\Omega$ .  
Resolution: 1 mV.

### DC Level

DC waveform only.  
Range: -0.500 V to +0.500 V into 50  $\Omega$ .  
Resolution: 1 mV.

**Polarity** – Normal, Invert.

### Duty Cycle

Range: 0.1% to 99.9%, Pulse waveform only.  
Resolution:

- 1.000 Hz to 4.000 MHz: 0.1% step.
- 4.001 MHz to 20.00 MHz: 0.5% step.
- 20.01 MHz to 40.00 MHz: 1% step.
- 40.01 MHz to 80.00 MHz: 2% step.
- 80.01 MHz to 100.0 MHz: 2.5% step.
- 100.1 MHz to 160.00 MHz: 4% step.
- 160.1 MHz to 200.0 MHz: 5% step.
- 200.1 MHz to 400.0 MHz: 10% step.

### Marker Out

Marker1 Pulse Width:

Hi Lo: 20%/80% of Period.

Marker2 Pulse Width:

Hi/Lo: 50%/50% of Period, except 100.1 MHz to 160.0 MHz.  
Hi/Lo: 52%/48% of Period, at 100.1 MHz to 160.0 MHz.

Marker Level:

Hi Level: 1 V into 50  $\Omega$ .  
Lo Level: 0 V into 50  $\Omega$ .

**Waveform Mixing Operation** – Supports two-signals mixed output digitally.

**Synchronous Operation** – Supports to synchronize two AWG710B signals output by two boxes.

**NOTE:** This operation is executed by Sync master and Sync slave operation combination.

**Sync Master Operation** – Set one AWG710B as a master box.

**Sync Slave Operation** – Set another AWG710B as a slave box.

### Clock Generator

**Sampling Frequency** – 50.000000 kS/s to 4.2000000 GS/s.

**Resolution** – 8 digits.

**Internal Clock** – Accuracy:  $\pm 1$  ppm.

**Phase Noise** – (VCO unit)

At 4.2 GS/s, 10 kHz offset: -65 dBc/Hz.  
At 4.2 GS/s, 100 kHz offset: -96 dBc/Hz.

### Internal Trigger Generator

**Internal Trigger Rate** –

Range: 1.0  $\mu$ s to 10.0 s.  
Resolution: 3 digits, 0.1  $\mu$ s minimum.  
Accuracy:  $\pm 0.1\%$ .

### Main Output

**Output Signal** – Complementary; CH1 and channel inverse.

### Digital to Analog Converter

Resolution: 8-bits.  
Differential Non-linearity:  $\pm 1/2$ -LSB.  
Integral Non-linearity:  $\pm 1$ -LSB.

**Output Connector** – Front Panel SMA.

### Normal Out\*1

**Amplitude** –

Output Voltage: -1.5 V to +1.5 V into 50  $\Omega$ .  
Amplitude: 20 mV to 2.0 V into 50  $\Omega$ .  
Resolution: 1 mV.  
DC Accuracy:  $\pm(2.0\%$  of Amplitude + 2 mV) at offset = 0 V.

### Offset

Range: -0.500 V to +0.500 V into 50  $\Omega$ .  
Resolution: 1 mV.  
Accuracy:  $\pm 1.5\%$  of offset  $\pm 10$  mV at 20 mV amplitude.

**Pulse Response** – (-1 and 1 waveform data, 0 V offset, through filter at 1  $V_{p-p}$ , clock 1 GS/s) using 20 GHz BW oscilloscope.  
Rise Time: (10 to 90%):  $\leq 480$  ps.  
Fall Time: (10 to 90%):  $\leq 480$  ps.  
Aberrations:  $\pm 10\%$  (at 1.0  $V_{p-p}$  amplitude).  
Flatness:  $\pm 5\%$  (after 20 ns from rise/fall edge).

### Sine Wave Characteristics

(4.2 GS/s clock, 32 waveform points, 131.25 MHz signal frequency, 1.0 V amplitude, 0 V offset, through filter.)  
Harmonics:  $\leq -40$  dBc, DC to 1000 MHz.  
Noise:  $\leq -50$  dBc, DC to 1000 MHz.  
Phase Noise:  $\leq -85$  dBc/Hz at 10 kHz offset.

### Filter\*1

**Type** – 20, 50, 100, 200 MHz Bessel low-pass.

**Rise Time (10% to 90%)** – 20 MHz, 17 ns;  
50 MHz, 7.0 ns; 100 MHz, 3.7 ns; 200 MHz, 2.0 ns.

**Group Delay** – 20 MHz, 18 ns; 50 MHz, 8 ns;  
100 MHz, 4.7 ns; 200 MHz, 3 ns.

### Direct D/A Out\*1

**Amplitude** – 20 mV $_{p-p}$  to 1.0 V $_{p-p}$  into 50  $\Omega$ .

**Resolution** – 1 mV.

**DC Accuracy** –  $\pm(2\%$  of Amplitude + 2 mV).

**Offset** – no function.

**DC Offset Accuracy** – 0 V  $\pm 10$  mV at 20 mV amplitude (waveform data = 0).

**Pulse Response (-1 and 1 waveform data, at 0.5 V $_{p-p}$ )** –

Rise Time (10% to 90%):  $\leq 280$  ps.  
Fall Time (10% to 90%):  $\leq 280$  ps.

**Output Impedance** – 50  $\Omega$ .

### Extended Bandwidth Output (Option 02)

**Amplitude** – 500 mV $_{p-p}$  to 1.0 V $_{p-p}$  into 50  $\Omega$

**Resolution** – 1 mV.

**DC Accuracy** –  $\pm(2.0\%$  of amplitude + 2 mV).

**Offset** – No function.

**DC Offset Accuracy** – 0 V  $\pm 10$  mV at 500 mV Amplitude (waveform data = 0).

**Pulse Response** – (-1 and 1 waveform data, at 1.0 V $_{p-p}$ ).

**Rise Time** – (10% to 90%):  $\leq 175$  ps.

**Fall Time** – (10% to 90%):  $\leq 175$  ps.

**Output Impedance** – 50  $\Omega$ .

## Auxiliary Outputs

### Marker

**Number** – 2 (complementary).

### Level

High Level: -1.00 V to 2.45 V into 50  $\Omega$  to GND.  
Low Level: -2.00 V to 2.40 V into 50  $\Omega$  to GND.  
Amplitude: 0.05 V $_{p-p}$  to 1.25 V $_{p-p}$  max. into 50  $\Omega$  to GND.

\*1 Option 02 eliminates the ability to switch between normal and direct D/A out, as well as filter and offset control.

**Resolution** – 0.05 V.

**DC Accuracy** –

Within  $\pm 0.1\text{ V} \pm 5\%$  of setting into  $50\ \Omega$ .  
Maximum Output Current:  $\pm 80\text{ mA}$ .

**Rise/Fall Time (20% to 80%)** –  $< 130\text{ ps}$  into  $50\ \Omega$  to GND ( $1.0\text{ V}_{\text{p-p}}$ , Hi +1.0 V, Lo 0 V).

**Period Jitter (Typical)** – by1010 clock pattern.

At 4.2 GS/s  $2.0\text{ ps}_{\text{RMS}}$ , 15 ps peak to peak.

At 2.1 GS/s  $2.0\text{ ps}_{\text{RMS}}$ , 15 ps peak to peak.

At 1.05 GS/s  $2.0\text{ ps}_{\text{RMS}}$ , 15 ps peak to peak.

**Cycle-to-Cycle Jitter (Typical)** – by1010 clock pattern.

At 4.2 GS/s  $3.4\text{ ps}_{\text{RMS}}$ , 25 ps peak to peak.

At 2.1 GS/s  $3.4\text{ ps}_{\text{RMS}}$ , 25 ps peak to peak.

At 1.05 GS/s  $3.7\text{ ps}_{\text{RMS}}$ , 26 ps peak to peak.

**Marker Skew** –  $< 20\text{ ps}$  (typical).

**Delay (Between analog output and marker output)** –

(Marker Level:  $1\text{ V}_{\text{p-p}}$  (Hi + 1V/Lo 0 V), Analog

Output: At  $1\text{ V}_{\text{p-p}}$ .)

Normal Output:  $2.4\text{ ns}$  (Offset 0 V, Filter = “Through.”)

Direct Output:  $-1\text{ ns}$ .

**Connector** – Front-panel SMA.

**VCO Out**

**Amplitude** –

CML, AC coupling,  $0.4\text{ V}_{\text{p-p}}$  into  $50\ \Omega$  to GND.

Impedance:  $50\ \Omega$ , AC coupling.

**Connector** – Rear-panel SMA.

**10 MHz Reference Clock Out**

**Amplitude** –  $1.2\text{ V}_{\text{p-p}}$  into  $50\ \Omega$ . Max  $2.5\text{ V}_{\text{p-p}}$  open.

**Impedance** –  $50\ \Omega$ , AC coupling.

**Connector** – Rear-panel BNC.

**C Out 1 and 2**

For 2 boxes synchronous usage.

Connector: SMA, Rear.

Output Signal Style: Complementary.

**T Out 1 and 2**

For 2 boxes synchronous usage.

Connector: SMA, Rear.

Output Signal Style: Complementary.

**Auxiliary Inputs**

**Trigger In**

**Trigger Mode** – Minimum Pulse Width:  $10\text{ ns}$ ,  $0.2\text{ V}$  amplitude.

**Impedance** –  $1\text{ k}\Omega$  or  $50\ \Omega$ .

**Polarity** – POS or NEG.

**Connector** – Rear-panel BNC.

**Input Voltage Range** –

$1\text{ k}\Omega$ :  $\pm 10\text{ V}$ .

$50\ \Omega$ :  $\pm 5\text{ V}$ .

**Threshold** –

Level:  $-5.0\text{ V}$  to  $5.0\text{ V}$ .

Resolution:  $0.1\text{ V}$ .

**Trigger Mode** – Minimum Pulse Width:  $10\text{ ns}$ ,  $0.2\text{ V}$  amplitude.

**Trigger Hold-off** –

One Box Operation:  $\leq 109.5\text{ clocks} + 500\text{ ns}$ .

Two Boxes Synchronous Operation:  $\leq 109.5\text{ clocks} + 700\text{ ns}$ .

Delay to Analog Out:  $275.5\text{ clocks} + 17\text{ ns}$  (Normal Output, Filter “Through”).

**Gate Mode** – (for one box operation).

Minimum Pulse Width ( $0.2\text{ V}$  amplitude):

$1152\text{ clocks} + 10\text{ ns}$ .

Gate Hold Off:  $\leq 1920\text{ clocks} + 20\text{ ns}$ .

Delay to Analog Out:  $1355\text{ to }1563.5\text{ clocks} + 9\text{ ns}$

(Normal Output, Filter “Through”).

**Event Input** – (for one box operation).

Number of Events: 7-bits.

Input Signals: 7 event bits, strobe.

Threshold: TTL level.

Maximum Input:  $0\text{ V}$  to  $+5\text{ V}$  (DC + peak AC).

Impedance  $1\text{ k}\Omega$ , pull-up to  $+3.3\text{ V}$ .

Connector: Rear-panel 9-Pin D-sub.

**Enhanced Mode** –

Minimum Pulse Width:  $320\text{ clocks} + 10\text{ ns}$ .

Event Hold Off:  $\leq 896\text{ clocks} + 20\text{ ns}$ .

Delay to Analog Out (Jump timing: Async, Output

Norm, Filter Through):

Strobe: ON,  $1691.5\text{ clocks} + 10\text{ ns}$ .

Strobe: OFF,  $1947.5\text{ clocks} + 6\text{ ns}$ .

Event Input to Strobe Input:

Setup Time:  $192\text{ clocks} + 10\text{ ns}$ .

Hold Time:  $192\text{ clocks} + 10\text{ ns}$ .

**External Clock IN**

**Input Voltage Range** –  $0.4\text{ V}_{\text{p-p}}$  to  $2.0\text{ V}_{\text{p-p}}$ .

**Impedance** –  $50\ \Omega$ , AC coupled.

**Frequency Range** –  $125\text{ MHz}$  to  $4.2\text{ GHz}$

**Note:** Need  $> 10\text{ mV/ns}$  signal slew rate.

**Connector** – Rear-panel SMA.

**Reference 10 MHz Clock IN**

**Input Voltage Range** –  $0.2\text{ V}_{\text{p-p}}$  to  $3.0\text{ V}_{\text{p-p}}$ ,  $\pm 10\text{ V}$  maximum.

**Impedance** –  $50\ \Omega$ , AC coupled.

**Frequency Range** –  $10\text{ MHz} \pm 0.1\text{ MHz}$ .

**Connector** – Rear-panel BNC.

**C IN**

For 2 boxes synchronous usage.

Connector: SMA, Rear.

Input Signal Style: Complementary.

**T IN**

For 2 boxes synchronous usage.

Connector: SMA, Rear.

Input Signal Style: Complementary.

**General Characteristics**

**Display** – Color TFT LCD.

**Display Area** – Horizontal:  $13.06\text{ cm}$  (5.14 in.),

Vertical:  $9.70\text{ cm}$  (3.81 in.).

**Resolution** –  $640 \times 480$ .

**Data Storage**

**Internal Hard Disk** –  $\geq 20.0\text{ GB}$ .

**Flash Disk** –  $256\text{ MB}$  (Option 10).

**Floppy Disk** –  $3.5\text{ inch}$ ,  $1.44\text{ MB}$ .

**Environment**

**Temperature** –

Operating:  $10\text{ }^\circ\text{C}$  to  $+40\text{ }^\circ\text{C}$ .

Nonoperating:  $-20\text{ }^\circ\text{C}$  to  $+60\text{ }^\circ\text{C}$ .

**Humidity** –

Operating:  $20\%$  to  $80\%$ .

Nonoperating:  $5\%$  to  $90\%$ .

**Altitude (Hard Disk Restriction)** –

Operating: Up to  $3,000\text{ m}$  ( $10,000\text{ ft}$ ).

Nonoperating: up to  $12,000\text{ m}$  ( $40,000\text{ ft}$ ).

**Random Vibration** –

Operating:  $2.65\text{ m/s}^2_{\text{RMS}}$  ( $0.27\text{ G}_{\text{RMS}}$ ,  $5\text{ Hz}$  to  $500\text{ Hz}$ ,  $10\text{ minutes}$ ).

Nonoperating:  $22.36\text{ m/s}^2_{\text{RMS}}$  ( $2.28\text{ G}_{\text{RMS}}$ ,  $5\text{ Hz}$  to  $500\text{ Hz}$ ,  $10\text{ minutes}$ ).

**Shock** – Nonoperating:  $294\text{ m/s}^2$  ( $30\text{ G}$ ), half-sine,

$11\text{ ms}$  duration (three times each axis, in each

direction,  $18\text{ total}$ ).

**EMC Compliance** – EC Council Directive

89/336/EEC (EC-92), AS/NZS2064-1/ 2.

**Safety** – UL 61010B-1, CSA C22.2 No. 1010.1,

EN61010-1 second edition.

**Power Supply**

**Rating** –  $100$  to  $240\text{ VAC}$ .

**Range** –  $90$  to  $250\text{ VAC}$ .

**Maximum Power and Current** –  $240\text{ VA}$  and  $5\text{ A}$ .

**Frequency** –  $48$  to  $63\text{ Hz}$ .

**Physical Characteristics**

Dimensions	mm	in
Height	193	7.6
With Option 11	232	9.1
Width	434	17.1
Depth	508	20
<b>Weight</b>	<b>kg</b>	<b>lb</b>
Without Package	14.1	31.1
With Option 11	16.1	35.7
With Package	24.5	54
With Option 11	27.5	61.1

**Interfaces** – GPIB, Ethernet:  $10/100\text{Base-T}$ , RJ-45.

**PC Keyboard** – 6-Pin mini-DIN, rear.

# Arbitrary Waveform Generator

▶ AWG710B

## ▶ Ordering Information

### AWG710B

4.2 GS/s, 8-bit, 32 M point, single-channel arbitrary waveform generator.

**Includes:** User manual, Programmer's manual, Floppy disk: sample waveform library (063-A3740-00), performance verification (063-3721-00), Sample Program (062-A258-50), Certificate of Calibration, power cable. 50 Ω SMA Terminator 2 ea (015-1022-01).

Please specify power plug when ordering.

### Options

**Opt. 01** – 64 M points waveform memory.

**Opt. 02** – Extends analog bandwidth to 2 GHz (calculated based on rise time).

**Opt. 10\*2** – Flash disk and standby switch (alternative for standard hard disk drive).

**Note:** Option 10 is for ATE and system usage needing 7x24 hour operation. Also adds capability to power on/off by rear panel main switch.

**Opt. 11\*2** – Removable Hard Drive.

**Opt. 1R** – Rackmount kit.

### Service

**Opt. C3** – Calibration service 3 years.

**Opt. C5** – Calibration service 5 years.

**Opt. D1** – Calibration data report.

**Opt. D3** – Calibration data report 3 years (with option C3).

**Opt. D5** – Calibration data report 5 years (with option C5).

**Opt. R3** – Repair service 3 years.

**Opt. R5** – Repair service 5 years.

\*2Options 10 and 11 are mutually exclusive.

## Recommended Accessories

**Service Manual** – 071-1417-xx.

**Protective Cover** – 200-3696-01.

### Power Plug Options

**Opt. A0** – North America Power.

**Opt. A1** – Universal EURO Power.

**Opt. A2** – United Kingdom Power.

**Opt. A3** – Australia Power.

**Opt. A5** – Switzerland Power.

**Opt. A6** – Japan Power.

**Opt. A10** – China Power.

**Opt. A99** – No Power Cord or AC Adapter.

### Language Option

**Opt. L0** – English (User, Programmer).

**Opt. L5** – Japanese (User, Programmer).

### Warranty

One year parts and labor.

## Contact Tektronix:

**ASEAN / Australasia / Pakistan** (65) 6356 3900

**Austria** +43 2236 8092 262

**Belgium** +32 (2) 715 89 70

**Brazil & South America** 55 (11) 3741-8360

**Canada** 1 (800) 661-5625

**Central Europe & Greece** +43 2236 8092 301

**Denmark** +45 44 850 700

**Finland** +358 (9) 4783 400

**France & North Africa** +33 (0) 1 69 86 80 34

**Germany** +49 (221) 94 77 400

**Hong Kong** (852) 2585-6688

**India** (91) 80-22275577

**Italy** +39 (02) 25086 1

**Japan** 81 (3) 6714-3010

**Mexico, Central America & Caribbean** 52 (55) 56666-333

**The Netherlands** +31 (0) 23 569 5555

**Norway** +47 22 07 07 00

**People's Republic of China** 86 (10) 6235 1230

**Poland** +48 (0) 22 521 53 40

**Republic of Korea** 82 (2) 528-5299

**Russia, CIS & The Baltics** +358 (9) 4783 400

**South Africa** +27 11 254 8360

**Spain** +34 (91) 372 6055

**Sweden** +46 8 477 6503/4

**Taiwan** 886 (2) 2722-9622

**United Kingdom & Eire** +44 (0) 1344 392400

**USA** 1 (800) 426-2200

**USA** (Export Sales) 1 (503) 627-1916

For other areas contact Tektronix, Inc. at: 1 (503) 627-7111

Last Update March 01, 2004

Our most up-to-date product information is available at:  
[www.tektronix.com](http://www.tektronix.com)



Copyright © 2004, Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

04/04 HB/WWW

76W-14865-3