

B5-435-30S

ABSOLUTE MAXIMUM RATINGS

(Ta=25 °C)

PARAMETER	SYMBOL	MAX. RATING	Unit
Power Dissipation	P_D	120	mW
Peak Forward Current (1/10 Duty Cycle @1KHz)	I_{PF}	100	mA
Continuous Forward Current	I_{AF}	50	mA
Reverse Voltage	V_R	5.0	V
Operating Temperature Range	T_{OPR}	-40~+85	°C
Storage Temperature Range	T_{STG}	-40~+85	°C

Solder temperature 1.6 mm from body for 3 seconds at 260 °C


OPTICAL-ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Luminous Intensity	I_V	$I_F = 20mA$	2600	4000		mcd
Forward Voltage	V_F	$I_F = 20mA$		2.0	2.4	V
Reverse Current	I_R	$V_R = 5V$			10	uA
Viewing Angle	$2\theta_{1/2}$	$I_F = 20mA$		15		deg.
Peak Wavelength	λ_P	$I_F = 20mA$		610		nm
Dominant Wavelength	λ_D	$I_F = 20mA$		605		nm
Spectrum Radiation Bandwidth	$\Delta\lambda$	$I_F = 20mA$		20		nm


*Tolerance of Viewing Angle: -10 / +5 deg.

B5-435-30S

TYPICAL OPTICAL-ELECTRICAL CHARACTERISTIC CURVES

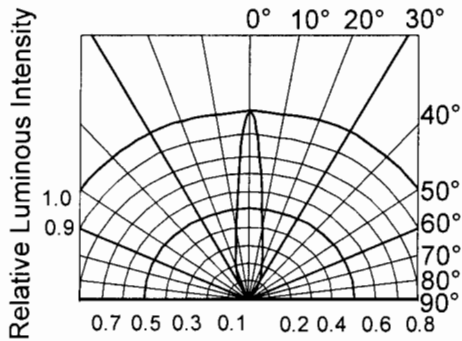


RADIATION DIAGRAM

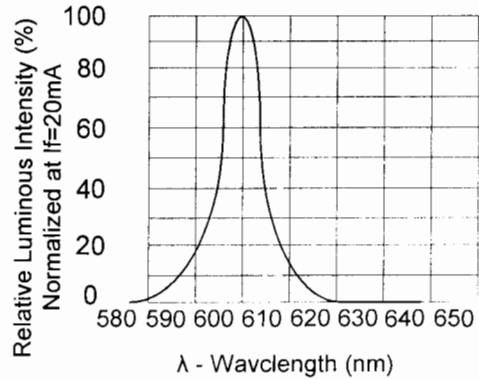


EINBETT

EN

RELATIVE LUMINOUS INTENSITY Vs. WAVELENGTH


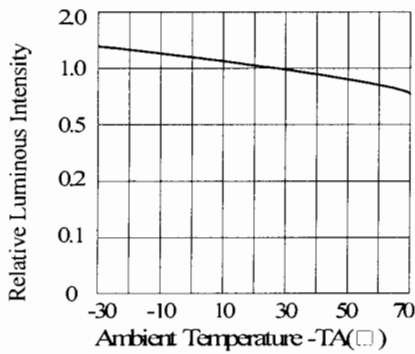


EINBETTEN

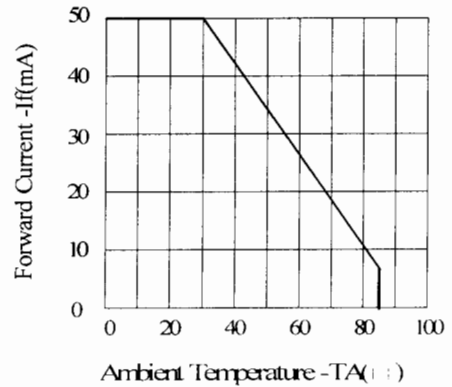

LUMINOUS INTENSITY Vs. AMBIENT TEMPERATURE

FORWARD CURRENT Vs. AMBIENT TEMPERATURE

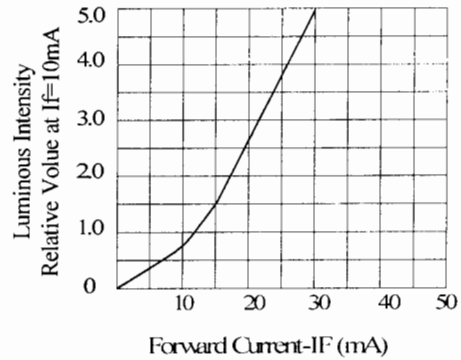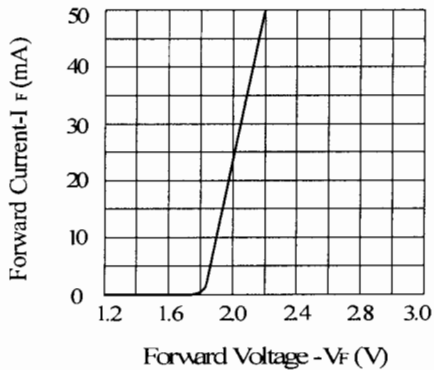

EINBETT

EN