


# SN600-PTR

## Printer

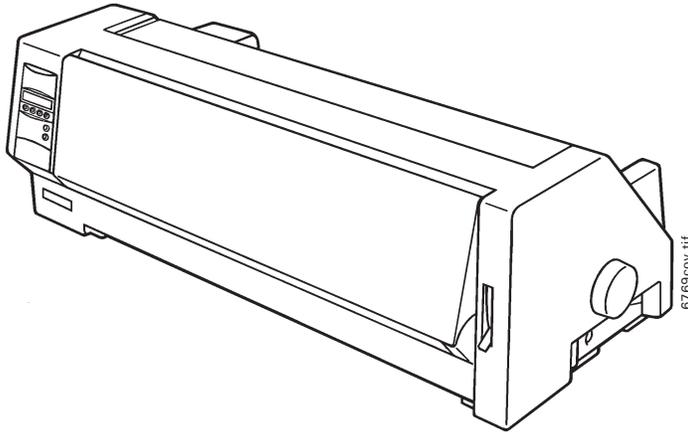

### Description

The SN600-PTR UL-Listed printer is used with Gamewell 600 Series Fire Alarm Control Panels (FACPs) to provide a written record of system events and status changes. It features enhanced ground isolation to reduce ground faults.

### Applications

The SN600-PTR printer is for use with Gamewell 600 Series FACPs. Printed transaction records reduce the man-hours required to install and maintain a system. A printed record of all system events (alarms, troubles, etc.) and status changes can be especially valuable in the event of a disputed incident.

### Construction and Operation

The printer is housed in its own separate enclosure and is suitable for placement on a desk top, counter, or table.

Consult the control panel installation manual for the proper method and pin numbers used to complete the electrical connection to the control panel.

**NOTE:** If printer operation is required during failure of primary power, use of a separate UL-Listed Uninterruptable Power Supply (UPS) system is recommended.

### Ordering Information

**SN600-PTR** Network parallel printer, 120 VAC power.

### Features

- Provides a hard-copy printout of all system events and status changes.
- Time-stamps the printed record of each event and status change with the current time-of-day and date.
- Uses standard 9" x 11" tractor-feed fanfold paper.
- Provides 80 columns of data at 10 characters per inch.
- Provides printed record of system configuration and addressable device parameters.
- Nine-pin print head.
- Very quiet (approximately 53 dBA).

### Specifications

- **Printing method:** Serial or parallel printing with 9-pin matrix print head.
- **Printing speed, copy draft:** 310 cps at 10 cpi.
- **Character density:** 10 cpi standard (12, 15, 17.1, and 20 cpi available via front panel).
- **Graphic resolution (V x H):** 144 x 240 dpi.
- **Ribbon life (approximate):** 4 million characters (DPQ).
- **Acoustic noise level:** 53 dBA (approx.).
- **Dimensions:** 19" (48.26 cm) wide x 7.9" (20.07 cm) high x 9.7" (24.64 cm) deep.
- **Weight:** 17.6 pounds (7.9 kg).
- **Power supply:** 120/240 VAC.
- **Power consumption:** 50 watts (operating).
- **Operating environment temperature:** 50°F to 104°F (10°C to 40°C).
- **Operating environment humidity:** 20% to 80% (noncondensing).

### Listings

Listings and approvals below apply to the basic SN600-PTR Printer. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- UL Listed: file S521.



A Honeywell Company

**Gamewell-FCI**

12 Clintonville Road  
Northford, CT 06472-1610

Phone: 203-484-7161

Fax: 203-484-7118

[www.gamewell-fci.com](http://www.gamewell-fci.com)

A Honeywell Company  
© 2006 Gamewell-FCI

Specifications and wiring information are provided for information only and are believed to be accurate. Gamewell-FCI assumes no responsibility for their use. Data and design are subject to change without notice. Installation and wiring instructions shipped with the product shall always be used for actual installation. For more information, contact Gamewell-FCI.