

MF3ICD21, MF3ICD41, MF3ICD81

MIFARE DESFire EV1 contactless multi-application IC

Rev. 02 — 6 March 2009

Product short data sheet

www.datasheet4u.com

1. General description

MIFARE DESFire EV1 is ideal for service providers wanting to use multi-application smart cards in transport schemes, eGovernment or identity applications. It fully complies with the requirements for fast and highly secure data transmission, flexible memory organization and interoperability with existing infrastructure.

MIFARE DESFire EV1 is based on open global standards for both air interface and cryptographic methods. It is compliant to all 4 levels of ISO/IEC 14443A and uses optional ISO/IEC 7816-4 commands.

Featuring an on-chip backup management system and the mutual three pass authentication, a MIFARE DESFire EV1 card can hold up to 28 different applications and 32 files per application. The size of each file is defined at the moment of its creation, making MIFARE DESFire EV1 a truly flexible and convenient product.

Additionally, an automatic anti-tear mechanism is available for all file types, which guarantees transaction oriented data integrity. With MIFARE DESFire EV1, data transfer rates up to 848 kbit/s can be achieved, allowing fast data transmission.

The main characteristics of this device are denoted by its name DESFire EV1: DES indicates the high level of security using a 3DES hardware cryptographic engine for enciphering transmission data and Fire indicates its outstanding position as a fast, innovative, reliable and secure IC in the contactless proximity transaction market. Hence, MIFARE DESFire EV1 brings many benefits to end users. Cardholders can experience convenient contactless ticketing while also having the possibility to use the same device for related applications such as payment at vending machines, access control or event ticketing. In other words, the MIFARE DESFire EV1 silicon solution offers enhanced consumer-friendly system design, in combination with security and reliability.

MIFARE DESFire EV1 delivers the perfect balance of speed, performance and cost efficiency. Its open concept allows future seamless integration of other ticketing media such as smart paper tickets, key fobs, and mobile ticketing based on Near Field Communication (NFC) technology. It is also fully compatible with the existing MIFARE reader hardware platform. MIFARE DESFire EV1 is your ticket to contactless systems worldwide.



2. Features

www.datasheet4u.com

2.1 Key features

- Fully ISO/IEC 14443 type A 1 to 4 compliant
- 8 KB EEPROM with fast programming¹
- Secure, high-speed command set
- Flexible file structure
- Anti-collision
- Unique 7-byte serial number (ISO cascade level 2)
- Data integrity: CRC and bit counting on physical layer
- Open DES/3DES crypto algorithm in hardware
- Open AES128 crypto algorithm in hardware
- Based on NXP advanced 0.14 μm NV technology
- Fast data transfer: 106 kbit/s, 212 kbit/s, 424 kbit/s, 848 kbit/s
- Functional backward-compatibility to MF3ICD40
- Composite CC EAL 4+ certification

3. Applications

- Advanced public transportation
- High secure access control
- Event ticketing
- eGovernment
- Identity

1. 2 KB and 4 KB versions are also available.

4. Quick reference data

www.datasheet4u.com

Table 1. Quick reference data [\[1\]](#)[\[2\]](#)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-------------------|---|-------|-------|-------|------|
| f_i | input frequency | | - | 13.56 | - | MHz |
| C_i | input capacitance | $T_{amb} = 22\text{ °C}$; $f_i = 13.56\text{ MHz}$; [3] 2.8 V RMS | 14.96 | 17.0 | 19.04 | pF |

EEPROM characteristics

| | | | | | | |
|---------------|------------------|--------------------------|--------|--------|---|-------|
| t_{ret} | retention time | $T_{amb} = 22\text{ °C}$ | 10 | - | - | year |
| $N_{endu(W)}$ | write endurance | $T_{amb} = 22\text{ °C}$ | 200000 | 500000 | - | cycle |
| $t_{cy(W)}$ | write cycle time | $T_{amb} = 22\text{ °C}$ | - | 2.9 | - | ms |

[1] Stresses above one or more of the values may cause permanent damage to the device.

[2] Exposure to limiting values for extended periods may affect device reliability.

[3] Measured with LCR meter.

5. Ordering information

Table 2. Ordering information

| Type number | Package | | Version |
|------------------|---------------------------|--|----------|
| | Name | Description | |
| MF3ICD8101DUD/04 | FFC | 8 inch wafer (sawn; 120 μm thickness, on film frame carrier; electronic fail die marking according to SECSII format); see Ref. 4 , 8K EEPROM | - |
| MF3ICD4101DUD/04 | FFC | 8 inch wafer (sawn; 120 μm thickness, on film frame carrier; electronic fail die marking according to SECSII format); see Ref. 4 , 4K EEPROM | - |
| MF3ICD2101DUD/04 | FFC | 8 inch wafer (sawn; 120 μm thickness, on film frame carrier; electronic fail die marking according to SECSII format); see Ref. 4 , 2K EEPROM | - |
| MF3MOD8101DA4/04 | PLLMC [1] | plastic leadless module carrier package; 35 mm wide tape; see Ref. 5 , 8K EEPROM | SOT500-2 |
| MF3MOD4101DA4/04 | PLLMC [1] | plastic leadless module carrier package; 35 mm wide tape; see Ref. 5 , 4K EEPROM | SOT500-2 |
| MF3MOD2101DA4/04 | PLLMC [1] | plastic leadless module carrier package; 35 mm wide tape; see Ref. 5 , 2K EEPROM | SOT500-2 |

[1] This package is also known as MOA4.

6. Block diagram

www.datasheet4u.com

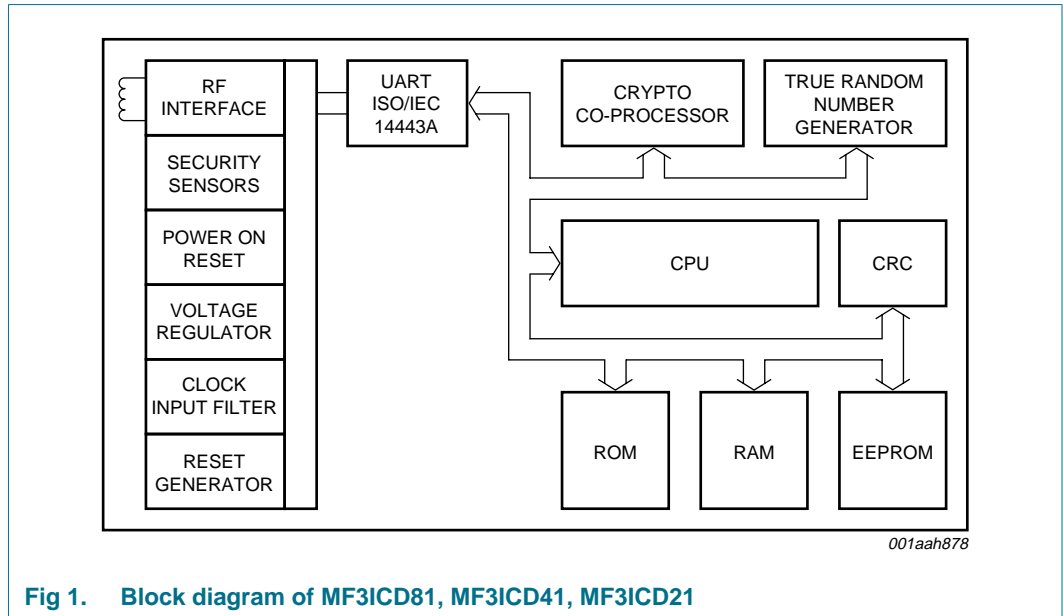


Fig 1. Block diagram of MF3ICD81, MF3ICD41, MF3ICD21

7. Limiting values

Table 3. Limiting values [1][2]

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol | Parameter | Conditions | Min | Max | Unit |
|----------------|-------------------------------------|------------|------|-----|------|
| I_i | input current | | - | 30 | mA |
| $P_{tot}/pack$ | total power dissipation per package | | - | 200 | mW |
| T_{stg} | storage temperature | | -55 | 125 | °C |
| T_{amb} | ambient temperature | | -25 | 70 | °C |
| V_{ESD} | electrostatic discharge voltage | [3] | 2 | - | kV |
| I_{lu} | latch-up current | | ±100 | - | mA |

[1] Stresses above one or more of the limiting values may cause permanent damage to the device.

[2] Exposure to limiting values for extended periods may affect device reliability.

[3] MIL Standard 883-C method 3015; human body model: C = 100 pF, R = 1.5 kΩ.

8. Functional description

www.datasheet4u.com

8.1 Contactless energy and data transfer

In the MIFARE system, the MIFARE DESFire EV1 is connected to a coil consisting of a few turns embedded in a standard ISO/IEC smart card (see [Ref. 7](#)). A battery is not needed. When the card is positioned in the proximity of the PCD antenna, the high speed RF communication interface allows data to be transmitted up to 848 kbit/s.

8.2 Anti-collision

An intelligent anti-collision mechanism allows more than one MIFARE DESFire EV1 in the field to be handled simultaneously. The anti-collision algorithm selects each MIFARE DESFire EV1 individually and ensures that the execution of a transaction with a selected MIFARE DESFire EV1 is performed correctly without data corruption resulting from other MIFARE DESFire EV1s in the field.

8.3 UID/serial number

The unique 7 byte (UID) is programmed into a locked part of the NV memory which is reserved for the manufacturer. Due to security and system requirements these bytes are write-protected after being programmed by the IC manufacturer at production time. According to ISO/IEC 14443-3 (see [Ref. 11](#)) during the first anti-collision loop the cascade tag returns a value of 88h and also the first 3 bytes of the UID, UID0 to UID2 and BCC. The second anti-collision loop returns bytes UID3 to UID6 and BCC.

SN0 holds the manufacturer ID for NXP (04h) according to ISO/IEC 14443-3 and ISO/IEC 7816-6 AMD 1.

MIFARE DESFire EV1 also allows Random ID to be used. In this case MIFARE DESFire EV1 only uses a single anti-collision loop. The 3 byte random number is generated after RF reset of the MIFARE DESFire EV1.

8.4 Memory organization

The 2/4/8 KB NV memory is organized using a flexible file system. This file system allows a maximum of 28 different applications on one MIFARE DESFire EV1. Each application provides up to 32 files. Every application is represented by its 3 bytes Application Identifier (AID).

Five different file types are supported; see [Section 8.5](#).

A guideline to assign DESFire AIDs can be found in the application note *MIFARE Application Directory* (MAD); see [Ref. 8](#).

Each file can be created either at MIFARE DESFire EV1 initialization (card production/card printing), at MIFARE DESFire EV1 personalization (vending machine) or in the field.

If a file or application becomes obsolete in operation, it can be permanently invalidated.

Commands which have impact on the file structure itself (e.g. creation or deletion of applications, change of keys) activate an automatic rollback mechanism, which protects the file structure from being corrupted.

If this rollback is necessary, it is done without user interaction before carrying out further commands. To ensure data integrity on application level, a transaction-oriented backup is implemented for all file types with backup. It is possible to mix file types with and without backup within one application.

As the commands are the same for MF3ICD81, MF3ICD41 and MF3ICD21, the command details are available in [Ref. 1](#). Only the memory size is different between the three devices.

8.5 Available file types

The files within an application can be any of the following types:

- Standard data files
- Backup data files
- Value files with backup
- Linear record files with backup
- Cyclic record files with backup

8.6 Security

The 7 byte UID is fixed, programmed into each device during production. It cannot be altered and ensures the uniqueness of each device.

The UID may be used to derive diversified keys for each ticket. Diversified MIFARE DESFire EV1 keys contribute to gain an effective anti-cloning mechanism and increase the security of the original key; see [Ref. 6](#).

Prior to data transmission a mutual three pass authentication can be done between MIFARE DESFire EV1 and PCD depending on the configuration employing either 56-bit DES (single DES, DES), 112-bit DES (triple DES, 3DES), 168-bit DES (3 key triple DES, 3K3DES) or AES. During the authentication the level of security of all further commands during the session is set. In addition the communication settings of the file/application result in the following options of secure communication between MIFARE DESFire EV1 and PCD:

- Plain data transfer (only possible within the backwards-compatible mode to MF3ICD40)
- Plain data transfer with cryptographic checksum (MAC): Authentication with backwards-compatible mode to MF3ICD40: 4 byte MAC, all other authentications based on DES/3DES/AES: 8 byte CMAC
- Encrypted data transfer (secured by CRC before encryption): Authentication with backwards-compatible mode to MF3ICD40: A 16-bit CRC is calculated over the stream and attached. The resulting stream is encrypted using the chosen cryptographic method. All other authentications based DES/3DES/AES: A 32-bit CRC is calculated over the stream and attached. The resulting stream is encrypted using the chosen cryptographic method.

Find more information on the security concept of the product in [Ref. 1](#). Be aware not all levels of security are recommended. The recommended secure handling of the product can be seen in [Ref. 2](#) and in [Ref. 10](#).

9. DESFire command set

www.datasheet4u.com

A detailed description of all commands is provided in [Ref. 1](#).

9.1 ISO/IEC 14443-3

Table 4. ISO/IEC 14443-3

| Command | Description |
|--------------------------------------|---|
| REQA | REQA and ATQA are implemented fully according to ISO/IEC 14443-3 |
| WUPA | WUPA is implemented fully according to ISO/IEC 14443-3 |
| ANTICOLLISION/SELECT Cascade Level 1 | ANTICOLLISION and SELECT commands are implemented fully according to ISO/IEC 14443-3; the response is part 1 of the UID |
| ANTICOLLISION/SELECT Cascade Level 2 | ANTICOLLISION and SELECT commands are implemented fully according to ISO/IEC 14443-3; the response is part 2 of the UID |
| HALT | brings MIFARE DESFire EV1 to the HALT state |

9.2 ISO/IEC 14443-4

Table 5. ISO/IEC 14443-4

| Command | Description |
|----------|---|
| RATS | identifies the MIFARE DESFire EV1 type to the PCD |
| PPS | allows individual selection of the communication baud rate between PCD and MIFARE DESFire EV1; for DESFire it is possible to set different communication baud rates for each direction i.e. DESFire allows a non-symmetrical information interchange speed. |
| WTX | if the MIFARE DESFire EV1 needs more time than the defined FWT to respond to a PCD command it requests a Waiting Time eXtension (WTX) |
| DESELECT | allows MIFARE DESFire EV1 to be brought to the HALT state |

www.datasheet4u.com

9.3 MIFARE DESFire EV1 command set overview – security related commands

Table 6. Security related commands

| Command | Description |
|--------------------|---|
| Authenticate | MIFARE DESFire EV1 and the reader device show in an encrypted way that they possess the same secret which especially means the same key; this not only confirms that both entities are permitted to perform operations on each other but also creates a session key which can be used to keep the further communication path secure; as the name “session key” implicitly indicates, each time a new authentication procedure is successfully completed a new key for further cryptographic operations is generated |
| Change KeySettings | changes the master key settings on MIFARE DESFire EV1 and application level |
| Set Configuration | configures the card and pre-personalizes the card with a key, defines if the UID or the random ID is sent back during communication setup and configures the ATS string |
| Change Key | changes any key stored on the MIFARE DESFire EV1 |
| Get Key Version | reads out the current key version of any key stored on the MIFARE DESFire EV1 |

Remark: All command and data frames are exchanged between MIFARE DESFire EV1 and PCD by using block format as defined in ISO/IEC 14443-4.

9.4 MIFARE DESFire EV1 command set overview – MIFARE DESFire EV1 level commands

Table 7. Level commands

| Command | Description |
|----------------------|---|
| Create Application | creates new applications on the MIFARE DESFire EV1 |
| Delete Application | permanently deactivates applications on the MIFARE DESFire EV1 |
| Get Applications IDs | returns the Application IDentifiers of all applications on a MIFARE DESFire EV1 |
| Free Memory | returns the free memory available on the card |
| GetDFNames | returns the DF names |
| Get KeySettings | gets information on the MIFARE DESFire EV1 and application master key settings; in addition it returns the maximum number of keys which are configured for the selected application |
| Select Application | selects one specific application for further access |
| FormatMF3ICD81 | releases the MF3ICD81 user memory |
| Get Version | returns manufacturing related data of the MIFARE DESFire EV1 |
| GetCardUID | returns the UID |

Remark: All command and data frames are exchanged between MIFARE DESFire EV1 and PCD by using block format as defined in ISO/IEC 14443-4.

www.datasheet4u.com

9.5 MIFARE DESFire EV1 command set overview – application level commands

Table 8. Application level commands

| Command | Description |
|-------------------------|---|
| Get FileIDs | returns the File IDentifiers of all active files within the currently selected application |
| Get FileSettings | gets information on the properties of a specific file |
| Change FileSettings | changes the access parameters of an existing file |
| Create StdDataFile | creates files for the storage of plain unformatted user data within an existing application on the MIFARE DESFire EV1 |
| Create BackupDataFile | creates files for the storage of plain unformatted user data within an existing application on the MIFARE DESFire EV1, additionally supporting the feature of an integrated backup mechanism |
| Create ValueFile | creates files for the storage and manipulation of 32-bit signed integer values within an existing application on the MIFARE DESFire EV1 |
| Create LinearRecordFile | creates files for multiple storage of similar structural data, for example, loyalty programs within an existing application on the MIFARE DESFire EV1; once the file is filled completely with data records, further writing to the file is not possible unless it is cleared |
| Create CyclicRecordFile | creates files for multiple storage of similar structural data, for example, logging transactions within an existing application on the MIFARE DESFire EV1; once the file is filled completely with data records, the MIFARE DESFire EV1 automatically overwrites the oldest record with the latest written one (this wrap is fully transparent for the PCD) |
| DeleteFile | permanently deactivates a file within the file directory of the currently selected application |

Remark: All command and data frames are exchanged between MIFARE DESFire EV1 and PCD by using block format as defined in ISO/IEC 14443-4.

9.6 MIFARE DESFire EV1 command set overview – data manipulation commands

Table 9. Data manipulation commands

| Command | Description |
|----------------|--|
| Read Data | reads data from Standard Data files or Backup Data files |
| Write Data | writes data to Standard Data files or Backup Data files |
| Get Value | reads the currently stored value from Value files |
| Credit | increases a value stored in a Value file |
| Debit | decreases a value stored in a Value file |
| Limited Credit | allows a limited increase of a value stored in a Value file without having full Credit permissions to the file |
| Write Record | writes data to a record in a Cyclic or Linear Record file |
| Read Records | reads out a set of complete records from a Cyclic or Linear Record file |

www.datasheet4u.com

Table 9. Data manipulation commands ...continued

| Command | Description |
|--------------------|---|
| Clear RecordFile | resets a Cyclic or Linear Record file to empty state |
| Commit Transaction | validates all previous write accesses on Backup Data files, Value files and Record files within one application |
| Abort Transaction | invalidates all previous write accesses on Backup Data files, Value files and Record files within one application |

Remark: All command and data frames are exchanged between MIFARE DESFire EV1 and PCD by using block format as defined in ISO/IEC 14443-4.

9.7 MIFARE DESFire EV1 command set - ISO/IEC 7816 APDU commands

The MIFARE DESFire EV1 provides the following commands according to ISO/IEC 7816-4:

- INS code 'A4' SELECT
- INS code 'B0' READ BINARY
- INS code 'D6' UPDATE BINARY
- INS code 'B2' READ RECORDS
- INS code 'E2' APPEND RECORD
- INS code '84' GET CHALLENGE
- INS code '88' INTERNAL AUTHENTICATE
- INS code '82' EXTERNAL AUTHENTICATE

9.7.1 ISO/IEC 7816-4 APDU message structure

DESFire supports the APDU message structure according to ISO/IEC 7816-4 for:

- an optional wrapping of the native DESFire APDU format
- additionally implemented ISO/IEC 7816-4 commands

Find more information on the ISO/IEC 7816-4 commands in [Ref. 1](#).

10. Abbreviations

www.datasheet4u.com

Table 10. Abbreviations

| Acronym | Description |
|---------|---|
| AES | Advanced Encryption Standard |
| AID | Application IDentifier |
| APDU | Application Protocol Data Unit |
| ATS | Answer to Select |
| CC | Common Criteria |
| CMAC | Cryptic Message Authentication Code |
| CRC | Cyclic Redundancy Check |
| DES | Digital Encryption Standard |
| DF | Dedicated File |
| EAL | Evaluation Assurance Level |
| EEPROM | Electrically Erasable Programmable Read-Only Memory |
| FWT | Frame Waiting Time |
| ID | IDentifier |
| INS | Instructions |
| LCR | inductance, Capacitance, Resistance |
| MAC | Message Authentication Code |
| MAD | MIFARE Application Directory |
| NV | Non-Volatile Memory |
| PCD | Proximity Coupling Device |
| PPS | Protocol Parameter Selection |
| RATS | Request Answer To Select |
| REQA | Request Answer |
| RF | Radio Frequency |
| UID | Unique Identifier |
| WTX | Waiting Time eXtension |
| WUPA | Wake Up Protocol A |

11. References

www.datasheet4u.com

- [1] **Data sheet** — *MF3ICD81 MIFARE DESFire Functional Specification*, document number: 1340345.
- [2] **Data sheet** — *MF3ICD81 Guidance, Delivery and Operation Manual*, document number: 146934.
- [3] **Data sheet** — *Specification addendum MF3ICD81*, document number: 167310.
- [4] **Data sheet** — *MF3ICD8101 Sawn bumped 120 μm wafer addendum*, document number: 131831.
- [5] **Data sheet** — *MF3MOD81 Contactless chip card module*, document number: 143931.
- [6] **Application note** — *MIFARE DESFire - Implementation hints and examples*, document number: 094532.
- [7] **Application note** — *MIFARE (Card) Coil Design Guide Product Specification*, document number: 011732.
- [8] **Application note** — *MIFARE Application Directory*, document number: 001830.
- [9] **Application note** — *MIFARE ISO/IEC 14443 MF3ICD81 Selection*, document number: 130810.
- [10] **Application note** — *End to end system security risk considerations for implementing contactless cards*, document number: 155010.
- [11] **ISO/IEC Standard** — *ISO/IEC 14443 Identification cards - Contactless integrated circuit cards - Proximity cards*.

12. Revision history

www.datasheet4u.com

Table 11. Revision history

| Document ID | Release date | Data sheet status | Change notice | Supersedes |
|----------------------|--|----------------------------|---------------|--------------------|
| MF3ICD21_41_81_SDS_2 | 20090306 | Product short data sheet | - | MF3ICD8101_SDS_N_1 |
| Modifications: | <ul style="list-style-type: none"> • Section 5 "Ordering information": type number MF3ICD8101DUD/01 changed to MF3ICD8101DUD/04 • Section 5 "Ordering information": added root type numbers MF3ICD41 and MF3ICD21 • Section 1 "General description", Section 2 "Features" and Section 3 "Applications" updated • Section 11 "References" added | | | |
| MF3ICD8101_SDS_N_1 | 20071213 | Objective short data sheet | - | - |

13. Legal information

www.datasheet4u.com

13.1 Data sheet status

| Document status ^{[1][2]} | Product status ^[3] | Definition |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet | Development | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification | This document contains data from the preliminary specification. |
| Product [short] data sheet | Production | This document contains the product specification. |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

13.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

13.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental

damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

13.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

MIFARE — is a trademark of NXP B.V.

DESFire — is a trademark of NXP B.V.

14. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

15. Tables

www.datasheet4u.com

| | | | |
|--|---|---|----|
| Table 1. Quick reference data [1][2] | 3 | Table 7. Level commands | 8 |
| Table 2. Ordering information | 3 | Table 8. Application level commands | 9 |
| Table 3. Limiting values [1][2] | 4 | Table 9. Data manipulation commands | 9 |
| Table 4. ISO/IEC 14443-3 | 7 | Table 10. Abbreviations | 11 |
| Table 5. ISO/IEC 14443-4 | 7 | Table 11. Revision history | 13 |
| Table 6. Security related commands | 8 | | |

16. Figures

| | |
|--|---|
| Fig 1. Block diagram of MF3ICD81, MF3ICD41, MF3ICD21 | 4 |
|--|---|

17. Contents

| | | | | | |
|-----------|---|-----------|-----------|--------------------------------------|-----------|
| 1 | General description | 1 | 11 | References | 12 |
| 2 | Features | 2 | 12 | Revision history | 13 |
| 2.1 | Key features | 2 | 13 | Legal information | 14 |
| 3 | Applications | 2 | 13.1 | Data sheet status | 14 |
| 4 | Quick reference data | 3 | 13.2 | Definitions | 14 |
| 5 | Ordering information | 3 | 13.3 | Disclaimers | 14 |
| 6 | Block diagram | 4 | 13.4 | Trademarks | 14 |
| 7 | Limiting values | 4 | 14 | Contact information | 14 |
| 8 | Functional description | 5 | 15 | Tables | 15 |
| 8.1 | Contactless energy and data transfer | 5 | 16 | Figures | 15 |
| 8.2 | Anti-collision | 5 | 17 | Contents | 15 |
| 8.3 | UID/serial number | 5 | | | |
| 8.4 | Memory organization | 5 | | | |
| 8.5 | Available file types | 6 | | | |
| 8.6 | Security | 6 | | | |
| 9 | DESFire command set | 7 | | | |
| 9.1 | ISO/IEC 14443-3 | 7 | | | |
| 9.2 | ISO/IEC 14443-4 | 7 | | | |
| 9.3 | MIFARE DESFire EV1 command set overview – security related commands | 8 | | | |
| 9.4 | MIFARE DESFire EV1 command set overview – MIFARE DESFire EV1 level commands | 8 | | | |
| 9.5 | MIFARE DESFire EV1 command set overview – application level commands | 9 | | | |
| 9.6 | MIFARE DESFire EV1 command set overview – data manipulation commands | 9 | | | |
| 9.7 | MIFARE DESFire EV1 command set - ISO/IEC 7816 APDU commands | 10 | | | |
| 9.7.1 | ISO/IEC 7816-4 APDU message structure | 10 | | | |
| 10 | Abbreviations | 11 | | | |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



© NXP B.V. 2009. All rights reserved.

For more information, please visit: <http://www.nxp.com>
 For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 6 March 2009
 Document identifier: MF3ICD21_41_81_SDS_2