

2,000 V - 5,000 V Rectifiers

0.75 A - 2.00 A Forward Current

30 ns - 50 ns Recovery Time

1N6836LL 1N6837LL
1N6838LL 1N6839LL



FORMED LEAD
 HERMETICALLY SEALED



ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V _{rw})	Average Rectified Current (I _o)		Reverse Current @ V _{rw} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current t _p =8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (3) (T _{rr})	Thermal Impd. θ _{J-C}	Junction Cap. @50VDC @1kHz (C _j)
		55°C(1)	100°C(2)	25°C	100°C	25°C		25°C	25°C	25°C	25°C	25°C
	Volts	Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	ns	°C / W	pF
1N6836LL 1N6837LL	2000 5000	1.50 0.75	1.00 0.50	1.0 1.0	25 25	6.00 12.0	1.00 0.50	40 20	5 4	30 30	5.0 5.0	20 16
1N6838LL 1N6839LL	2000 5000	2.00 1.00	1.50 0.60	1.0 1.0	25 25	4.50 10.0	1.50 0.60	60 30	10 6	50 50	5.0 5.0	20 16

(1)TC=55°C (2)TC=100°C (3)I_f=0.5A, I_r=1.0A, I_{rr}=0.25A • Op.Temp.= -65°C to +175°C Stg.Temp.= -65°C to +200°C

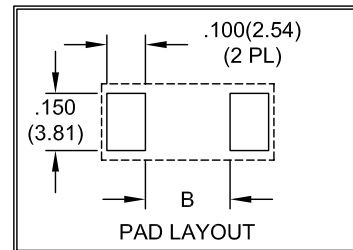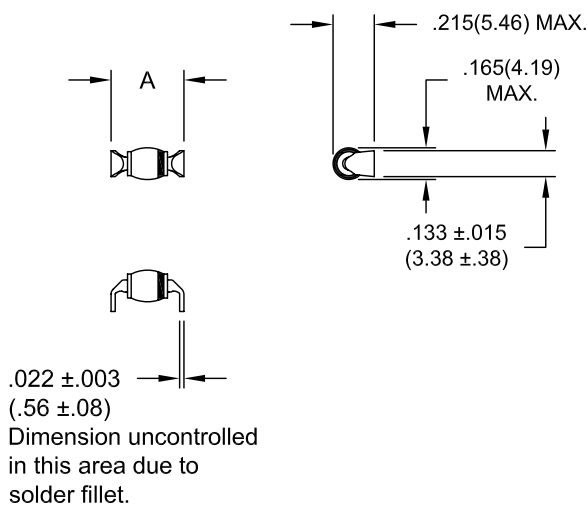

Part	A	B
1N6836LL	.350(8.89) MAX.	.220 (5.59)
1N6837LL	.390(9.91) MAX.	.260 (6.60)
1N6838LL	.350(8.89) MAX.	.220 (5.59)
1N6839LL	.390(9.91) MAX.	.260 (6.60)



Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
 8711 W. Roosevelt Ave.
 Visalia, CA 93291

TEL 559-651-1402
 FAX 559-651-0740
 www.voltagemultipliers.com

1N6836LL 1N6837LL 1N6838LL 1N6839LL

