

Features

- 72-Pin Small Outline Dual-In-Line Memory Module
- Performance:

		-60	-70
t_{RAC}	RAS Access Time	60ns	70ns
t_{CAC}	CAS Access Time	15ns	20ns
t_{AA}	Access Time From Address	30ns	35ns
t_{RC}	Cycle Time	110ns	130ns
t_{PC}	Fast Page Mode Cycle Time	40ns	45ns

- High Performance CMOS process
- Single $3.3 \pm 0.3V$ or $5.0 \pm 0.25V$ Power Supply
- Low active current consumption

- All inputs & outputs are TTL(5V) or LVTTTL(3.3V) compatible
- Fast Page Mode access cycle
- Refresh Modes: RAS-Only, CBR, Hidden Refresh and Self Refresh
- 2048 refresh cycles distributed across 256ms
- 11/11 Addressing (Row/Column)
- Optimized for use in byte-write non-parity applications.
- Au contacts


Description

The IBM11S4320BN/L are 16MB 72-pin 4-byte small outline dual in-line memory modules (SODIMMs). The module is organized as a 4Mx32 high speed memory array that is intended for use in 16, 32 and 64 bit applications. It is manufactured with 8 4Mx4 TSOP devices, each in a 300mil package.

This assembly is intended for use in space constrained and or low power applications.

The IBM 72-Pin SODIMMs provide a high performance, flexible 4-byte interface in a 2.35" long footprint.

Card Outline

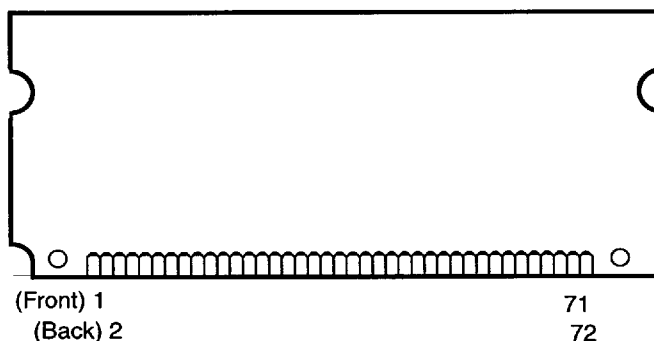

Pin Description

$\overline{\text{RAS0}} - \overline{\text{RAS3}}$	Row Address Strobe
$\overline{\text{CAS0}} - \overline{\text{CAS3}}$	Column Address Strobe
$\overline{\text{WE}}$	Read/write Input
A0 - A10	Address Inputs
DQ0-7, 9-16, 18-25, 27-34	Data Input/output
V _{CC}	Power (+3.3V or +5V)
V _{SS}	Ground
NC	No Connect
PD1 - PD7	Presence Detects


Pinout

Pin#	Name	Pin#	Name	Pin#	Name	Pin#	Name	Pin#	Name	Pin#	Name
1	V _{SS}	13	A1	25	DQ13	37	DQ18	49	DQ20	61	V _{CC}
2	DQ0	14	A2	26	DQ14	38	DQ19	50	DQ21	62	DQ32
3	DQ1	15	A3	27	DQ15	39	V _{SS}	51	DQ22	63	DQ33
4	DQ2	16	A4	28	A7	40	$\overline{\text{CAS0}}$	52	DQ23	64	DQ34
5	DQ3	17	A5	29	NC	41	$\overline{\text{CAS2}}$	53	DQ24	65	NC
6	DQ4	18	A6	30	V _{CC}	42	$\overline{\text{CAS3}}$	54	DQ25	66	PD2
7	DQ5	19	A10	31	A8	43	$\overline{\text{CAS1}}$	55	NC	67	PD3
8	DQ6	20	NC	32	A9	44	$\overline{\text{RAS0}}$	56	DQ27	68	PD4
9	DQ7	21	DQ9	33	NC	45	NC	57	DQ28	69	PD5
10	V _{CC}	22	DQ10	34	$\overline{\text{RAS2}}$	46	NC	58	DQ29	70	PD6
11	PD1	23	DQ11	35	DQ16	47	$\overline{\text{WE}}$	59	DQ31	71	PD7
12	A0	24	DQ12	36	NC	48	NC	60	DQ30	72	V _{SS}

Ordering Information

Part Number	Organization	Speed	Dimensions	Power	DRAM Die Revision	Notes
IBM11S4320BNA-60	4M x 32	60ns	2.35" x 1" x .1496"	3.3V	C	
IBM11S4320BNA-70	4M x 32	70ns	2.35" x 1" x .1496"	3.3V	C	
IBM11S4320BLA-60	4M x 32	60ns	2.35" x 1" x .1496"	5.0V	C	
IBM11S4320BLA-70	4M x 32	70ns	2.35" x 1" x .1496"	5.0V	C	
IBM11S4320BNB-60	4M x 32	60ns	2.35" x 1" x .1496"	3.3V	D	
IBM11S4320BNB-70	4M x 32	70ns	2.35" x 1" x .1496"	3.3V	D	
IBM11S4320BLB-60	4M x 32	60ns	2.35" x 1" x .1496"	5.0V	D	
IBM11S4320BLB-70	4M x 32	70ns	2.35" x 1" x .1496"	5.0V	D	

Block Diagram

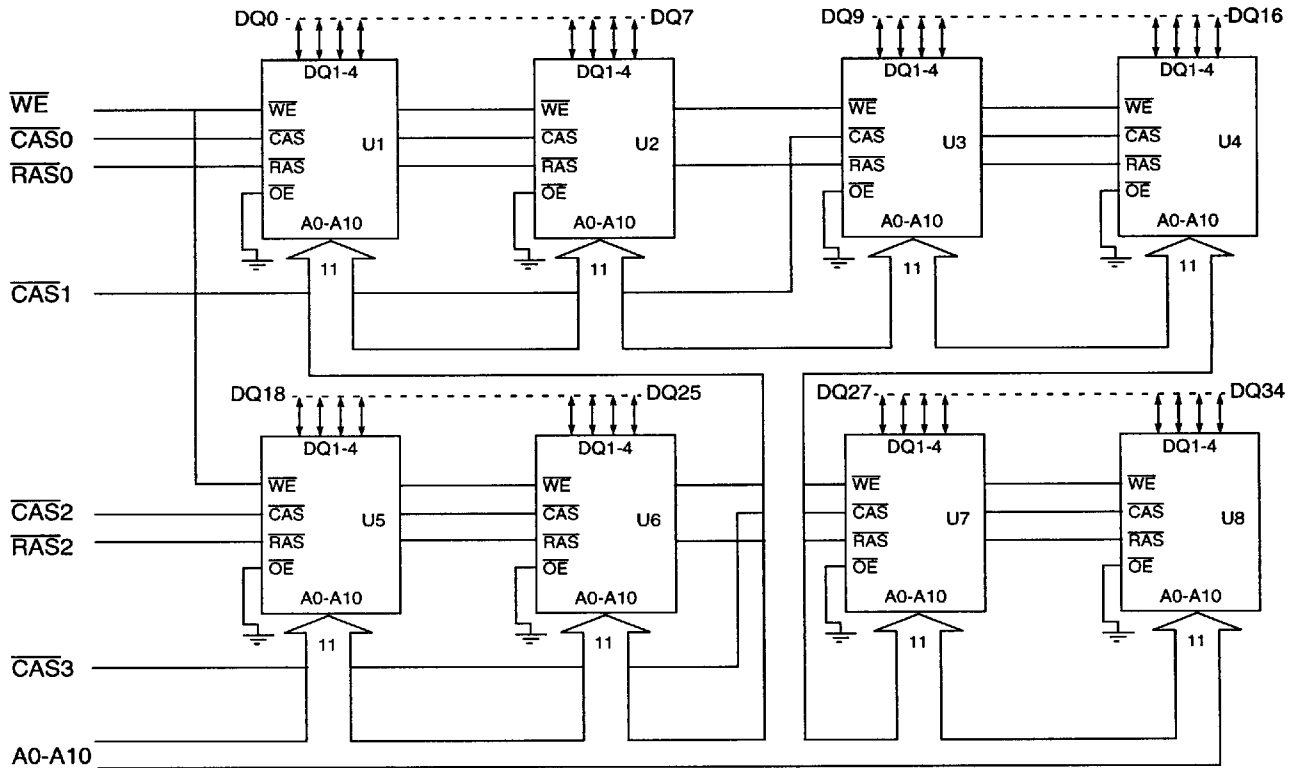

Truth Table

Function		$\overline{\text{RAS}}$	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	Row Address	Column Address	All DQ bits
Standby		H	X	X	X	X	High Impedance
Read		L	L	H	Row	Col	Valid Data Out
Early-Write		L	L	L	Row	Col	Valid Data In
Fast Page Mode - Read: 1st Cycle		L	H→L	H	Row	Col	Valid Data Out
Subsequent Cycles		L	H→L	H	N/A	Col	Valid Data Out
Fast Page Mode - Write: 1st Cycle		L	H→L	L	Row	Col	Valid Data In
Subsequent Cycles		L	H→L	L	N/A	Col	Valid Data In
$\overline{\text{RAS}}$ -Only Refresh		L	H	X	Row	N/A	High Impedance
$\overline{\text{CAS}}$ -Before- $\overline{\text{RAS}}$ Refresh		H→L	L	H	X	X	High Impedance
Hidden Refresh	Read	L→H→L	L	H	Row	Col	Data Out
	Write	L→H→L	L	H	Row	Col	Data In
Self Refresh		H→L	L	H	X	X	High Impedance

Presence Detect

Pin	-60	-70
PD1	NC	NC
PD2	NC	NC
PD3	V _{SS}	V _{SS}
PD4	NC	NC
PD5	NC	V _{SS}
PD6	NC	NC
PD7	NC	NC

1. NC= OPEN, V_{SS} = GND

Absolute Maximum Ratings

Symbol	Parameter	Rating		Units	Notes
		3.3 Volt	5.0 Volt		
V_{CC}	Power Supply Voltage	-0.5 to +4.6	-1.0 to +7.0	V	1
V_{IN}	Input Voltage	-0.7 to min ($V_{CC} + 0.5$, 4.6)	-0.5 to min ($V_{CC} + 0.5$, 7.0)	V	1
V_{OUT}	Output Voltage	-0.5 to min ($V_{CC} + 0.5$, 4.6)	-0.5 to min ($V_{CC} + 0.5$, 7.0)	V	1
T_{OPR}	Operating Temperature	0 to +70	0 to +70	°C	1
T_{STG}	Storage Temperature	-55 to +150	-55 to +150	°C	1
P_D	Power Dissipation	3.5	5.0	W	1
I_{OUT}	Short Circuit Output Current	50	50	mA	1

1. Stresses greater than those listed may cause permanent damage to the device. This is a stress rating only, and device functional operation at or above the conditions indicated is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Recommended DC Operating Conditions ($T_A = 0$ to 70°C)

Symbol	Parameter	3.3 Volt			5.0 Volt			Units	Notes
		Min	Typ	Max	Min	Typ	Max		
V_{CC}	Supply Voltage	3.0	3.3	3.6	4.75	5.0	5.25	V	1
V_{IH}	Input High Voltage	2.0	—	$V_{CC} + 0.5$	2.4	—	$V_{CC} + 0.5$	V	1, 2
V_{IL}	Input Low Voltage	-0.5	—	0.8	-0.5	—	0.8	V	1, 2

1. All voltages referenced to V_{SS} .
2. V_{IH} may overshoot to $V_{CC} + 1.2\text{V}$ for pulse widths of $\leq 4.0\text{ns}$ with 3.3 Volt, or $V_{CC} + 2.0\text{V}$ for pulse widths of $\leq 4.0\text{ns}$ (or $V_{CC} + 1.0\text{V}$ for $\leq 8.0\text{ns}$) with 5.0 Volt. Additionally, V_{IL} may undershoot to -1.2V for pulse widths $\leq 4.0\text{ns}$ with 3.3 Volt, or to -2.0V for pulse widths $\leq 4.0\text{ns}$ (or -1.0V for $\leq 8.0\text{ns}$) with 5.0 Volt. Pulse widths measured at 50% points with amplitude measured peak to DC reference.

Capacitance ($T_A = 0$ to $+70^\circ\text{C}$, $V_{CC} = 3.3 \pm 0.3\text{V}$ or $5.0 \pm 0.25\text{V}$)

Symbol	Parameter	Max	Units	Notes
C_{I1}	Input Capacitance (A0-A10)	53	pF	
C_{I2}	Input Capacitance ($\overline{\text{RAS}}$)	40	pF	
C_{I3}	Input Capacitance ($\overline{\text{CAS}}$)	23	pF	
C_{I4}	Input Capacitance ($\overline{\text{WE}}$)	67	pF	
C_{IO}	Input - Output Capacitance (DQ0-DQ34)	15	pF	

DC Electrical Characteristics (T_A = 0 to +70°C, V_{CC} = 3.3 ± 0.3V or 5.0 ± 0.25V)

Symbol	Parameter		3.3 Volt		5.0 Volt		Units	Notes
			Min	Max	Min	Max		
I _{CC1}	Operating Current Average Power Supply Operating Current (RAS, CAS, Address Cycling: t _{RC} = t _{RC} min)	-60	—	1000	—	1000	mA	1, 2, 3
		-70	—	880	—	880		
I _{CC2}	Standby Current (TTL) Power Supply Standby Current (RAS = CAS ≥ V _{IH})		—	16	—	16	mA	
I _{CC3}	RAS Only Refresh Current Average Power Supply Current, RAS Only Mode (RAS Cycling, CAS ≥ V _{IH} ; t _{RC} = t _{RC} min)	-60	—	1000	—	1000	mA	1, 3
		-70	—	880	—	880		
I _{CC4}	Fast Page Mode Current Average Power Supply Current, Fast Page Mode (RAS = V _{IL} , CAS, Address Cycling: t _{PC} = t _{PC} min)	-60	—	920	—	920	mA	1, 2, 3
		-70	—	800	—	800		
I _{CC5}	Standby Current (CMOS) Power Supply Standby Current (RAS = CAS = V _{CC} - 0.2V)		—	1.6	—	1.6	mA	
I _{CC6}	CAS Before RAS Refresh Current Average Power Supply Current, CAS Before RAS Mode (RAS, CAS, Cycling: t _{RC} = t _{RC} min)	-60	—	1000	—	1000	mA	1, 3
		-70	—	880	—	880		
I _{CC7}	Self Refresh Current Average Power Supply Current during Self Refresh CBR cycle with RAS ≥ t _{RASS} (min); CAS held low; WE = V _{CC} - 0.2V; Addresses and D _{IN} = V _{CC} - 0.2V or 0.2V.	-60	—	1600	—	2400	μA	
		-70	—	1600	—	2400		
I _{IL}	Input Leakage Current Input Leakage Current, any input (0.0 ≤ V _{IN} ≤ (V _{CC} - 6.0V)) All Other Pins Not Under Test = 0V	RAS	-40	+40	-40	+40	μA	
		CAS	-20	+20	-20	+20		
		All others	-80	+80	-80	+80		
I _{OL}	Output Leakage Current (D _{OUT} is disabled, 0.0 ≤ V _{OUT} ≤ V _{CC})		-10	+10	-10	+10	μA	
V _{OH}	Output High Level Output "H" Level Voltage (I _{OUT} = -5mA @ 2.4V)		2.4	V _{CC}	2.4	V _{CC}	V	
V _{OL}	Output Low Level Output "L" Level Voltage (I _{OUT} = +4.2mA @ 0.4V)		0.0	0.4	0.0	0.4	V	

1. I_{CC1}, I_{CC3}, I_{CC4} and I_{CC6} depend on cycle rate.
2. I_{CC1}, I_{CC4} depend on output loading. Specified values are obtained with the output open.
3. Address can be changed once or less while RAS = V_{IL}. In the case of I_{CC4}, it can be changed once or less when CAS = V_{IH}.

AC Characteristics ($T_A = 0$ to $+70^\circ\text{C}$, $V_{CC} = 3.3$ 0.3V or 5.0 0.25V)

1. An initial pause of 200 μs is required after power-up followed by 8 $\overline{\text{RAS}}$ only refresh cycles before proper device operation is achieved. In case of using the internal refresh counter, a minimum of 8 $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycles instead of 8 $\overline{\text{RAS}}$ only refresh cycles is required.
2. AC measurements assume $t_T=5\text{ns}$.
3. $V_{IH}(\text{min.})$ and $V_{IL}(\text{max.})$ are reference levels for measuring timing of input signals. Also, transition times are measured between V_{IH} and V_{IL} .

Read, Write, and Refresh Cycles (Common Parameters)

Symbol	Parameter	-60		-70		Units	Notes
		Min	Max	Min	Max		
t_{RC}	Random Read or Write Cycle Time	110	—	130	—	ns	
t_{RP}	$\overline{\text{RAS}}$ Precharge Time	40	—	50	—	ns	
t_{CP}	$\overline{\text{CAS}}$ Precharge Time	10	—	10	—	ns	
t_{RAS}	$\overline{\text{RAS}}$ Pulse Width	60	10K	70	10K	ns	
t_{CAS}	$\overline{\text{CAS}}$ Pulse Width	15	10K	20	10K	ns	
t_{ASR}	Row Address Setup Time	0	—	0	—	ns	
t_{RAH}	Row Address Hold Time	10	—	10	—	ns	
t_{ASC}	Column Address Setup Time	0	—	0	—	ns	
t_{CAH}	Column Address Hold Time	15	—	15	—	ns	
t_{RCD}	$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ Delay Time	20	45	20	50	ns	1
t_{RAD}	$\overline{\text{RAS}}$ to Column Address Delay Time	15	30	15	20	35	2
t_{RSH}	$\overline{\text{RAS}}$ Hold Time	15	—	20	—	ns	
t_{CSH}	$\overline{\text{CAS}}$ Hold Time	60	—	70	—	ns	
t_{CRP}	$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ Precharge Time	5	—	5	—	ns	
t_{DZC}	$\overline{\text{CAS}}$ Delay Time from D_{IN}	0	—	0	—	ns	
t_T	Transition Time (Rise and Fall)	3	30	3	30	ns	
t_{AR}	Column Address Hold Time Referenced to $\overline{\text{RAS}}$	—	—	—	—	ns	3

1. Operation within the $t_{RCD}(\text{max})$ limit ensures that $t_{RAC}(\text{max})$ can be met. $t_{RCD}(\text{max})$ is specified as a reference point only: if t_{RCD} is greater than the specified $t_{RCD}(\text{max})$ limit, then access time is controlled by t_{CAC} .

2. Operation within the $t_{RAD}(\text{max})$ limit ensures that $t_{RAC}(\text{max})$ can be met. $t_{RAD}(\text{max})$ is specified as a reference point only: If t_{RAD} is greater than the specified $t_{RAD}(\text{max})$ limit, then access time is controlled by t_{AA} .

3. This timing parameter is not applicable to this product, but applies to a related product in this family.

Write Cycle

Symbol	Parameter	-60		-70		Units	Notes
		Min	Max	Min	Max		
t_{WCS}	Write Command Set Up Time	0	—	0	—	ns	
t_{WCH}	Write Command Hold Time	15	—	15	—	ns	
t_{WP}	Write Command Pulse Width	15	—	15	—	ns	
t_{RWL}	Write Command to $\overline{RAS}$ Lead Time	15	—	20	—	ns	
t_{CWL}	Write Command to $\overline{CAS}$ Lead Time	15	—	20	—	ns	
t_{WCR}	Write Command Hold Time Referenced to $\overline{RAS}$	—	—	—	—	ns	1
t_{DHR}	Data Hold Time Referenced to $\overline{RAS}$	—	—	—	—	ns	1
t_{DS}	D_{IN} Setup Time	0	—	0	—	ns	
t_{DH}	D_{IN} Hold Time	15	—	15	—	ns	

1. This timing parameter is not applicable to this product, but applies to a related product in this family.

Read Cycle

Symbol	Parameter	-60		-70		Units	Notes
		Min	Max	Min	Max		
t_{RAC}	Access Time from $\overline{RAS}$	—	60	—	70	ns	1, 2, 3
t_{CAC}	Access Time from $\overline{CAS}$	—	15	—	20	ns	1, 3
t_{AA}	Access Time from Address	—	30	—	35	ns	2, 3
t_{RCS}	Read Command Setup Time	0	—	0	—	ns	
t_{RCH}	Read Command Hold Time to $\overline{CAS}$	0	—	0	—	ns	4
t_{RRH}	Read Command Hold Time to $\overline{RAS}$	5	—	5	—	ns	4
t_{RAL}	Column Address to $\overline{RAS}$ Lead Time	30	—	35	—	ns	
t_{CAL}	Column Address to $\overline{CAS}$ Lead Time	30	—	35	—	ns	
t_{CLZ}	$\overline{CAS}$ to Output in Low-Z	0	—	0	—	ns	3
t_{OH}	Output Data Hold Time	3	—	3	—	ns	
t_{CDD}	$\overline{CAS}$ to D_{IN} Delay Time	15	—	20	—	ns	
t_{OFF}	Output Buffer Turn-off Delay	—	15	—	20	ns	5

1. Operation within the $t_{RCD}(\max.)$ limit ensures that $t_{RAC}(\max.)$ can be met. $t_{RCD}(\max.)$ is specified as a reference point only. If t_{RCD} is greater than the specified $t_{RCD}(\max.)$ limit, then access time is controlled by t_{CAC} .
2. Operation within the $t_{RAD}(\max.)$ limit ensures that $t_{RAC}(\max.)$ can be met. $t_{RAD}(\max.)$ is specified as a reference point only. If t_{RAD} is greater than the specified $t_{RAD}(\max.)$ limit, then access time is controlled by t_{AA} .
3. Measured with the specified current load and 100pF.
4. Either t_{RCH} or t_{RRH} must be satisfied for a read cycle.
5. $t_{OFF}(\max)$ defines the time at which the output achieves the open circuit condition and is not referenced to output voltage levels.

Fast Page Mode Cycle

Symbol	Parameter	-60		-70		Units	Notes
		Min	Max	Min	Max		
t_{PC}	Fast Page Mode Cycle Time	40	—	45	—	ns	
t_{RASP}	Fast Page Mode RAS Pulse Width	60	100K	70	100K	ns	
t_{CPRH}	RAS Hold Time from $\overline{CAS}$ Precharge	35	—	40	—	ns	
t_{CPA}	Access Time from $\overline{CAS}$ Precharge	—	35	—	40	ns	1, 2

1. Measured with the specified current load and 100pF.
2. Access Time is determined by the latter of t_{CAC} , t_{CPA} .

Refresh Cycle

Symbol	Parameter	-60		-70		Units	Notes
		Min	Max	Min	Max		
t_{CHR}	CAS Hold Time (CAS before RAS Refresh Cycle)	20	—	20	—	ns	
t_{CSR}	CAS Setup Time (CAS before RAS Refresh Cycle)	10	—	10	—	ns	
t_{WRP}	$\overline{WE}$ Setup Time (CAS before RAS Refresh Cycle)	10	—	10	—	ns	
t_{WRH}	$\overline{WE}$ Hold Time (CAS before RAS Refresh Cycle)	10	—	10	—	ns	
t_{RPC}	RAS Precharge to $\overline{CAS}$ Hold Time	5	—	5	—	ns	
t_{REF}	Refresh Period	—	256	—	256	ms	1


1. 2048 refreshes are required every 128ms.

Self Refresh Cycle


Symbol	Parameter	-60		-70		Units	Notes
		Min.	Max.	Min.	Max.		
t_{RASS}	RAS Pulse Width During Self Refresh Cycle	100	—	100	—	μ s	1
t_{RPS}	RAS Precharge Time During Self Refresh Cycle	110	—	130	—	ns	1
t_{CHS}	CAS Hold Time During Self Refresh Cycle	-50	—	-50	—	ns	1

1. When using Self Refresh mode, the following refresh operations must be performed to ensure proper DRAM operation: If row addresses are being refreshed in an EVENLY DISTRIBUTED manner over the refresh interval using CBR refresh cycles, then only one CBR cycle must be performed immediately after exit from Self Refresh. If row addresses are being refreshed in any other manner (ROR - Distributed/Burst; or CBR-Burst) over the refresh interval, then a full set of row refreshes must be performed immediately before entry to and immediately after exit from Self Refresh.

Read

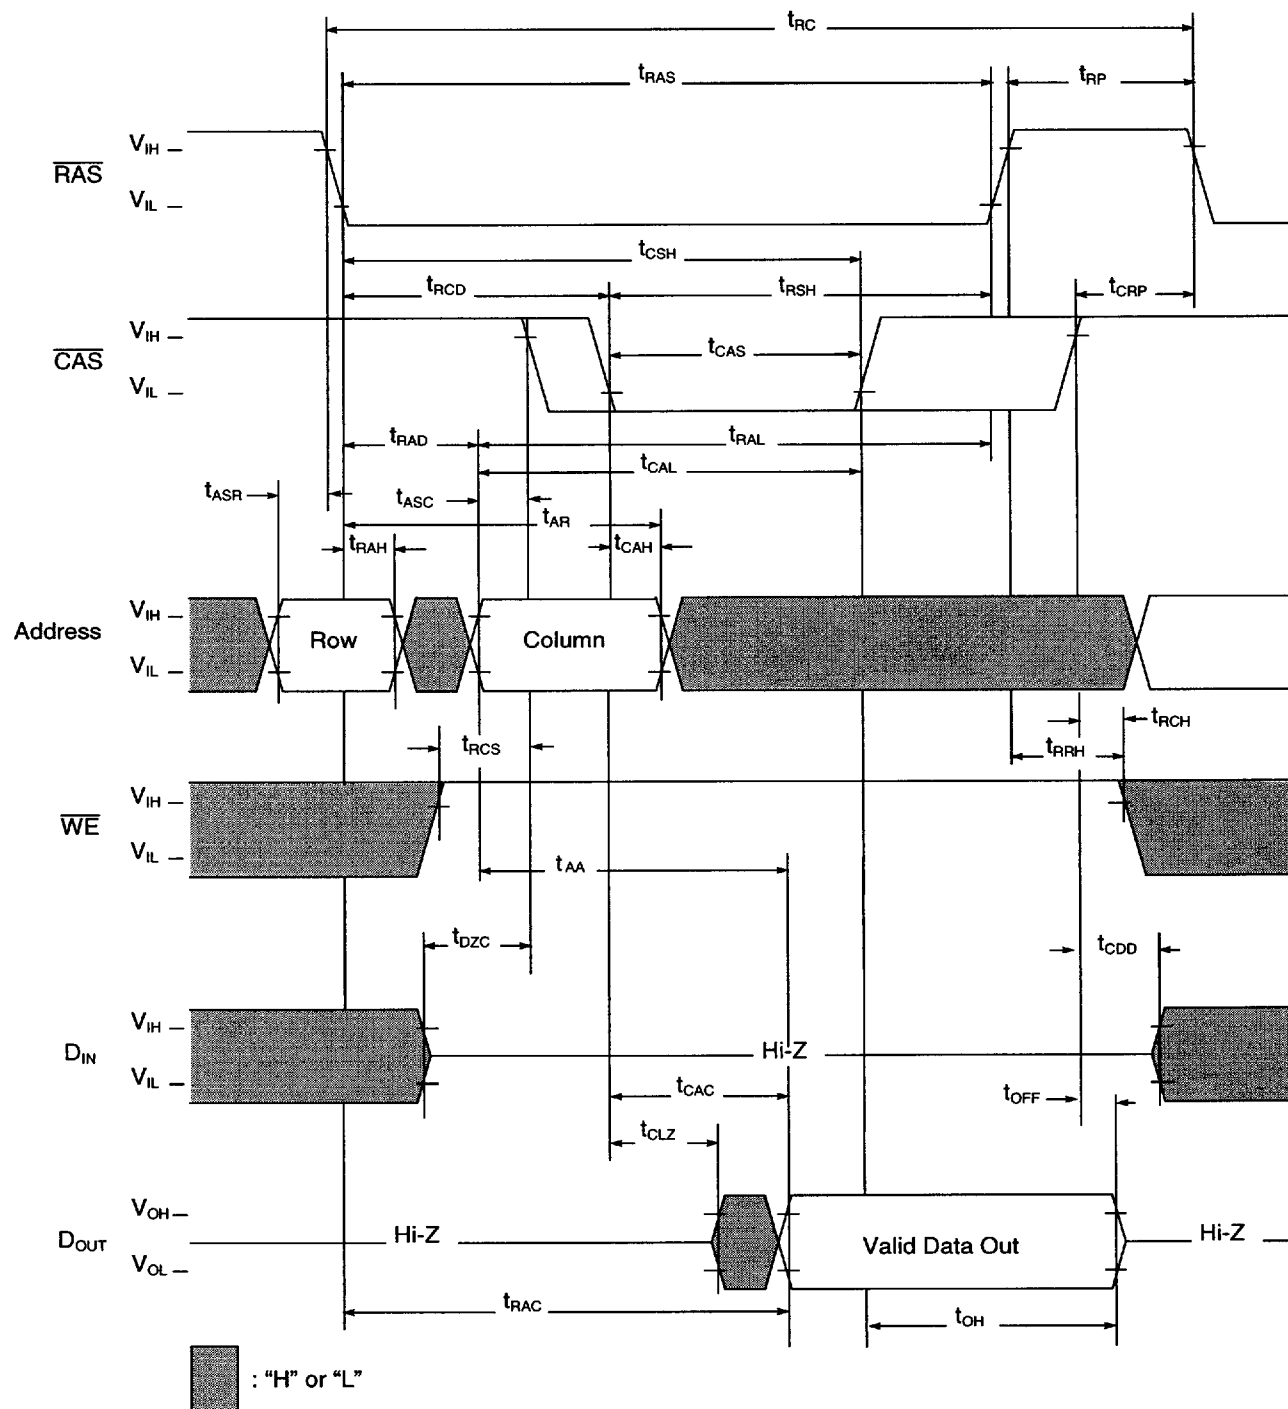


Write Cycle (Early Write)

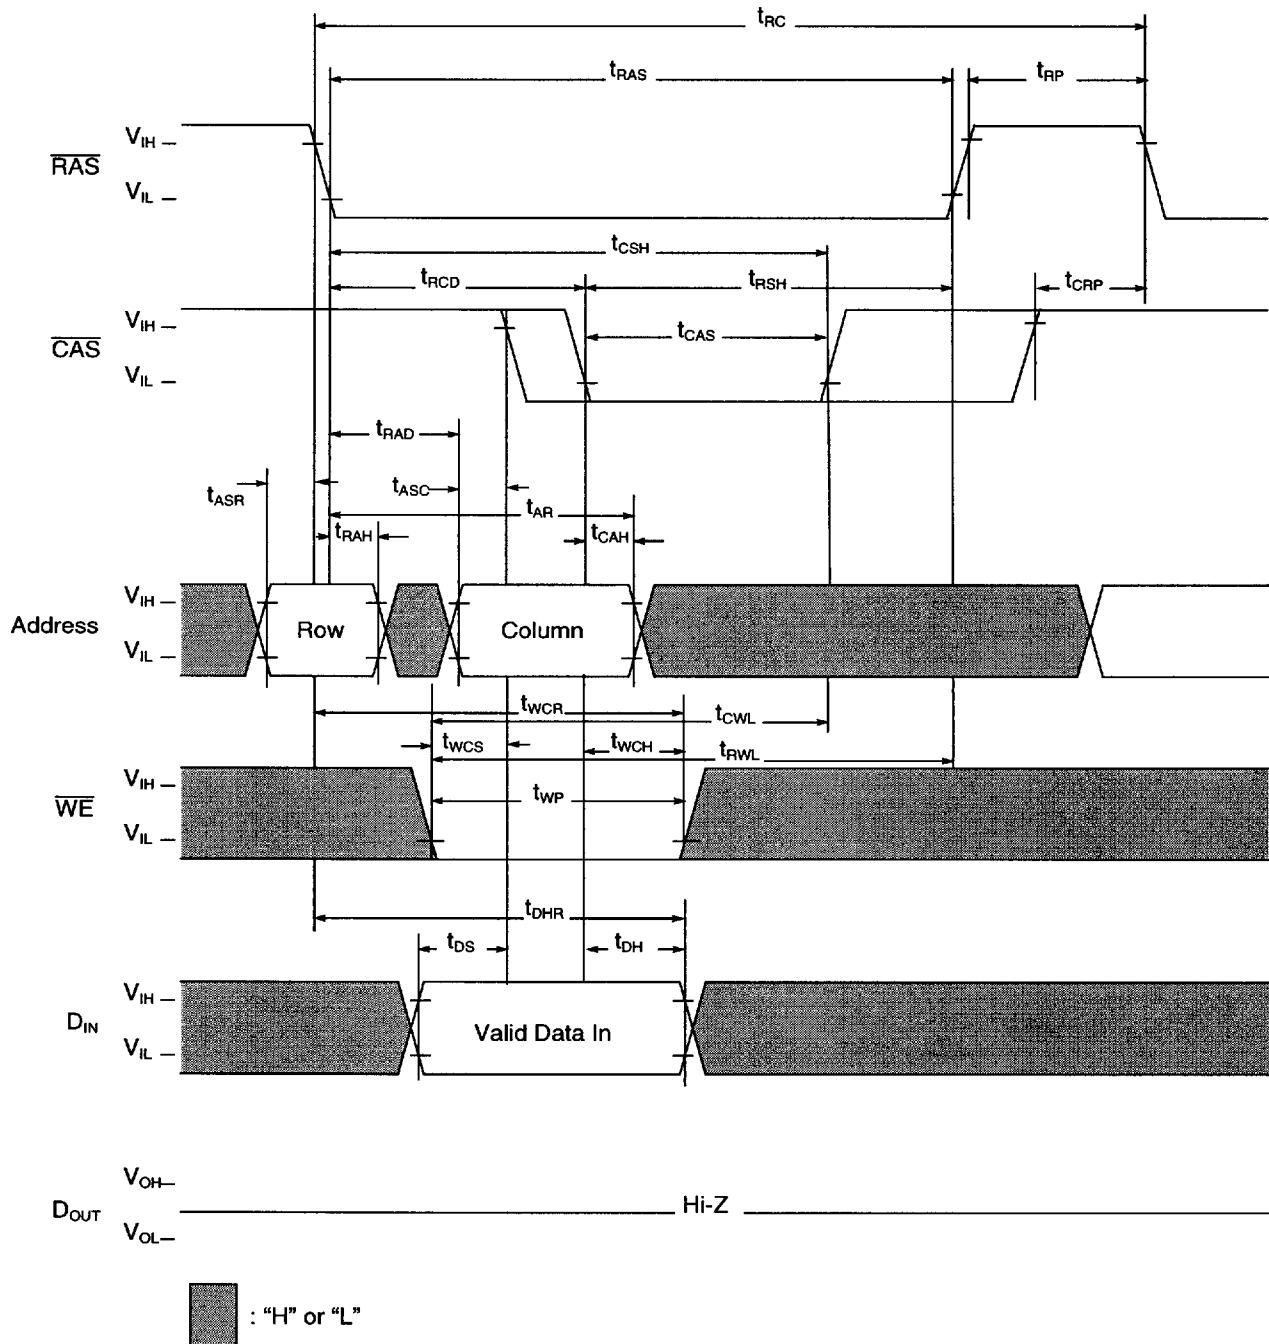


[illegible]

Fast Page Mode Write Cycle

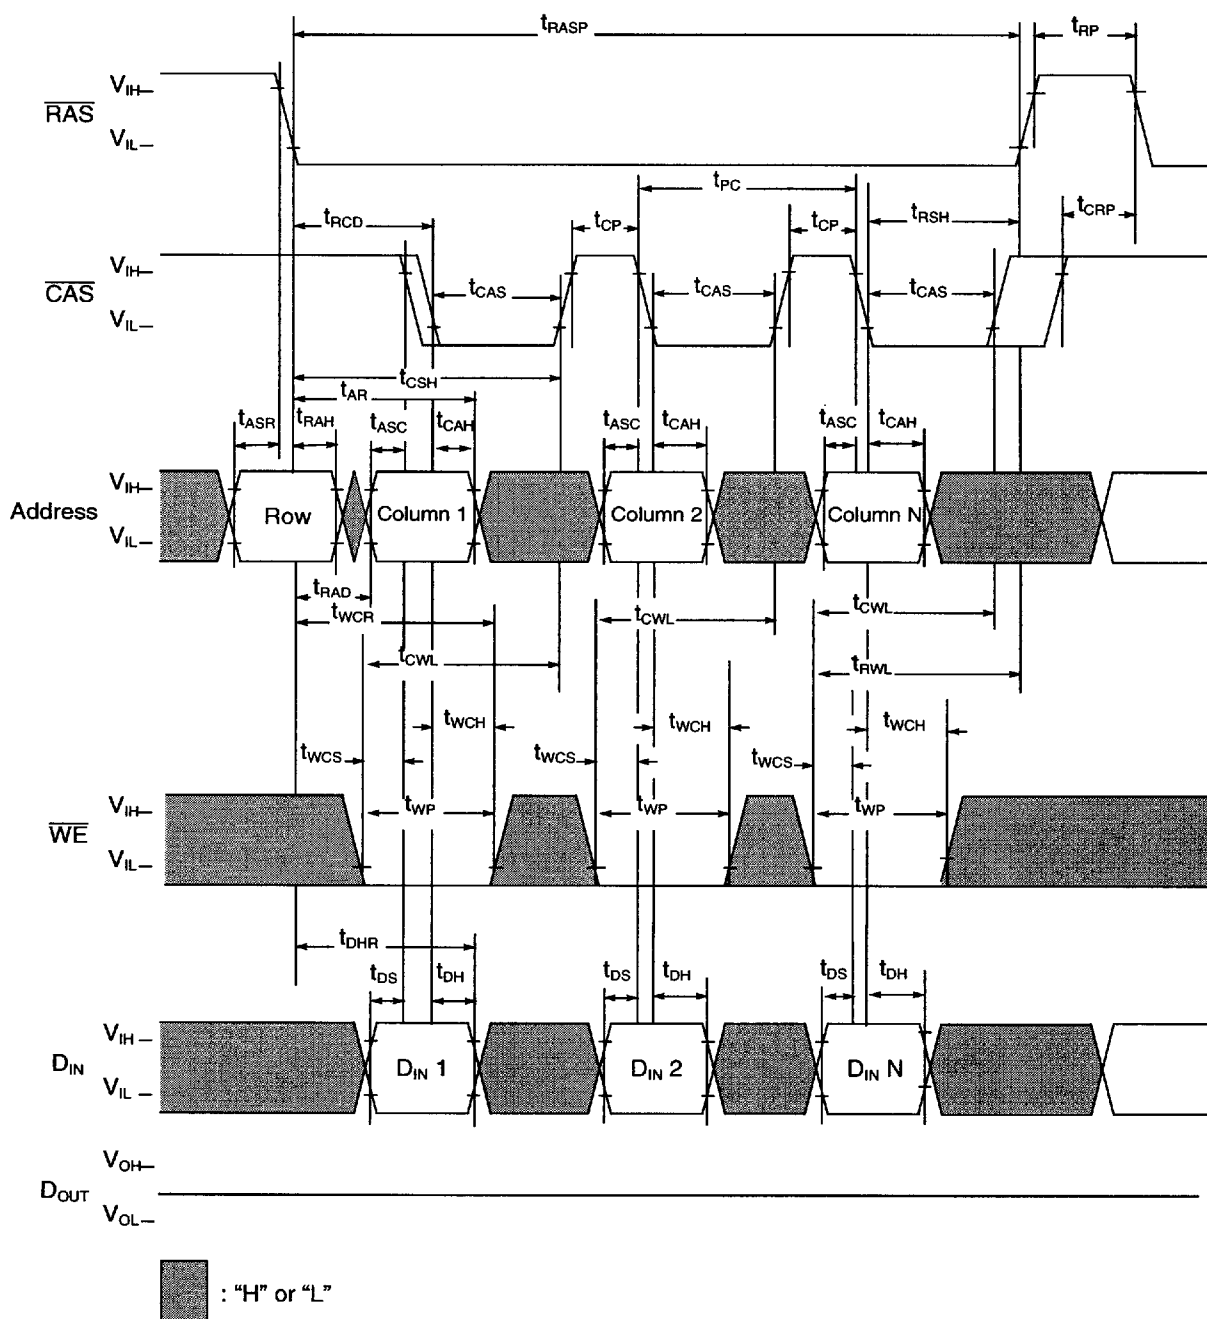


RAS Only Refresh Cycle

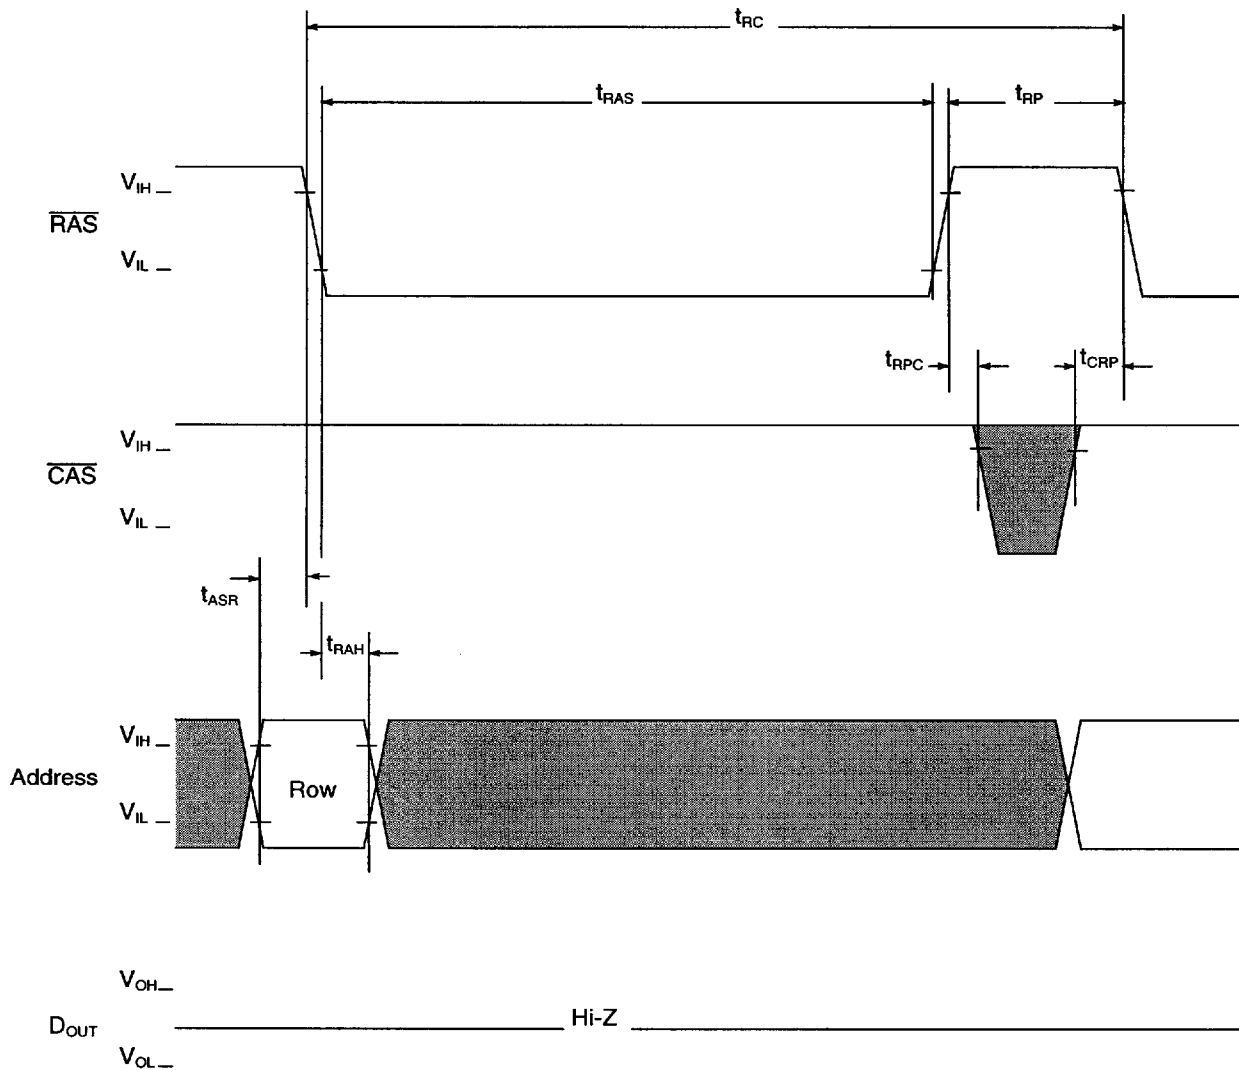


■ : "H" or "L"

Note: $\overline{\text{WE}}$, D_{IN} are "H" or "L"


Hidden Refresh Cycle (Read)

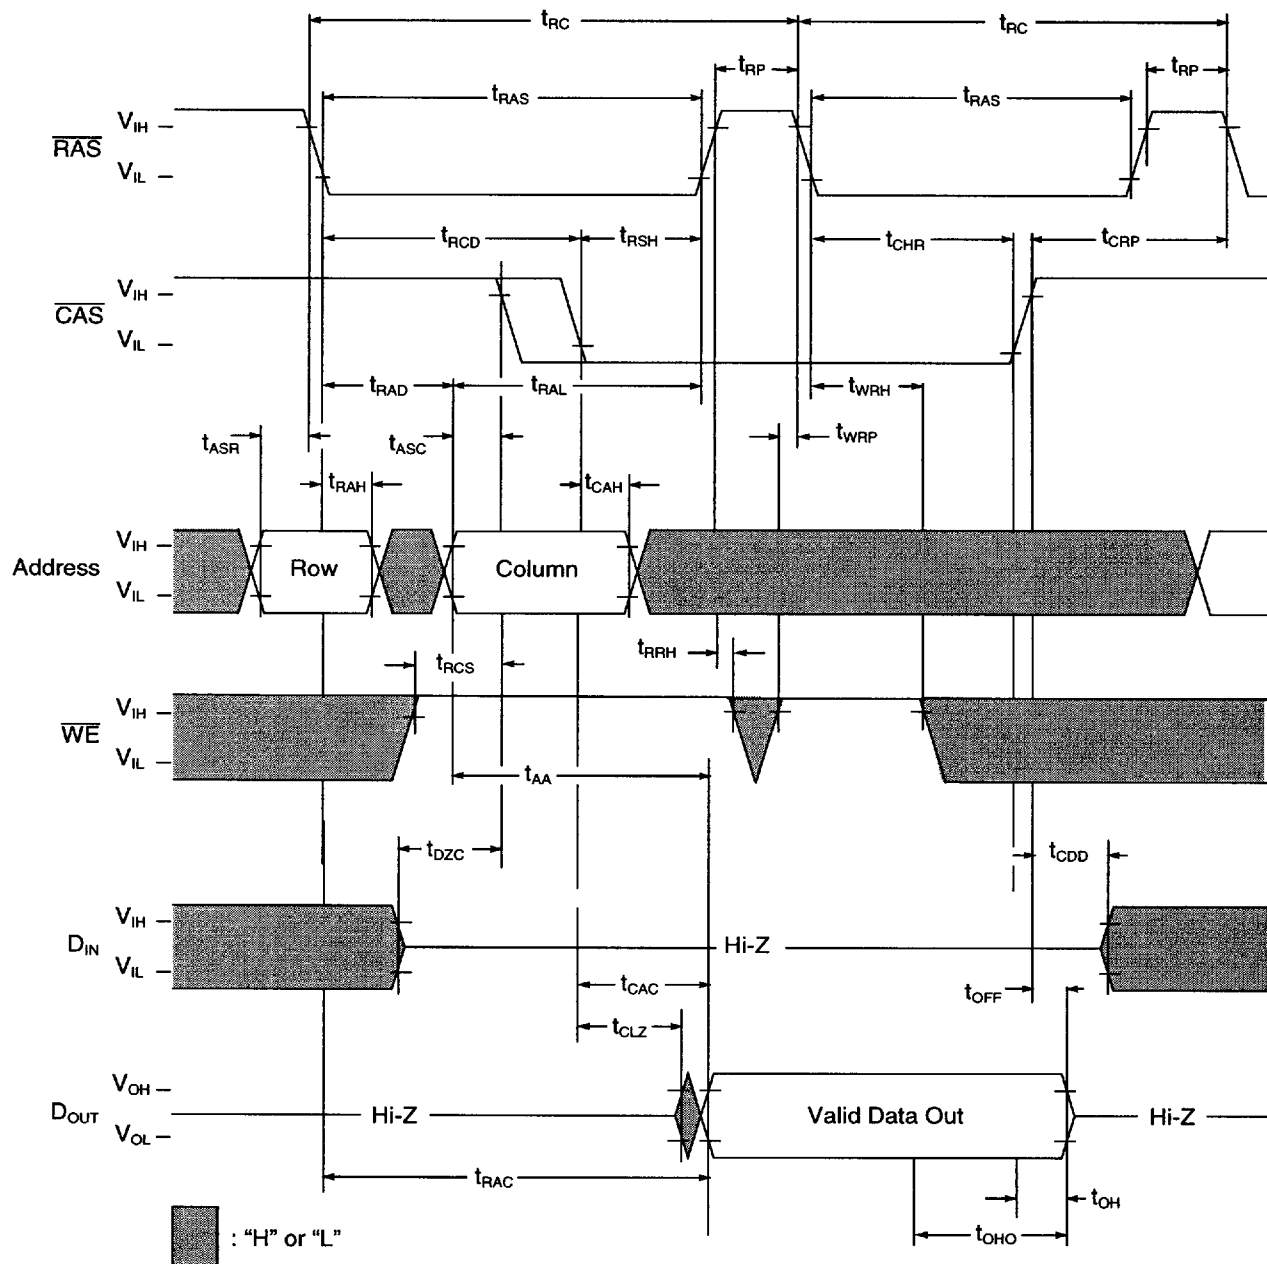

Hidden Refresh Cycle (Write)

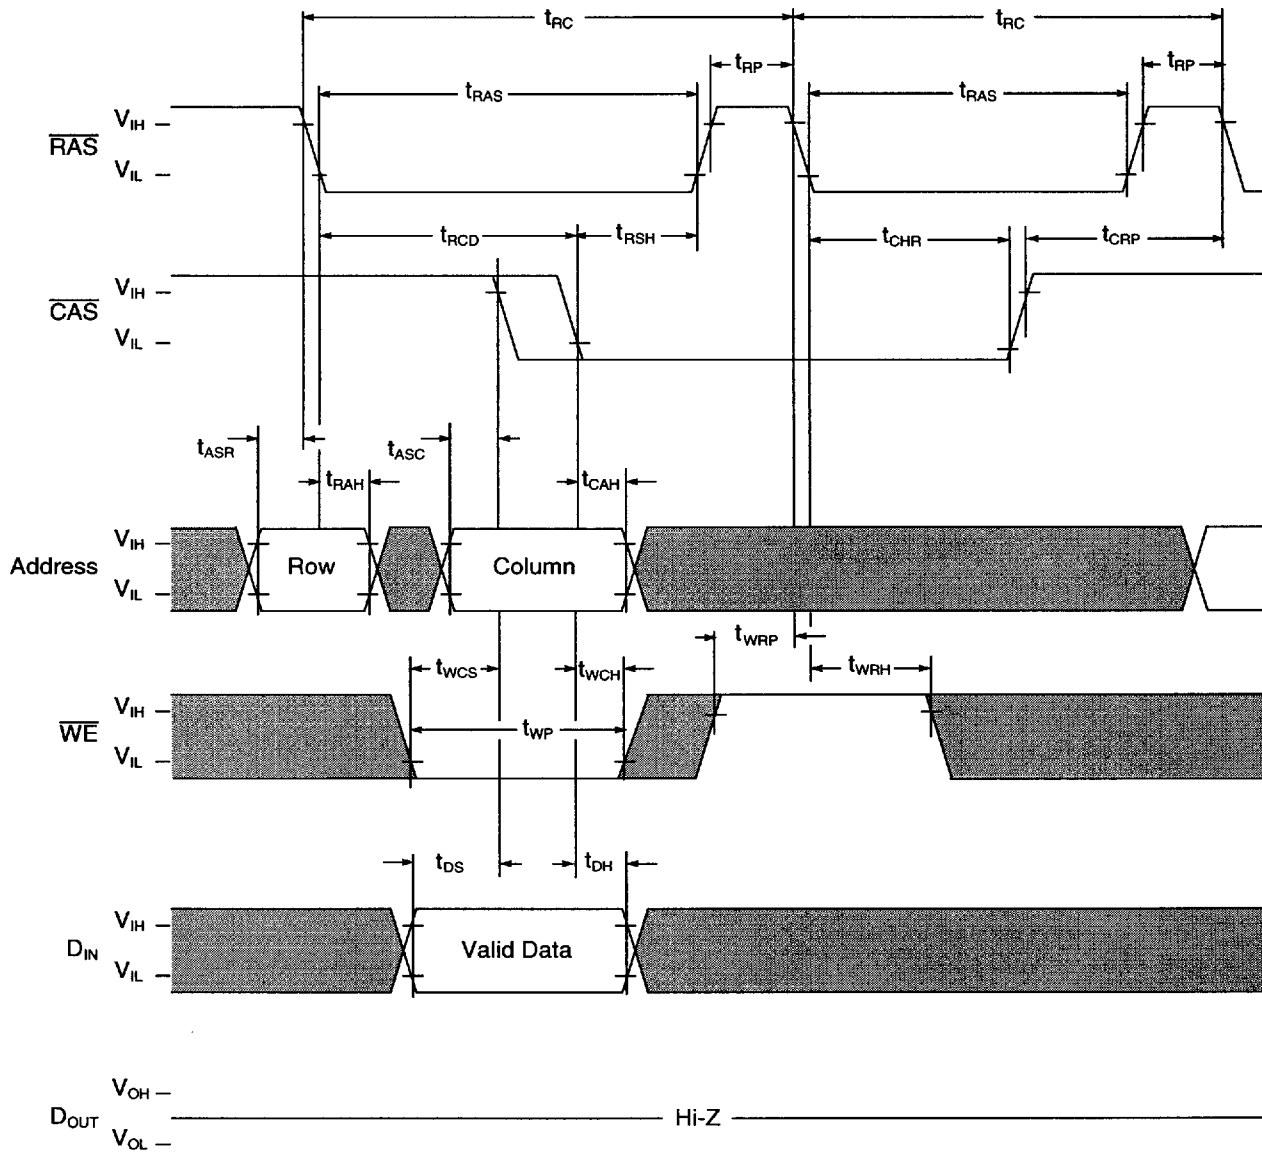

Self Refresh Cycle (Sleep Mode)

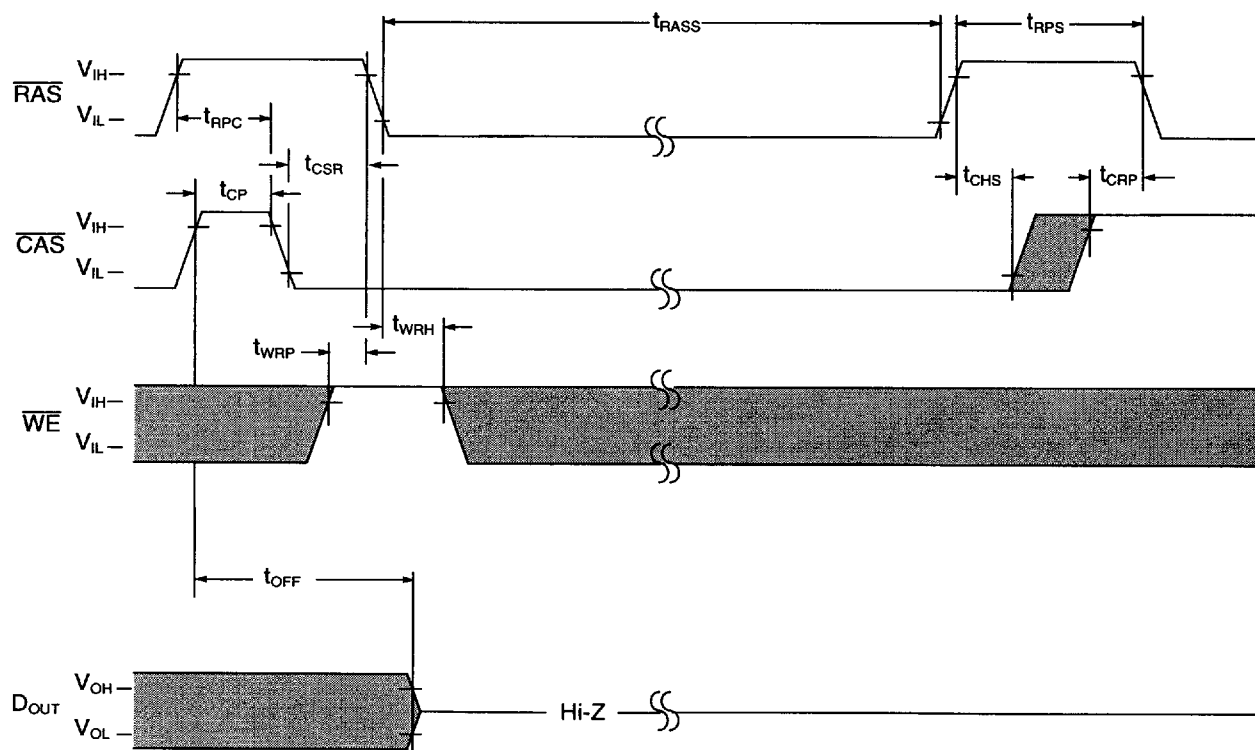


■ : "H" or "L"

NOTE: Address and OE are "H" or "L"


Once t_{RASS} (min) is provided and RAS remains low, the DRAM will be in Self Refresh, commonly known as "Sleep Mode."

CAS Before RAS Refresh Cycle

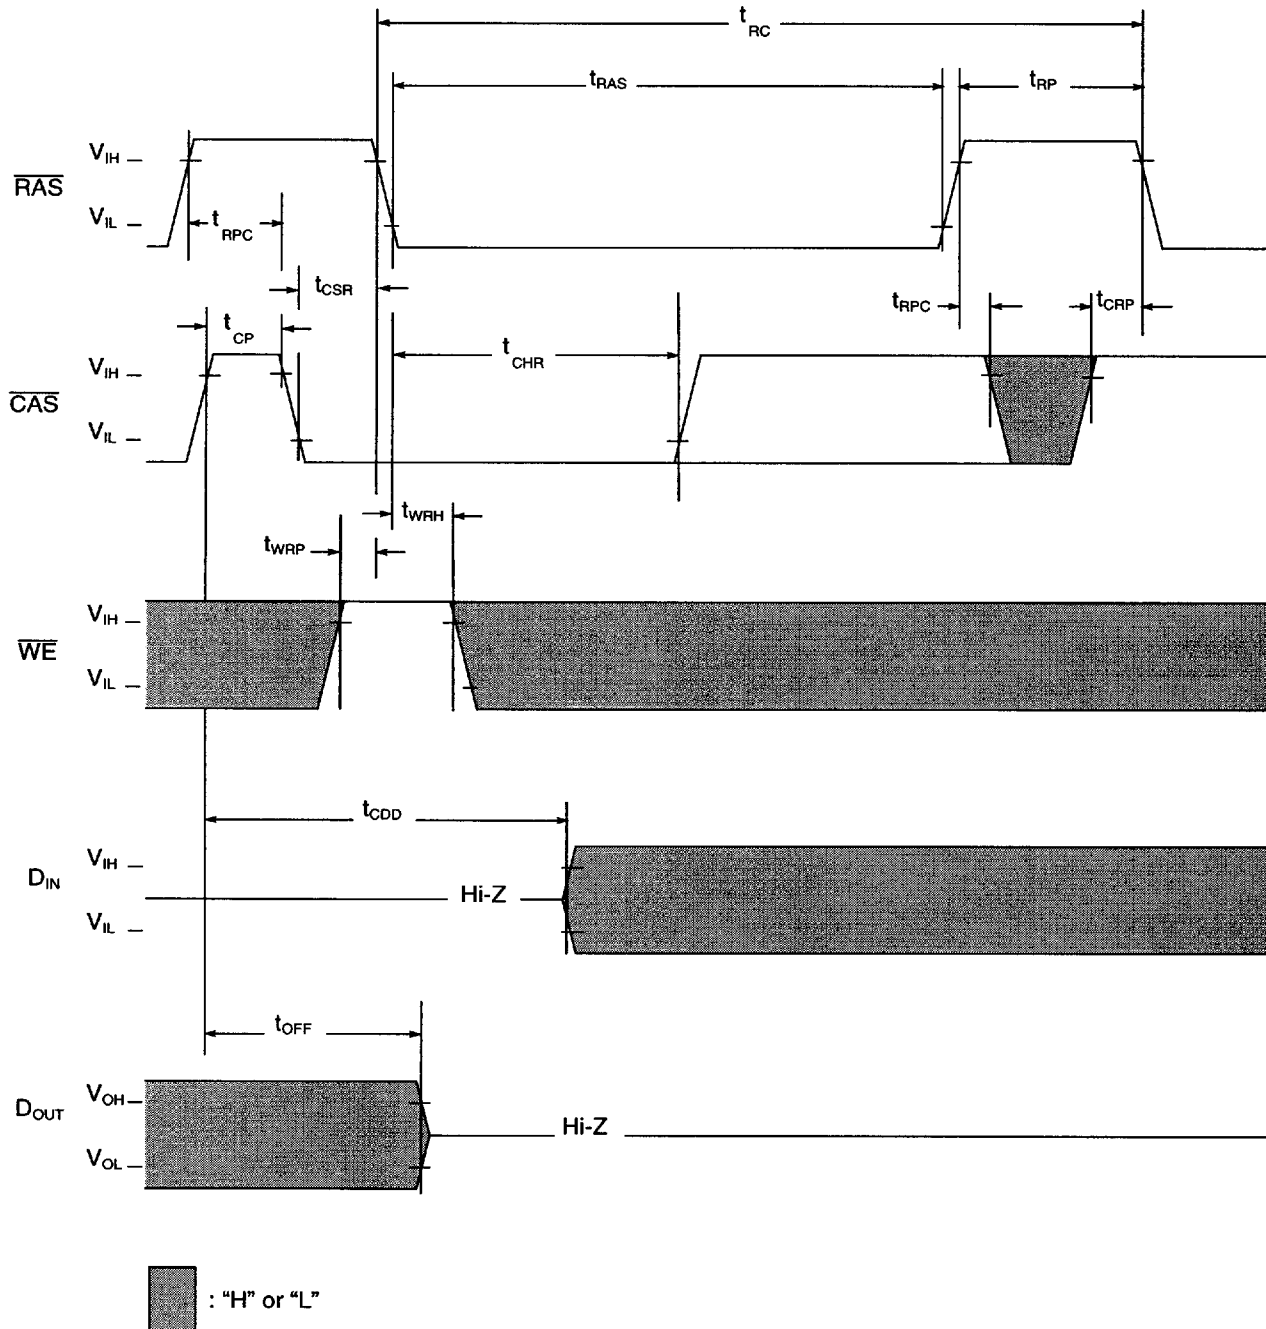

Note: Addresses are "H" or "L"

Layout Drawing

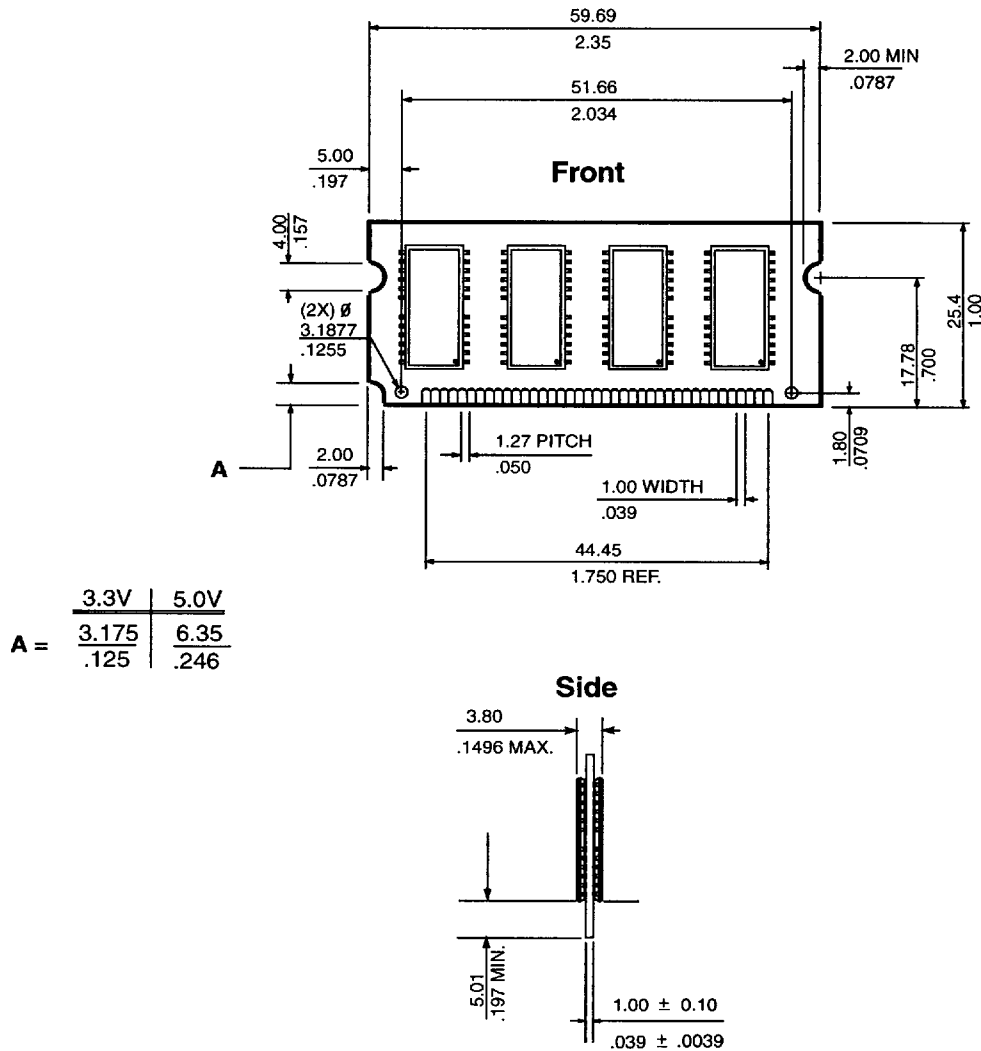

Note: All dimensions are typical unless otherwise stated.

Millimeters	Inches
1	0.039
2	0.079
3	0.118
4	0.157
5	0.197
6	0.236
7	0.276
8	0.315
9	0.354
10	0.394
11	0.433
12	0.472
13	0.512
14	0.551
15	0.591
16	0.630
17	0.669
18	0.709
19	0.748
20	0.787
22	0.866
24	0.945
25	0.984
26	1.024
28	1.103
30	1.183
32	1.262
34	1.341
36	1.421
38	1.500
40	1.579
42	1.659
44	1.738
46	1.818
48	1.897
50	1.975
52	2.055
54	2.134
56	2.213
58	2.293
60	2.372
62	2.452
64	2.531
66	2.611
68	2.690
70	2.769
72	2.849
74	2.929
76	3.008
78	3.088
80	3.168
82	3.247
84	3.327
86	3.406
88	3.485
90	3.565
92	3.645
94	3.724
96	3.804
98	3.883
100	3.963
102	4.043
104	4.122
106	4.202
108	4.281
110	4.361
112	4.440
114	4.520
116	4.599
118	4.679
120	4.758
122	4.838
124	4.917
126	5.000
128	5.079
130	5.159
132	5.238
134	5.318
136	5.397
138	5.477
140	5.556
142	5.636
144	5.715
146	5.795
148	5.875
150	5.955
152	6.034
154	6.114
156	6.193
158	6.273
160	6.353
162	6.432
164	6.512
166	6.592
168	6.671
170	6.751
172	6.831
174	6.910
176	6.990
178	7.069
180	7.149
182	7.228
184	7.308
186	7.388
188	7.467
190	7.547
192	7.627
194	7.706
196	7.786
198	7.866
200	7.945
202	8.025
204	8.104
206	8.184
208	8.264
210	8.343
212	8.423
214	8.503
216	8.582
218	8.662
220	8.742
222	8.821
224	8.901
226	8.981
228	9.060
230	9.140
232	9.220
234	9.300
236	9.379
238	9.459
240	9.538
242	9.618
244	9.698
246	9.777
248	9.857
250	9.936
252	10.016
254	10.096
256	10.175
258	10.255
260	10.335
262	10.414
264	10.494
266	10.574
268	10.653
270	10.733
272	10.813
274	10.892
276	10.972
278	11.052
280	11.131
282	11.211
28	

27H5214
SA14-4463-01
Revised 7/95

©IBM Corporation, 1995. All rights reserved.
Use is further subject to the provisions at the end of this document.

Page 19 of 20

9006146 0000704 7TO

Revision Log

Rev	Contents of Modification
12/94	Initial release of 4Mx32 specification using 4Mx4 11/11 Addressing
7/95	Update specification with Die Rev "D" information; Changed tRPC, tRC, tRPC, tCP, tRAS, tRSH; Added Hidden Refresh and Self Refresh; Corrected currents ICC1, ICC3, ICC4, ICC6; Added ICC7 ; Added Undershoot/Over-shoot note to Recommended DC Operating Condition Table.