

FU-427SLD-F1

1.3 μ m LD MODULE WITH SINGLEMODE FIBER PIGTAIL

DESCRIPTION

Module type FU-427SLD-F1 has been developed for coupling a singlemode optical fiber and a 1.3 μ m wavelength InGaAsP LD (Laser diode).

FU-427SLD-F1 is suitable to light source for high speed long haul optical communication systems and measuring instruments.

FEATURES

- High-speed response
- Emission wavelength is in 1.3 μ m band
- Low threshold current (7mA typ.)
- With photodiode for optical output monitor

APPLICATION


Trunk Line, FitL

ABSOLUTE MAXIMUM RATINGS (T_{LD} = 25 °C)

Parameter		Symbol	Conditions	Rating	Unit
Laser diode	Optical output power from fiber end	P _F	CW	3	mW
	Reverse voltage	V _{RL}	—	2	V
Photodiode for monitoring	Reverse voltage	V _{RD}	—	15	V
	Forward current	I _{FD}	—	2	mA
Operating case temperature		T _C	—	0 ~ + 75	°C
Storage temperature		T _{stg}	—	− 40 ~ + 85	°C

OUTLINE DIAGRAM

(Unit : mm)

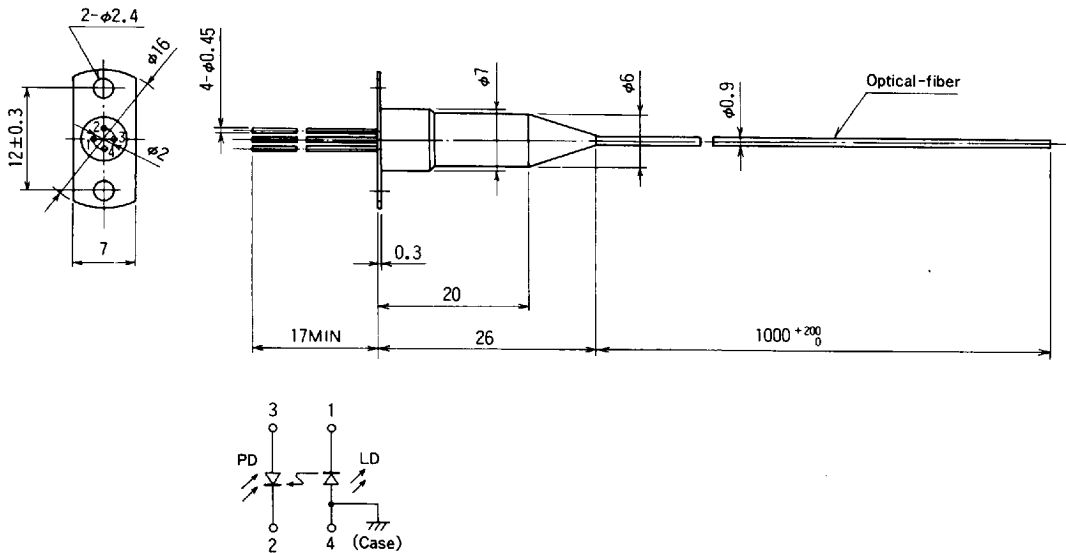

FU-427SLD-F1

FU-427SLD-F1

1.3 μm LD MODULE WITH SINGLEMODE FIBER PIGTAIL

ELECTRICAL/OPTICAL CHARACTERISTICS (TLD = 25 °C, unless otherwise noted)

Parameter	Symbol	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
Threshold current	I _{th}	CW	3	7	15	mA
Operating current	I _{OP}	CW	—	20	40	mA
Operating voltage	V _{OP}	CW, I _F = I _{OP} (Note 1)	—	1.1	1.5	V
Optical output power from fiber end	P _F	CW, I _F = I _{OP}	1	2	—	mW
Central wavelength	λ _c	CW, I _F = I _{OP}	1285	1300	1330	nm
Spectral bandwidth (RMS) (Note 3)	Δλ	CW, I _F = I _{OP}	—	1.2	4	nm
Rise and fall time	t _r , t _f	I _B = I _{th} , 10~90% (Note 2)	—	0.3	1	ns
Tracking error (Note 4)	E _r	T _c = 0~65 °C, APC	—	0.4	1.5	dB
Differential efficiency	η	—	—	0.15	—	mW/mA
Monitor current	I _{mon}	CW, I _F = I _{OP} , V _{RD} = 5V	0.1	0.6	—	mA
Dark current (Photodiode)	I _D	V _{RD} = 5V	—	0.1	0.5	μA
Capacitance (Photodiode)	C _t	V _{RD} = 5V, f = 1MHz	—	—	20	pF

- Note 1. I_F : Forward current (LD)
 2. I_B : Bias current (LD)
 3.
$$\Delta \lambda = \sqrt{\frac{\sum a_i (\lambda_i - \lambda_c)^2}{\sum a_i}}$$

 (a_i ≥ a_p × 0.01)
 a_i : Relative intensity of laser spectral emission modes
 a_p : Peak of laser spectral emission modes
 4.
$$E_r = \text{MAX} \left| 10 \cdot \log \frac{P_F}{P_F(25^\circ\text{C})} \right|$$

 * Module up to 85 °C in operating case temperature (T_c) is also available.
 Please consult with sales office about specification and so on, if necessary.

OPTICAL-FIBER SPECIFICATIONS

Parameter	Limits	Unit
Type	SM	—
Mode field dia.	10 ± 1	μm
Cladding dia.	125 ± 2	μm
Jacket dia.	0.9 typ.	mm



FU-427SLD-F1

1.3 μm LD MODULE WITH SINGLEMODE FIBER PIGTAIL

TYPICAL CHARACTERISTICS

