

μPD42S16800, 4216800, 42S17800, 4217800

16 M-BIT DYNAMIC RAM 2 M-WORD BY 8-BIT, FAST PAGE MODE

Description

The μPD42S16800, 4216800, 42S17800, 4217800 are 2 097 152 words by 8 bits dynamic CMOS RAMs. These differ in refresh cycle and the μPD42S16800, 42S17800 can execute CAS before RAS self refresh. These are packed in 28-pin plastic TSOP (II) and 28-pin plastic SOJ.

Features

- 2 097 152 words by 8 bits organization
- Single +5.0 V±10 % power supply
- Fast page mode
- Fast access and cycle time

Part number	Power consumption Active (MAX.)	Access time (MAX.)	R/W cycle time (MIN.)	Fast page mode cycle time (MIN.)
μPD42S16800-50, 4216800-50	550 mW	50 ns	90 ns	35 ns
μPD42S17800-50, 4217800-50	660 mW			
μPD42S16800-60, 4216800-60	495 mW	60 ns	110 ns	40 ns
μPD42S17800-60, 4217800-60	605 mW			
μPD42S16800-70, 4216800-70	440 mW	70 ns	130 ns	45 ns
μPD42S17800-70, 4217800-70	550 mW			

- The μPD42S16800, 42S17800 can execute $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh

Part number	Refresh cycle	Refresh	Power consumption at standby (MAX.)
μPD42S16800	4 096 cycles / 128 ms	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh, $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh, $\overline{\text{RAS}}$ only refresh, Hidden refresh	1.4 mW (CMOS level input)
μPD42S17800	2 048 cycles / 128 ms		
μPD4216800	4 096 cycles / 64 ms	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh, $\overline{\text{RAS}}$ only refresh, Hidden refresh	5.5 mW (CMOS level input)
μPD4217800	2 048 cycles / 32 ms		

The information in this document is subject to change without notice.

Ordering Information

Part number	Access time (MAX.)	Package	Refresh
μPD42S16800G5-50	50 ns	28-pin Plastic TSOP (II) (400 mil)	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh $\overline{\text{RAS}}$ only refresh Hidden refresh
μPD42S17800G5-50			
μPD42S16800G5-60	60 ns		
μPD42S17800G5-60			
μPD42S16800G5-70	70 ns		
μPD42S17800G5-70			
μPD42S16800LE-50	50 ns	28-pin Plastic SOJ (400 mil)	
μPD42S17800LE-50			
μPD42S16800LE-60	60 ns		
μPD42S17800LE-60			
μPD42S16800LE-70	70 ns		
μPD42S17800LE-70			
μPD4216800G5-50	50 ns	28-pin Plastic TSOP (II) (400 mil)	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh $\overline{\text{RAS}}$ only refresh Hidden refresh
μPD4217800G5-50			
μPD4216800G5-60	60 ns		
μPD4217800G5-60			
μPD4216800G5-70	70 ns		
μPD4217800G5-70			
μPD4216800LE-50	50 ns	28-pin Plastic SOJ (400 mil)	
μPD4217800LE-50			
μPD4216800LE-60	60 ns		
μPD4217800LE-60			
μPD4216800LE-70	70 ns		
μPD4217800LE-70			


Quality Grade

Standard


Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

Pin Configurations (Marking Side)

28-pin Plastic TSOP (II)

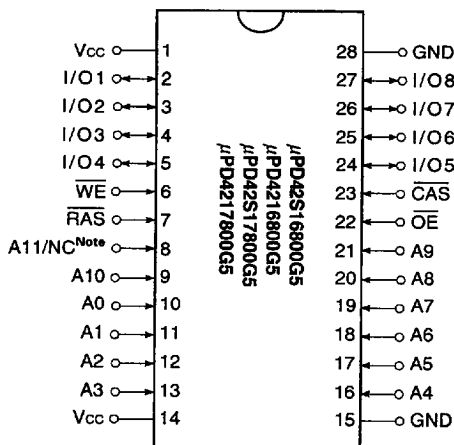


28-pin Plastic SOJ

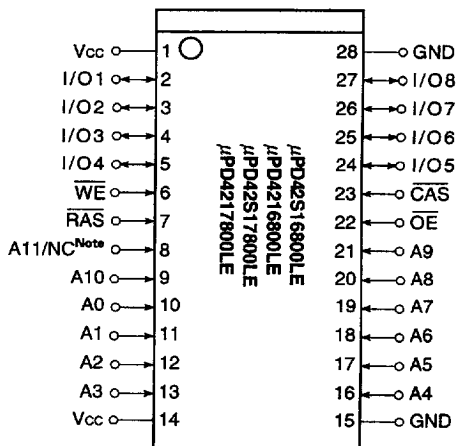

Note A11 ...μPD42S16800, 4216800
NC ...μPD42S17800, 4217800

A0 to A11 : Address inputs
I/O1 to I/O8 : Data Inputs/Outputs
RAS : Row address strobe
CAS : Column address strobe
WE : Write enable
OE : Output enable
Vcc : Power Supply
GND : Ground
NC : No connection

Block Diagram

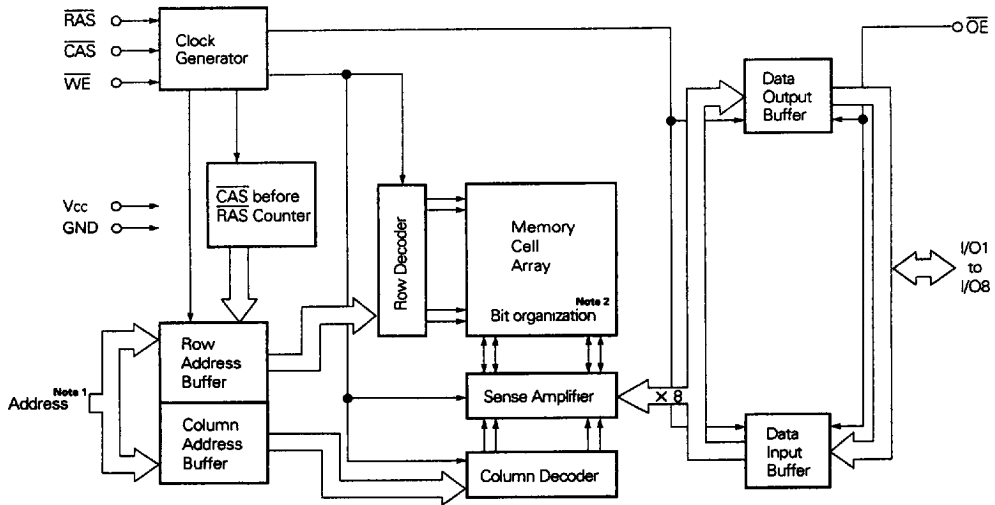

Notes 1.

Part number	Row address	Column address
μPD42S16800, 4216800	A0 to A11	A0 to A8
μPD42S17800, 4217800	A0 to A10	A0 to A9

2. μPD42S16800, 4216800...4 096×512×8

μPD42S17800, 4217800...2 048×1 024×8

Input/Output Pin Functions

The μPD42S16800, 4216800, 42S17800, 4217800 have input pins $\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OE}}$, A0 to A11/A10 ^{Note1} and input/output pins I/O1 to I/O8.

Pin name	Input/ Output	Function
$\overline{\text{RAS}}$ (Row address strobe)	Input	$\overline{\text{RAS}}$ activates the sense amplifier by latching a row address and selecting a corresponding word line. It refreshes memory cell array of one line selected by the row address. It also selects the following function. • $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh
$\overline{\text{CAS}}$ (Column address strobe)		$\overline{\text{CAS}}$ activates data input/output circuit by latching column address and selecting a digit line connected with the sense amplifier.
A0 to A11/A10 ^{Note1} (Address inputs)		Address bus. Input total 21-bit of address signal, upper 12/11 ^{Note2} -bit and lower 9/10 ^{Note2} -bit in sequence (address multiplex method). Therefore, one word is selected from 2 097 152-word by 8-bit memory cell array. In actual operation, latch row address by specifying row address and activating $\overline{\text{RAS}}$. Then, switch the address bus to column address and activate $\overline{\text{CAS}}$. Each address is taken into the device when $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ are activated. Therefore, the address input setup time (t_{ASR} , t_{ASC}) and hold time (t_{RAH} , t_{CAH}) are specified for the activation of $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$.
$\overline{\text{WE}}$ (Write enable)		Write control signal. Write operation is executed by activating $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ and $\overline{\text{WE}}$.
$\overline{\text{OE}}$ (Output enable)		Read control signal. Read operation can be executed by activating $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ and $\overline{\text{OE}}$. If $\overline{\text{WE}}$ is activated during read operation, $\overline{\text{OE}}$ is to be ineffective in the device. Therefore, read operation cannot be executed.
I/O1 to I/O8 (Data inputs/outputs)	Input/ Output	8-bit data bus. I/O1 to I/O8 are used to input/output data.

Notes 1. A11 ... μPD42S16800, 4216800 A10 ... μPD42S17800, 4217800
2. 12 ... μPD42S16800, 4216800 11 ... μPD42S17800, 4217800
3. 9 ... μPD42S16800, 4216800 10 ... μPD42S17800, 4217800

Electrical Specifications

- All voltages are referenced to GND.
- After power up, wait more than 100 μ s and then, execute eight $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ or $\overline{\text{RAS}}$ only refresh cycles as dummy cycles to initialize internal circuit.

Absolute Maximum Ratings

Parameter	Symbol	Condition	Rating	Unit
Voltage on Any Pin Relative to GND	V_T		-1.0 to +7.0	V
Supply Voltage	V_{CC}		-1.0 to +7.0	V
Output Current	I_O		50	mA
Power Dissipation	P_D		1	W
Operating Temperature	T_{opt}		0 to +70	°C
Storage Temperature	T_{stg}		-55 to +125	°C

Caution Exposing the device to stress above those listed in Absolute Maximum Ratings could cause permanent damage. The device is not meant to be operated under conditions outside the limits described in the operational section of this specification. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Supply Voltage	V_{CC}		4.5	5.0	5.5	V
High Level Input Voltage	V_{IH}		2.4		$V_{CC} + 1.0$	V
Low Level Input Voltage	V_{IL}		-1.0		+0.8	V
Ambient Temperature	T_a		0		70	°C

Capacitance ($T_a = 25^\circ\text{C}$, $f = 1\text{ MHz}$)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Input Capacitance	C_{I1}	Address			5	pF
	C_{I2}	$\overline{\text{RAS}}$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OE}}$			7	pF
Data Input/Output Capacitance	$C_{I/O}$	I/O			7	pF

DC Characteristics (Recommended Operating Conditions unless otherwise noted)[μ PD42S16800, 4216800]

Parameter		Symbol	Test condition		MIN.	MAX.	Unit	Notes
Operating current		I _{cc1}	$\overline{\text{RAS}}, \overline{\text{CAS}}$ Cycling $\text{trC} = \text{trC}(\text{MIN.})$ $\text{I}_\text{O} = 0 \text{ mA}$	$\text{trAC} = 50 \text{ ns}$		100	mA	1,2,3
				$\text{trAC} = 60 \text{ ns}$		90		
				$\text{trAC} = 70 \text{ ns}$		80		
Standby current	$\mu\text{PD42S16800}$	I _{cc2}	$\overline{\text{RAS}}, \overline{\text{CAS}} \geq \text{V}_{\text{IH}}(\text{MIN.})$	$\text{I}_\text{O} = 0 \text{ mA}$		2	mA	
	$\mu\text{PD4216800}$		$\overline{\text{RAS}}, \overline{\text{CAS}} \geq \text{V}_{\text{CC}} - 0.2 \text{ V}$	$\text{I}_\text{O} = 0 \text{ mA}$		0.25		
			$\overline{\text{RAS}}, \overline{\text{CAS}} \geq \text{V}_{\text{IH}}(\text{MIN.})$	$\text{I}_\text{O} = 0 \text{ mA}$		2		
			$\overline{\text{RAS}}, \overline{\text{CAS}} \geq \text{V}_{\text{CC}} - 0.2 \text{ V}$	$\text{I}_\text{O} = 0 \text{ mA}$		1		
$\overline{\text{RAS}}$ only refresh current		I _{cc3}	$\overline{\text{RAS}}$ Cycling $\overline{\text{CAS}} \geq \text{V}_{\text{IH}}(\text{MIN.})$ $\text{trC} = \text{trC}(\text{MIN.})$ $\text{I}_\text{O} = 0 \text{ mA}$	$\text{trAC} = 50 \text{ ns}$		100	mA	1,2,3,4
				$\text{trAC} = 60 \text{ ns}$		90		
				$\text{trAC} = 70 \text{ ns}$		80		
Operating current (Fast page mode)		I _{cc4}	$\overline{\text{RAS}} \leq \text{V}_{\text{IL}}(\text{MAX.})$ $\overline{\text{CAS}}$ Cycling $\text{trC} = \text{trC}(\text{MIN.})$ $\text{I}_\text{O} = 0 \text{ mA}$	$\text{trAC} = 50 \text{ ns}$		80	mA	1,2,5
				$\text{trAC} = 60 \text{ ns}$		70		
				$\text{trAC} = 70 \text{ ns}$		60		
$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh current		I _{cc5}	$\overline{\text{RAS}}$ Cycling $\text{trC} = \text{trC}(\text{MIN.})$ $\text{I}_\text{O} = 0 \text{ mA}$	$\text{trAC} = 50 \text{ ns}$		100	mA	1,2
				$\text{trAC} = 60 \text{ ns}$		90		
				$\text{trAC} = 70 \text{ ns}$		80		
$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ long refresh current (4 096 cycles / 128 ms, only for $\mu\text{PD42S16800}$)		I _{cc6}	$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh : 4 096 cycles/128 ms $\overline{\text{RAS}}, \overline{\text{CAS}} : 0 \text{ V} \leq \text{V}_{\text{IL}} \leq 0.2 \text{ V}$ $\text{V}_{\text{CC}} - 0.2 \text{ V} \leq \text{V}_{\text{IH}} \leq \text{V}_{\text{IH}(\text{MAX.})}$ Standby : $\overline{\text{RAS}} \geq \text{V}_{\text{CC}} - 0.2 \text{ V}$ Address : Don't care $\overline{\text{WE}}, \overline{\text{OE}} : \text{V}_{\text{IH}}$ $\text{I}_\text{O} = 0 \text{ mA}$	$\text{trAS} \leq 300 \text{ ns}$		450	μA	1,2
				$\text{trAS} \leq 1 \mu\text{s}$		600		
Self refresh current ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh, only for $\mu\text{PD42S16800}$)		I _{cc7}	$\overline{\text{RAS}}, \overline{\text{CAS}} : 0 \text{ V} \leq \text{V}_{\text{IL}} \leq 0.2 \text{ V}$ $\text{V}_{\text{CC}} - 0.2 \text{ V} \leq \text{V}_{\text{IH}} \leq \text{V}_{\text{IH}}(\text{MAX.})$ $\text{I}_\text{O} = 0 \text{ mA}$			250	μA	2
Input leakage current		I _{I (L)}	$\text{V}_\text{I} = 0 \text{ to } 5.5 \text{ V}$ all other pins not under test = 0 V		-10	+10	μA	
Output leakage current		I _{O (L)}	$\text{V}_\text{O} = 0 \text{ to } 5.5 \text{ V}$ Output is disabled (Hi-Z)		-10	+10	μA	
High level output voltage		V _{OH}	$\text{I}_\text{O} = -5.0 \text{ mA}$		2.4		V	
Low level output voltage		V _{OL}	$\text{I}_\text{O} = +4.2 \text{ mA}$			0.4	V	

[μ PD42S17800, 4217800]


Parameter		Symbol	Test condition	MIN.	MAX.	Unit	Notes
Operating current		I _{CC1}	$\overline{RAS}$, $\overline{CAS}$ Cycling		120	mA	1,2,3
			$t_{RC} = t_{RC(MIN.)}$		110		
			$I_O = 0$ mA		100		
Standby current	μ PD42S17800	I _{CC2}	$\overline{RAS}$, $\overline{CAS} \geq V_{IH(MIN.)}$	$I_O = 0$ mA	2	mA	
			$\overline{RAS}$, $\overline{CAS} \geq V_{CC} - 0.2$ V	$I_O = 0$ mA	0.25		
	μ PD4217800		$\overline{RAS}$, $\overline{CAS} \geq V_{IH(MIN.)}$	$I_O = 0$ mA	2		
			$\overline{RAS}$, $\overline{CAS} \geq V_{CC} - 0.2$ V	$I_O = 0$ mA	1		
$\overline{RAS}$ only refresh current		I _{CC3}	$\overline{RAS}$ Cycling	$t_{RAC} = 50$ ns	120	mA	1,2,3,4
			$\overline{CAS} \geq V_{IH(MIN.)}$	$t_{RAC} = 60$ ns	110		
			$t_{RC} = t_{RC(MIN.)}$	$t_{RAC} = 70$ ns	100		
			$I_O = 0$ mA				
Operating current (Fast page mode)		I _{CC4}	$\overline{RAS} \leq V_{IL(MAX.)}$	$t_{RAC} = 50$ ns	80	mA	1,2,5
			$\overline{CAS}$ Cycling	$t_{RAC} = 60$ ns	70		
			$t_{PC} = t_{PC(MIN.)}$	$t_{RAC} = 70$ ns	60		
			$I_O = 0$ mA				
$\overline{CAS}$ before $\overline{RAS}$ refresh current		I _{CC5}	$\overline{RAS}$ Cycling	$t_{RAC} = 50$ ns	120	mA	1,2
			$t_{RC} = t_{RC(MIN.)}$	$t_{RAC} = 60$ ns	110		
			$I_O = 0$ mA	$t_{RAC} = 70$ ns	100		
$\overline{CAS}$ before $\overline{RAS}$ long refresh current (2 048 cycles / 128 ms, only for μ PD42S17800)		I _{CC6}	$\overline{CAS}$ before $\overline{RAS}$ refresh : 2 048 cycles/128 ms $\overline{RAS}$, $\overline{CAS} : 0$ V $\leq V_{IL} \leq 0.2$ V $V_{CC}-0.2$ V $\leq V_{IH} \leq V_{IH(MAX.)}$	$t_{RAS} \leq 300$ ns	400	μ A	1,2
			Standby : $\overline{RAS} \geq V_{CC}-0.2$ V Address : Don't care $\overline{WE}$, $\overline{OE} : V_{IH}$ $I_O = 0$ mA	$t_{RAS} \leq 1$ μ s	500		
Self refresh current ($\overline{CAS}$ before $\overline{RAS}$ self refresh, only for μ PD42S17800)		I _{CC7}	$\overline{RAS}$, $\overline{CAS} : 0$ V $\leq V_{IL} \leq 0.2$ V $V_{CC}-0.2$ V $\leq V_{IH} \leq V_{IH(MAX.)}$ $I_O = 0$ mA		250	μ A	2
Input leakage current		I _{I(L)}	$V_I = 0$ to 5.5 V all other pins not under test = 0 V	-10	+10	μ A	
Output leakage current		I _{O(L)}	$V_O = 0$ to 5.5 V Output is disabled (Hi-Z)	-10	+10	μ A	
High level output voltage		V _{OH}	$I_O = -5.0$ mA	2.4		V	
Low level output voltage		V _{OL}	$I_O = +4.2$ mA		0.4	V	

- Notes**
1. I_{CC1}, I_{CC3}, I_{CC4}, I_{CC5} and I_{CC6} depend on cycle rates (t_{RC} and t_{PC}).
 2. Specified values are obtained with outputs unloaded.
 3. I_{CC1} and I_{CC3} are measured assuming that address can be changed once or less during $\overline{RAS} \leq V_{IL(MAX.)}$ and $\overline{CAS} \geq V_{IH(MIN.)}$.
 4. I_{CC3} is measured assuming that all column address inputs are held at either high or low.
 5. I_{CC4} is measured assuming that all column address inputs are switched only once during each fast page cycle.


AC Characteristics (Recommended Operating Conditions unless otherwise noted)

AC Characteristics Test Conditions

(1) Input timing specification

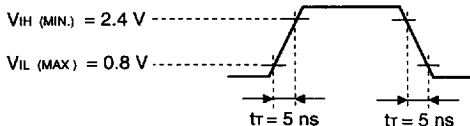

(2) Output timing specification



(3) Loading conditions are 100 pF + 2 TTL.

Common to Read, Write, Read Modify Write Cycle

Parameter		Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Notes
			MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Read / Write Cycle Time		t _{RC}	90	–	110	–	130	–	ns	
RAS Precharge Time		t _{RP}	30	–	40	–	50	–	ns	
CAS Precharge Time		t _{CPN}	8	–	10	–	10	–	ns	
RAS Pulse Width		t _{RAS}	50	10 000	60	10 000	70	10 000	ns	
CAS Pulse Width		t _{CAS}	13	10 000	15	10 000	18	10 000	ns	
RAS Hold Time		t _{RSH}	13	–	15	–	18	–	ns	
CAS Hold Time		t _{CSH}	50	–	60	–	70	–	ns	
RAS to CAS Delay Time		t _{RCD}	18	32	20	45	20	50	ns	1
RAS to Column Address Delay Time		t _{RAD}	13	25	15	30	15	35	ns	1
CAS to RAS Precharge Time		t _{CRP}	5	–	5	–	5	–	ns	2
Row Address Setup Time		t _{ASR}	0	–	0	–	0	–	ns	
Row Address Hold Time		t _{RAH}	8	–	10	–	10	–	ns	
Column Address Setup Time		t _{ASC}	0	–	0	–	0	–	ns	
Column Address Hold Time		t _{CAH}	13	–	15	–	15	–	ns	
OE Lead Time Referenced to RAS		t _{OES}	0	–	0	–	0	–	ns	
CAS to Data Setup Time		t _{CLZ}	0	–	0	–	0	–	ns	
OE to Data Setup Time		t _{OLZ}	0	–	0	–	0	–	ns	
OE to Data Delay Time		t _{OED}	10	–	13	–	15	–	ns	
Transition Time (Rise and Fall)		t _T	3	50	3	50	3	50	ns	
Refresh Time	μPD42S16800, 42S17800	t _{REF}	–	128	–	128	–	128	ms	3
	μPD4216800		–	64	–	64	–	64	ms	
	μPD4217800		–	32	–	32	–	32	ms	

Notes 1. For read cycles, access time is defined as follows:

Input Conditions	Access Time	Access Time from $\overline{\text{RAS}}$
$\text{trAD} \leq \text{trAD (MAX.)}$ and $\text{trCD} \leq \text{trCD (MAX.)}$	trAC (MAX.)	trAC (MAX.)
$\text{trAD} > \text{trAD (MAX.)}$ and $\text{trCD} \leq \text{trCD (MAX.)}$	tAA (MAX.)	$\text{trAD} + \text{tAA (MAX.)}$
$\text{trCD} > \text{trCD (MAX.)}$	tCAC (MAX.)	$\text{trCD} + \text{tCAC (MAX.)}$

trAD (MAX.) and trCD (MAX.) are specified as reference points only ; they are not restrictive operating parameters. They are used to determine which access time (trAC , tAA or tCAC) is to be used for finding out when output data will be available. Therefore, the input conditions $\text{trAD} \geq \text{trAD (MAX.)}$ and $\text{trCD} \geq \text{trCD (MAX.)}$ will not cause any operation problems.

- tCRP (MIN.) requirement is applied to $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ cycles.
- This specification is applied only to the μPD42S16800, 42S17800.

Read Cycle

Parameter	Symbol	$\text{trAC} = 50 \text{ ns}$		$\text{trAC} = 60 \text{ ns}$		$\text{trAC} = 70 \text{ ns}$		Unit	Notes
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Access Time from $\overline{\text{RAS}}$	trAC	-	50	-	60	-	70	ns	1
Access Time from $\overline{\text{CAS}}$	tCAC	-	13	-	15	-	18	ns	1
Access Time from Column Address	tAA	-	25	-	30	-	35	ns	1
Access Time from $\overline{\text{OE}}$	tOEA	-	13	-	15	-	18	ns	
Column Address Lead Time Referenced to $\overline{\text{RAS}}$	trAL	25	-	30	-	35	-	ns	
Read Command Setup Time	trCS	0	-	0	-	0	-	ns	
Read Command Hold Time Referenced to $\overline{\text{RAS}}$	trRH	0	-	0	-	0	-	ns	2
Read Command Hold Time Referenced to $\overline{\text{CAS}}$	trCH	0	-	0	-	0	-	ns	2
Output Buffer Turn-off Delay Time from $\overline{\text{OE}}$	toEZ	0	10	0	13	0	15	ns	3
Output Buffer Turn-off Delay Time from $\overline{\text{CAS}}$	toFF	0	10	0	13	0	15	ns	3

Notes 1. For read cycles, access time is defined as follows:

Input Conditions	Access Time	Access Time from $\overline{\text{RAS}}$
$\text{trAD} \leq \text{trAD (MAX.)}$ and $\text{trCD} \leq \text{trCD (MAX.)}$	trAC (MAX.)	trAC (MAX.)
$\text{trAD} > \text{trAD (MAX.)}$ and $\text{trCD} \leq \text{trCD (MAX.)}$	tAA (MAX.)	$\text{trAD} + \text{tAA (MAX.)}$
$\text{trCD} > \text{trCD (MAX.)}$	tCAC (MAX.)	$\text{trCD} + \text{tCAC (MAX.)}$

trAD (MAX.) and trCD (MAX.) are specified as reference points only ; they are not restrictive operating parameters. They are used to determine which access time (trAC , tAA or tCAC) is to be used for finding out when output data will be available. Therefore, the input conditions $\text{trAD} \geq \text{trAD (MAX.)}$ and $\text{trCD} \geq \text{trCD (MAX.)}$ will not cause any operation problems.

- Either trCH (MIN.) or trRH (MIN.) should be met in read cycles.
- toFF (MAX.) and toEZ (MAX.) define the time when the output achieves the condition of Hi - Z and is not referenced to V_{OH} or V_{OL} .

Write Cycle

Parameter	Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Notes
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
$\overline{WE}$ Hold Time Referenced to $\overline{CAS}$	twch	8	–	10	–	10	–	ns	1
$\overline{WE}$ Pulse Width	twp	8	–	10	–	10	–	ns	1
$\overline{WE}$ Lead Time Referenced to $\overline{RAS}$	trwl	18	–	20	–	20	–	ns	
$\overline{WE}$ Lead Time Referenced to $\overline{CAS}$	tcwl	13	–	15	–	15	–	ns	
$\overline{WE}$ Setup Time	twcs	0	–	0	–	0	–	ns	2
$\overline{OE}$ Hold Time	toeh	0	–	0	–	0	–	ns	
Data-in Setup Time	t _{ds}	0	–	0	–	0	–	ns	3
Data-in Hold Time	t _{dh}	10	–	10	–	15	–	ns	3

- Notes**
1. t_{w_P(MIN.)} is applied to late write cycles or read modify write cycles. In early write cycles, t_{w_{CH}(MIN.)} should be met.
 2. If t_{w_{CS}} ≥ t_{w_{CS}(MIN.)}, the cycle is an early write cycle and the data out will remain Hi - Z through the entire cycle.
 3. t_{ds}(MIN.) and t_{dh}(MIN.) are referenced to the $\overline{CAS}$ falling edge in early write cycles. In late write cycles and read modify write cycles, they are referenced to the $\overline{WE}$ falling edge.

Read Modify Write Cycle

Parameter	Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Note
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Read Modify Write Cycle Time	trwc	140	–	160	–	180	–	ns	
$\overline{RAS}$ to $\overline{WE}$ Delay Time	trwd	70	–	83	–	95	–	ns	1
$\overline{CAS}$ to $\overline{WE}$ Delay Time	tcwd	33	–	38	–	43	–	ns	1
Column Address to $\overline{WE}$ Delay Time	tawd	45	–	53	–	60	–	ns	1

- Note**
1. If t_{w_{CS}} ≥ t_{w_{CS}(MIN.)}, the cycle is an early write cycle and the data out will remain Hi - Z through the entire cycle. If t_{trwd} ≥ t_{trwd}(MIN.), t_{tcwd} ≥ t_{tcwd}(MIN.), t_{tawd} ≥ t_{tawd}(MIN.) and t_{tcpwd} ≥ t_{tcpwd}(MIN.), the cycle is a read modify write cycle and the data out will contain data read from the selected cell. If neither of the above conditions is met, the state of the data out is indeterminate.

Fast Page Mode

Parameter	Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Note
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
Fast Page Mode Cycle Time	t _{PC}	35	—	40	—	45	—	ns	
Access Time from $\overline{\text{CAS}}$ Precharge	t _{ACP}	—	30	—	35	—	40	ns	
$\overline{\text{RAS}}$ Pulse Width	t _{RASP}	50	125 000	60	125 000	70	125 000	ns	
$\overline{\text{CAS}}$ Precharge Time	t _{CP}	8	—	10	—	10	—	ns	
$\overline{\text{RAS}}$ Hold Time from $\overline{\text{CAS}}$ Precharge	t _{RHCP}	30	—	35	—	40	—	ns	
Read Modify Write Cycle Time	t _{PRWC}	80	—	85	—	90	—	ns	
$\overline{\text{CAS}}$ Precharge to $\overline{\text{WE}}$ Delay Time	t _{CPWD}	50	—	58	—	65	—	ns	1


Note 1. If $\text{twcs} \geq \text{twcs}(\text{MIN.})$, the cycle is an early write cycle and the data out will remain Hi - Z through the entire cycle. If $\text{trwd} \geq \text{trwd}(\text{MIN.})$, $\text{tcwd} \geq \text{tcwd}(\text{MIN.})$, $\text{tawd} \geq \text{tawd}(\text{MIN.})$ and $\text{tcpwd} \geq \text{tcpwd}(\text{MIN.})$, the cycle is a read modify write cycle and the data out will contain data read from the selected cell. If neither of the above conditions is met, the state of the data out is indeterminate.

Refresh Cycle


Parameter	Symbol	t _{RAC} = 50 ns		t _{RAC} = 60 ns		t _{RAC} = 70 ns		Unit	Note
		MIN.	MAX.	MIN.	MAX.	MIN.	MAX.		
$\overline{\text{CAS}}$ Setup Time	t _{CSR}	5	—	5	—	5	—	ns	
$\overline{\text{CAS}}$ Hold Time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ Refresh)	t _{CHR}	10	—	10	—	10	—	ns	
$\overline{\text{RAS}}$ Precharge $\overline{\text{CAS}}$ Hold Time	t _{RPC}	5	—	5	—	5	—	ns	
$\overline{\text{RAS}}$ Pulse Width ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ Self Refresh Cycle)	t _{RASS}	100	—	100	—	100	—	μs	1
$\overline{\text{RAS}}$ Precharge Time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ Self Refresh Cycle)	t _{RPS}	90	—	110	—	130	—	ns	1
$\overline{\text{CAS}}$ Hold Time ($\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ Self Refresh Cycle)	t _{CHS}	—50	—	—50	—	—50	—	ns	1
$\overline{\text{WE}}$ Setup Time	t _{WSR}	10	—	10	—	10	—	ns	
$\overline{\text{WE}}$ Hold Time	t _{WHR}	15	—	15	—	15	—	ns	

Note 1. This specification is applied only to the μPD42S16800, 42S17800.

Read Cycle

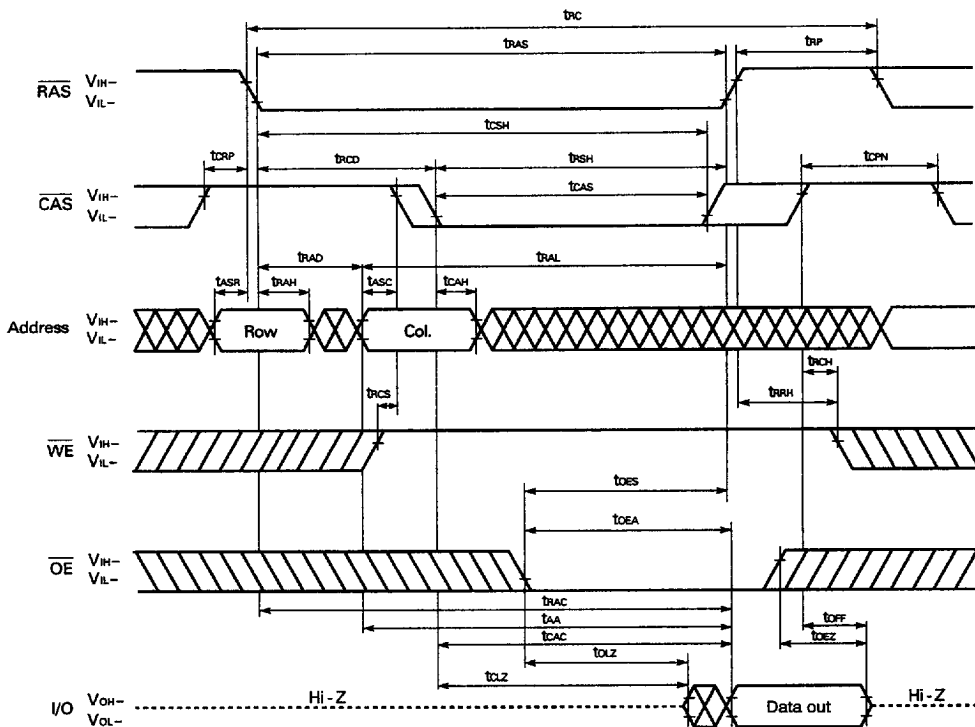

Early Write Cycle

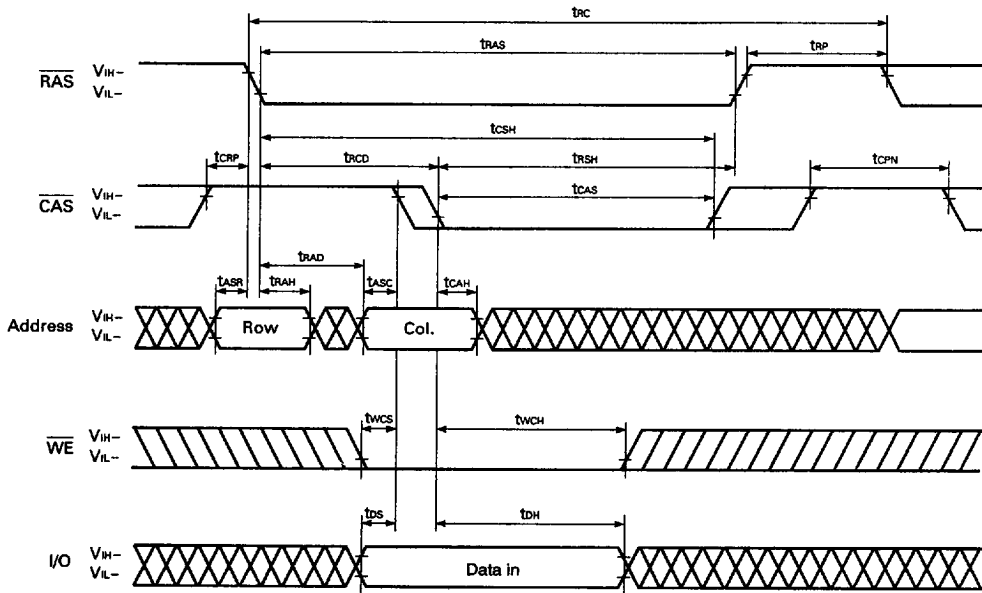


Remark $\overline{OE}$: Don't care

The timing diagram illustrates the relationship between several control and data signals for the 28C02 EPROM. The signals shown are:


- RAS**: Row Address Strobe, active low. Timing parameters include t_{RAS} (pulse width), t_{RPH} (pulse height), t_{CSH} (setup time before CAS), and t_{CPH} (hold time after CAS).
- CAS**: Column Address Strobe, active low. Timing parameters include t_{CRP} (setup time before RAS), t_{CD} (delay from RAS to output), t_{CSH} (setup time before RAS), t_{CAS} (pulse width), and t_{CPH} (hold time after RAS).
- Address**: Consists of Row and Column address inputs. Timing parameters include t_{ASR} (setup time before RAS), t_{RAH} (hold time after RAS), t_{ASC} (setup time before CAS), t_{CAH} (hold time after CAS), t_{OWL} (output delay from Row), and t_{BWL} (output delay from Column).
- WE**: Write Enable, active low. Timing parameters include t_{RCS} (setup time before RAS), t_{WP} (pulse width), and t_{OEH} (output delay from WE).
- OE**: Output Enable, active low. Timing parameters include t_{OEH} (output delay from OE), t_{OED} (output delay from OE), t_{OS} (output delay from OE), and t_{OH} (output delay from OE).
- I/O**: Data bus. Timing parameters include t_{OED} (output delay from OE), t_{OS} (output delay from OE), and t_{OH} (output delay from OE).

The diagram also shows the data bus state during Row and Column address periods, with "Hi-Z" indicating high-impedance state.

Read Modify Write Cycle

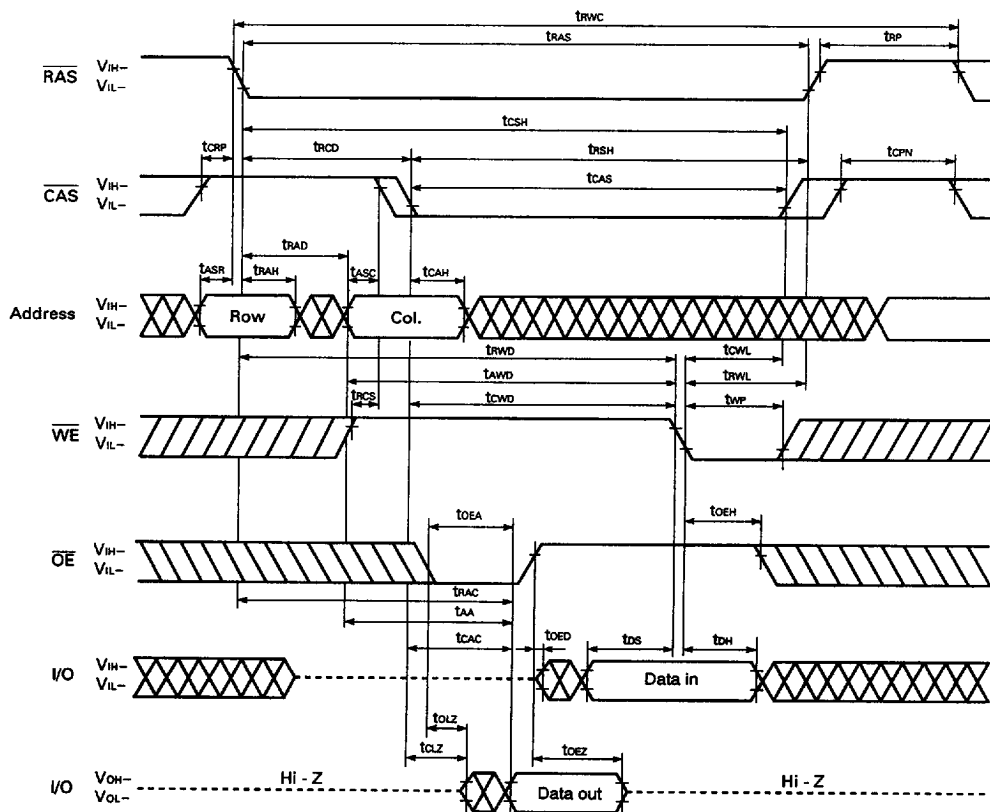


Fast Page Mode Read Cycle

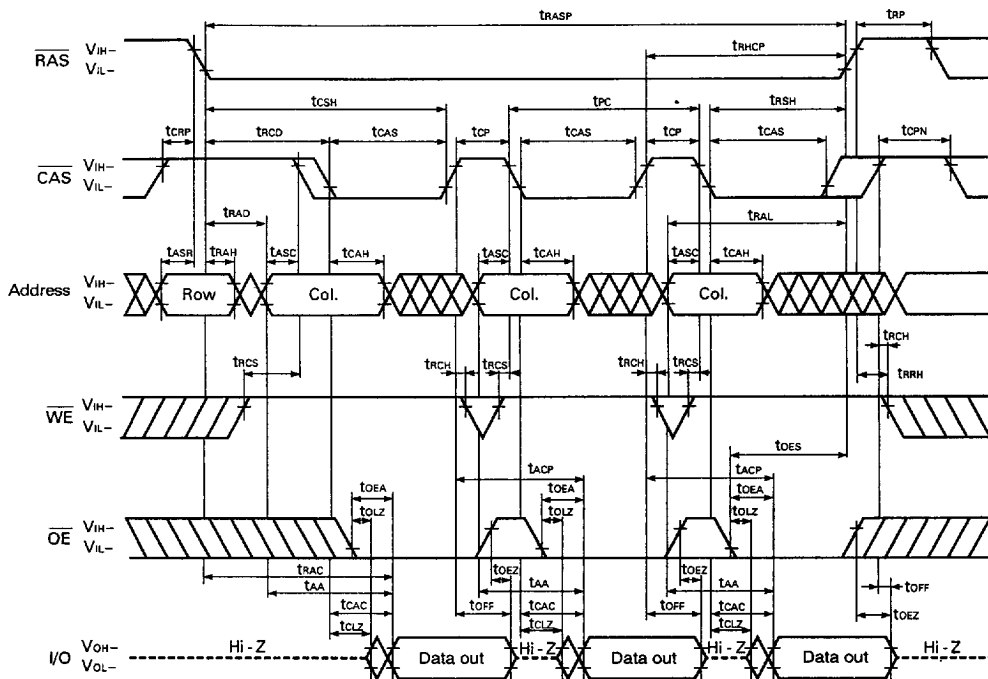

Remark In the fast page mode, read, write and read modify write cycles are available for each of the consecutive $\overline{\text{CAS}}$ cycles within the same $\overline{\text{RAS}}$ cycle.

Fast Page Mode Late Write Cycle

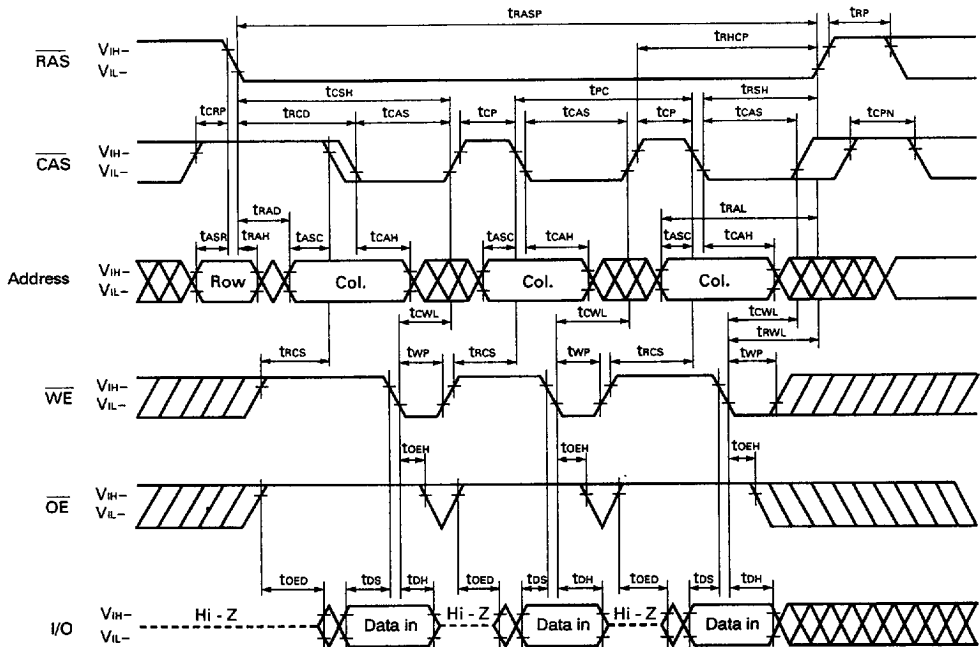


Remark In the fast page mode, read, write and read modify write cycles are available for each of the consecutive CAS cycles within the same RAS cycle.

[illegible]

6427525 0057179 BT1

$\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Self Refresh Cycle (Only for the μ PD42S16800, 42S17800)

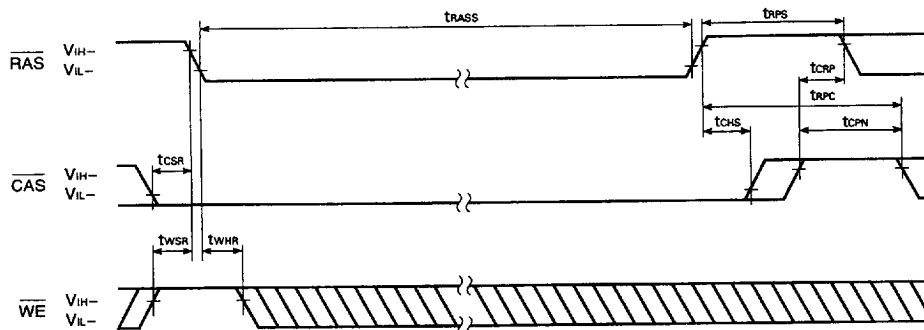

Remark Address, $\overline{\text{OE}}$: Don't care I/O : Hi - Z

Cautions on Use of $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Self Refresh

$\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh can be used independently when used in combination with distributed $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ long refresh; However, when used in combination with burst $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ long refresh or with burst long $\overline{\text{RAS}}$ only refresh, the following cautions must be observed.

(1) Normal Combined Use of $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Self Refresh and Burst $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Long Refresh

When $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh and burst $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ long refresh are used in combination, please perform $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh as follows just before and after setting $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh.

μ PD42S16800 : 4 096 times within a 64 ms interval

μ PD42S17800 : 2 048 times within a 32 ms interval

(2) Normal Combined Use of $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Self Refresh and Burst Long $\overline{\text{RAS}}$ Only Refresh


When $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh and burst $\overline{\text{RAS}}$ only refresh are used in combination, please perform $\overline{\text{RAS}}$ only refresh as follows just before and after setting $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ self refresh.

μ PD42S16800 : 4 096 times within a 64 ms interval

μ PD42S17800 : 2 048 times within a 32 ms interval


For details, please refer to **How to use DRAM** User's Manual.

CAS Before RAS Refresh Cycle

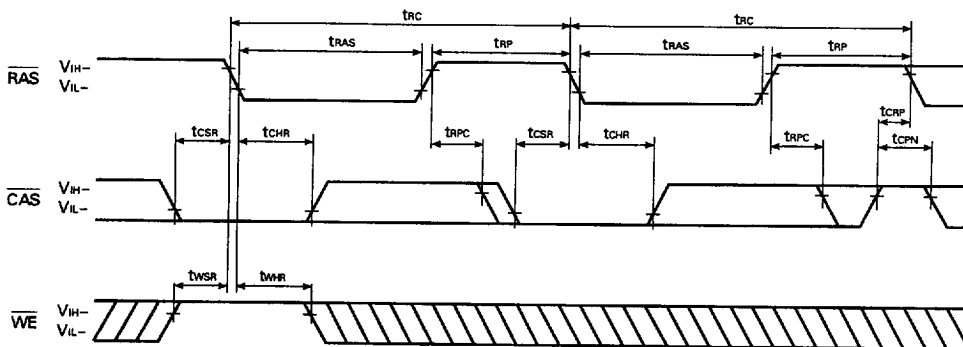


Remark Address, $\overline{OE}$: Don't care I/O : Hi - Z

RAS Only Refresh Cycle

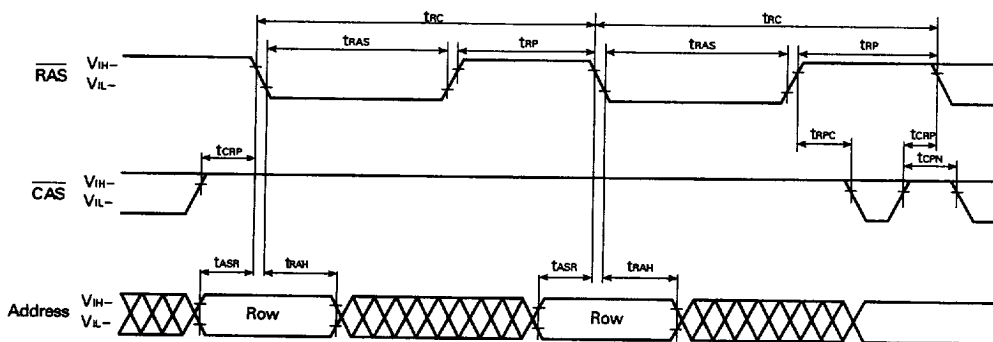


Remark $\overline{WE}$, $\overline{OE}$: Don't care I/O : Hi - Z

Hidden Refresh Cycle (Read)

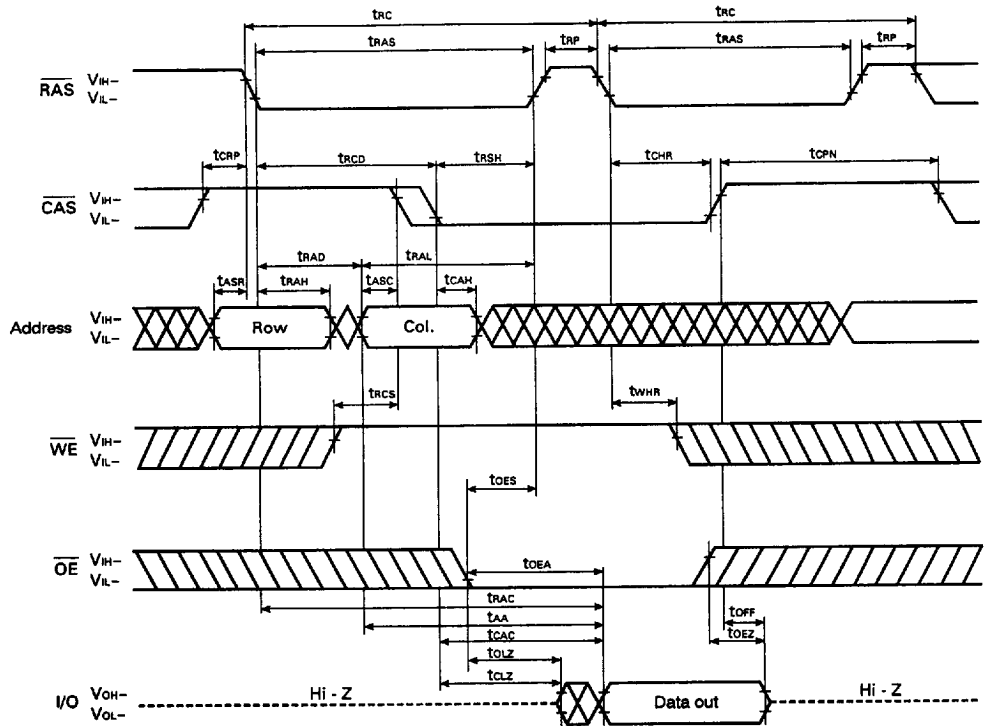


Hidden Refresh Cycle (Write)

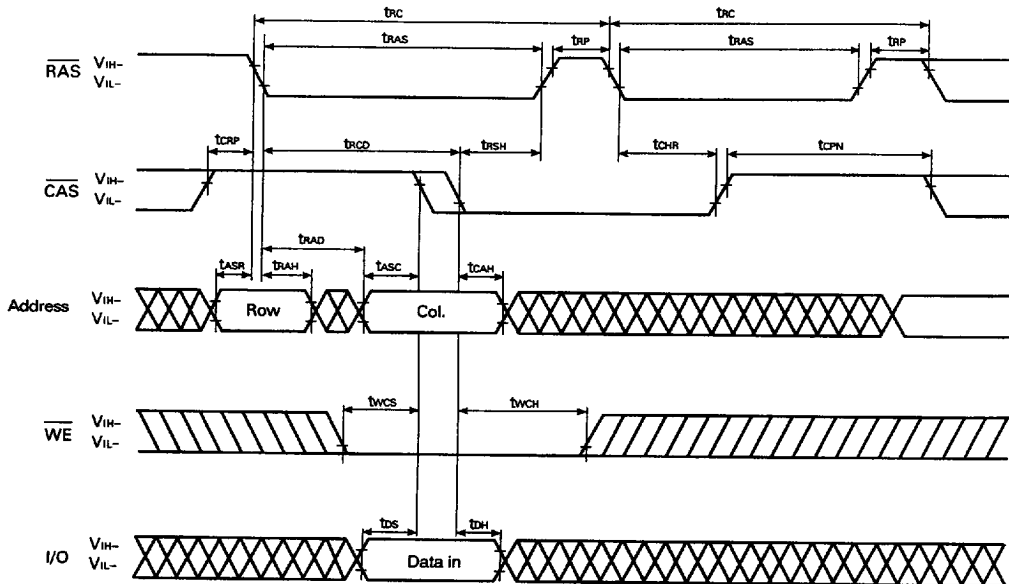

Remark $\overline{OE}$: Don't care

Test Mode Set Cycle ($\overline{\text{WE}}$, $\overline{\text{CAS}}$ Before $\overline{\text{RAS}}$ Refresh Cycle)

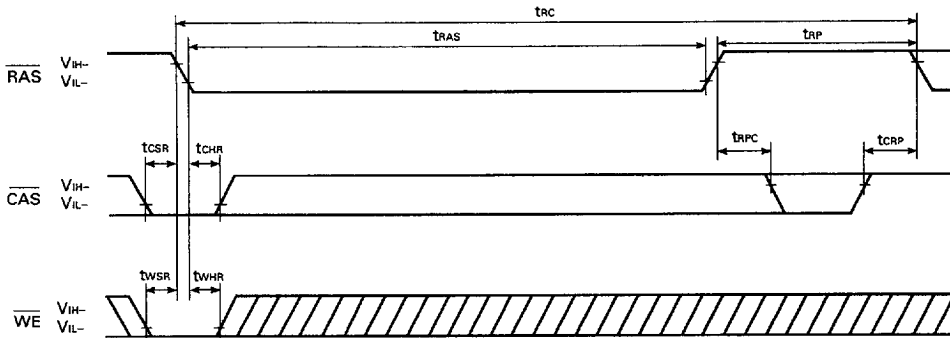

Remark Address, $\overline{\text{OE}}$: Don't care I/O : Hi-Z

Test Mode

By using the test mode, the test time can be reduced. The reason for this is that, the memory emulates the $\times 16$ -bit structure during test mode.

(1) Setting the mode

Executing the test mode cycle ($\overline{\text{WE}}$, $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycle) sets the test mode.

(2) Write/read operation

When either a "0" or a "1" is written to the input pin in test mode, this data is written to 16 bits of memory cell.

Next, when the data is read from the output pin at the same address, the cell can be checked.

Output = "1" : Normal write (all memory cells)

Output = "0" : Abnormal write

(3) Refresh


Refresh in the test mode must be performed with the $\overline{\text{RAS}}$ / $\overline{\text{CAS}}$ cycle or with the $\overline{\text{WE}}$, $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycle. The $\overline{\text{WE}}$, $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycle use the same counter as the $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh's internal counter.

(4) Mode Cancellation

The test mode is cancelled by executing one cycle of $\overline{\text{RAS}}$ only refresh cycle or $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycle.

Package Drawings

28 PIN PLASTIC TSOP (II) (400 mil)

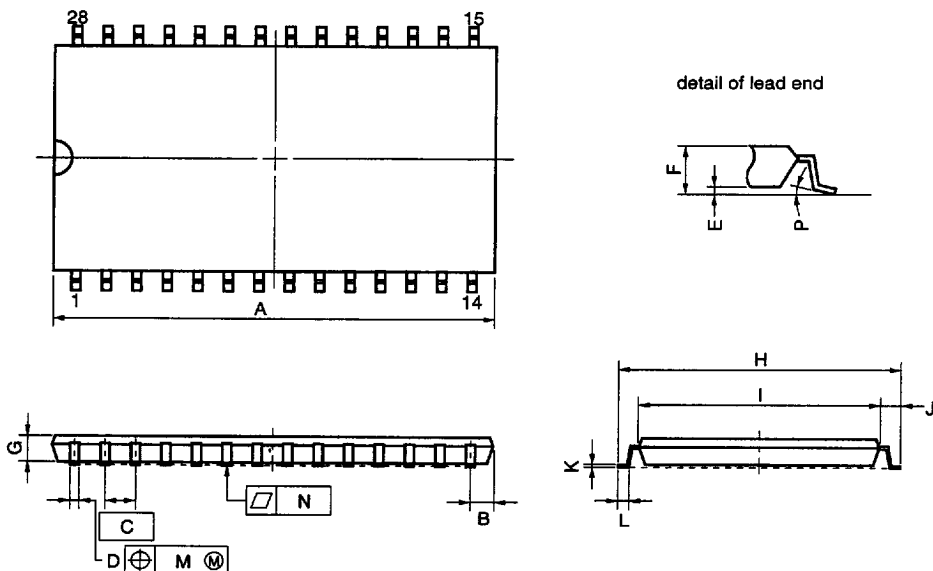


NOTE

Each lead centerline is located within 0.21 mm (0.009 inch) of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS	INCHES
A	18.63 MAX.	0.734 MAX.
B	1.075 MAX.	0.043 MAX.
C	1.27 (T.P.)	0.050 (T.P.)
D	0.42 ^{+0.08} _{-0.07}	0.017±0.003
E	0.1±0.05	0.004±0.002
F	1.2 MAX.	0.048 MAX.
G	0.97	0.038
H	11.76±0.2	0.463±0.008
I	10.16±0.1	0.400±0.004
J	0.8±0.2	0.031 ^{+0.009} _{-0.008}
K	0.145 ^{+0.025} _{-0.015}	0.006±0.001
L	0.5±0.1	0.020 ^{+0.004} _{-0.005}
M	0.21	0.008
N	0.10	0.004
P	3° ^{+7°} _{-3°}	3° ^{+7°} _{-3°}

S28G5-50-7JD3

28 PIN PLASTIC SOJ (400 mil)

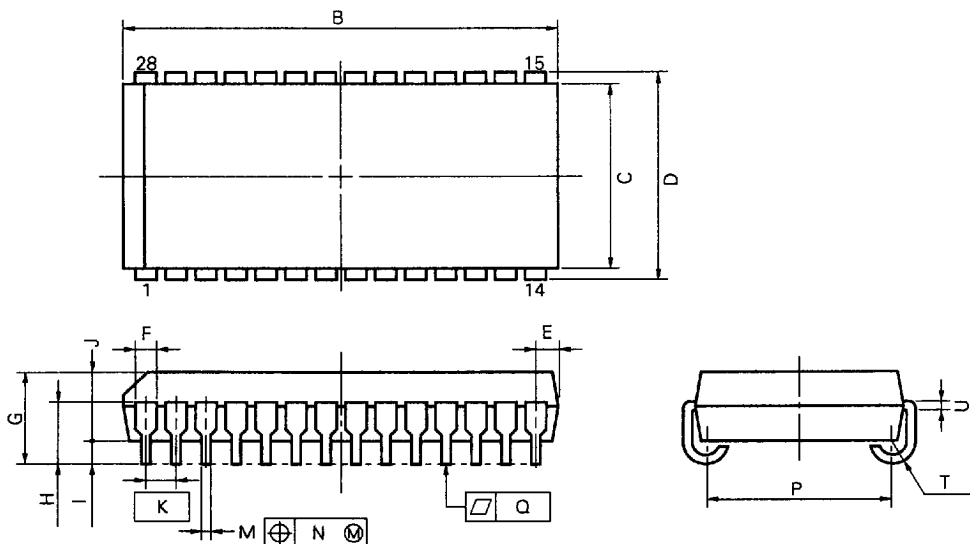

NOTE

Each lead centerline is located within 0.12 mm (0.005 inch) of its true position (T.P.) at maximum material condition.

P28LE-400A1

ITEM	MILLIMETERS	INCHES
B	18.67 ^{+0.2} _{-0.35}	0.735 ^{+0.008} _{-0.013}
C	10.16	0.400
D	11.18±0.2	0.440 ^{+0.008} _{-0.007}
E	1.08±0.15	0.043 ^{+0.008} _{-0.007}
F	0.74	0.029
G	3.5±0.2	0.138 ^{+0.008} _{-0.007}
H	2.545±0.2	0.100±0.008
I	0.8 MIN.	0.031 MIN.
J	2.6	0.102
K	1.27 (T.P.)	0.050 (T.P.)
M	0.40±0.10	0.016 ^{+0.004} _{-0.005}
N	0.12	0.005
P	9.40±0.20	0.370 ^{+0.008} _{-0.007}
Q	0.10	0.004
T	R 0.85	R 0.033
U	0.20 ^{+0.10} _{-0.05}	0.008 ^{+0.004} _{-0.002}

Recommended Soldering Conditions

The following conditions (see tables below and next page) must be met for soldering conditions of the μPD42S16800, 4216800, 42S17800, 4217800.

For more details, refer to our document "SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL" (IEI-1207).

Please consult with our sales offices in case other soldering process is used, or in case the soldering is done under different conditions.

Types of Surface Mount Device

μPD42S16800G5, 4216800G5, 42S17800G5, 4217800G5 : 28-pin plastic TSOP (III) (400 mil)

Soldering process	Soldering conditions	Symbol
Infrared ray reflow	Peak temperature of package surface : 235 °C or below, Reflow time : 30 seconds or below (210 °C or higher), Number of reflow processes : MAX. 2 Exposure limit ^{Note} : 7 days (10 hours pre-baking is required at 125 °C afterwards) [Remark] (1) Please start the second reflow process after the temperature, raised by the first reflow process, returns to normal. (2) Please avoid removing the residual flux with water after the first reflow process.	IR35-107-2
VPS	Peak temperature of package : 215 °C or below, Reflow time : 40 seconds or below (200 °C or higher), Number of reflow processes : MAX. 2 Exposure limit ^{Note} : 7 days (10 hours pre-baking is required at 125 °C afterwards) [Remark] (1) Please start the second reflow process after the temperature, raised by the first reflow process, returns to normal. (2) Please avoid removing the residual flux with water after the first reflow process.	VP15-107-2
Partial heating method	Terminal temperature : 300 °C or below, Time : 3 seconds or below (Per one side of the device).	_____

Note Exposure limit before soldering after dry-pack package is opened.

Storage conditions: 25 °C and relative humidity at 65 % or less.

Caution Do not apply more than one soldering method at any one time, except for "Partial heating method".

μPD42S16800LE, 4216800LE, 42S17800LE, 4217800LE : 28-pin plastic SOJ (400 mil)

Soldering process	Soldering conditions	Symbol
Infrared ray reflow	Peak temperature of package surface : 235 °C or below, Reflow time : 30 seconds or below (210 °C or higher), Number of reflow processes : MAX. 2 Exposure limit ^{Note} : 7 days (20 hours pre-baking is required at 125 °C afterwards) [Remark] (1) Please start the second reflow process after the temperature, raised by the first reflow process, returns to normal. (2) Please avoid removing the residual flux with water after the first reflow process.	IR35-207-2
VPS	Peak temperature of package : 215 °C or below, Reflow time : 40 seconds or below (200 °C or higher), Number of reflow processes : MAX. 2 Exposure limit ^{Note} : 7 days (20 hours pre-baking is required at 125 °C afterwards) [Remark] (1) Please start the second reflow process after the temperature, raised by the first reflow process, returns to normal. (2) Please avoid removing the residual flux with water after the first reflow process.	VP15-207-2
Partial heating method	Terminal temperature : 300 °C or below, Time : 3 seconds or below (Per one side of the device).	_____

Note Exposure limit before soldering after dry-pack package is opened.
Storage conditions: 25 °C and relative humidity at 65 % or less.

Caution Do not apply more than one soldering method at any one time, except for "Partial heating method".