

2.5V or 3.3V, 200-MHz, 12-Output Zero Delay Buffer

Features

- Output frequency range: 8.33MHz to 200MHz
- Input frequency range: 6.25MHz to 125MHz
- 2.5V or 3.3V operation
- Split 2.5V / 3.3V outputs
- $\pm 2\%$ (max) Output duty cycle variation
- 12 Clock outputs: drive up to 24 clock lines
- One feedback output
- Three reference clock inputs: LVPECL or LVCMOS
- 300pS (max) output-output skew
- Phase-locked loop (PLL) bypass mode
- 'SpreadTrak'
- Output enable/disable
- Pin-compatible with CY29773, MPC9773 and MPC973
- Industrial temperature range: -40°C to $+85^{\circ}\text{C}$
- 52pin 1.0mm TQFP package
- RoHS Compliance

The ASM5I9773 features one LVPECL and two LVCMOS reference clock inputs and provides 12 outputs partitioned in three banks of four outputs each. Each bank divides the VCO output per SEL(A:C) settings (see Table 2. Function Table (Configuration Controls)). These dividers allow output-to-input ratios of 8:1, 6:1, 5:1, 4:1, 3:1, 8:3, 5:2, 2:1, 5:3, 3:2, 4:3, 5:4, 1:1, and 5:6. Each LVCMOS-compatible output can drive 50 Ω series- or parallel-terminated transmission lines. For series-terminated transmission lines, each output can drive one or two traces, giving the device an effective fanout of 1:24.


The PLL is ensured stable, given that the VCO is configured to run between 200MHz to 500MHz. This allows a wide range of output frequencies, from 8MHz to 200MHz. For normal operation, the external feedback input FB_IN is connected to the feedback output FB_OUT. The internal VCO is running at multiples of the input reference clock set by the feedback divider (see Table 1. Frequency Table).

When PLL_EN is LOW, PLL is bypassed and the reference clock directly feeds the output dividers. This mode is fully static and the minimum input clock frequency specification does not apply.


Functional Description

The ASM5I9773 is a low-voltage high-performance 200MHz PLL-based zero delay buffer designed for high speed clock distribution applications.

Block Diagram

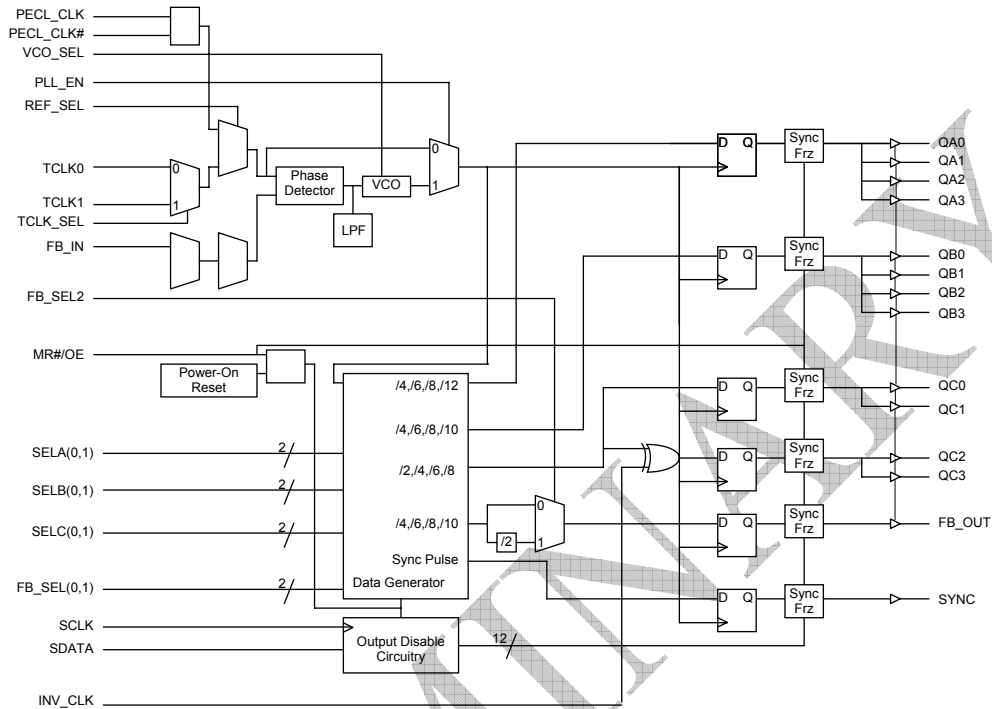

Pin Configuration

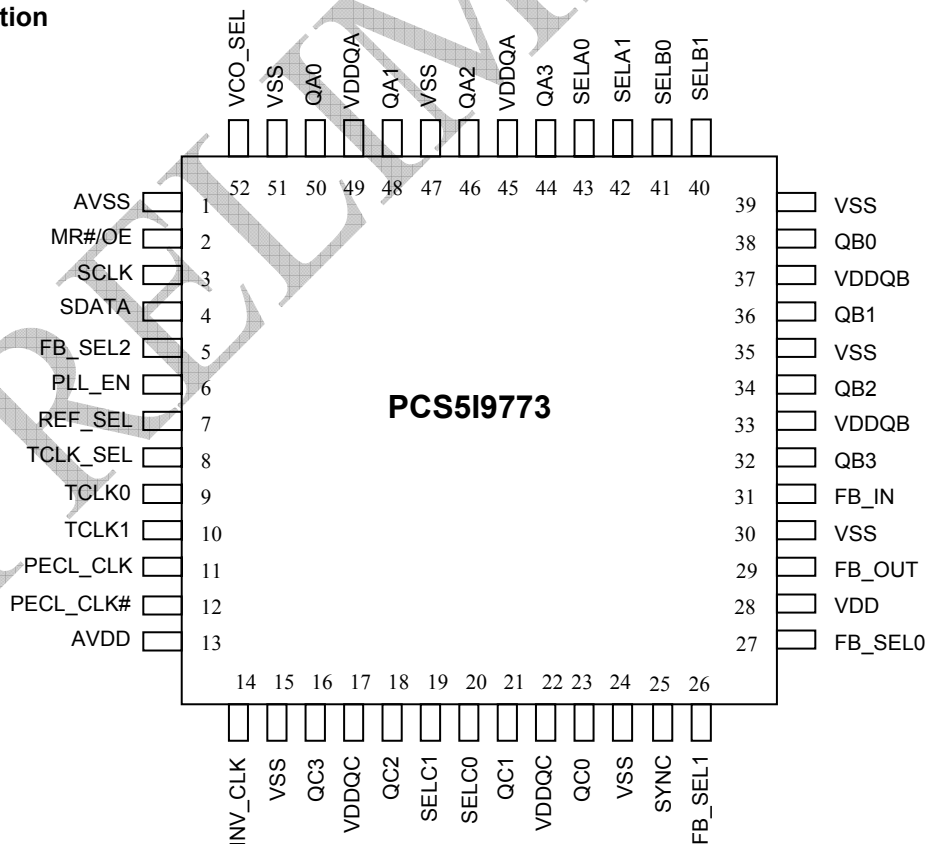

rev 0. 4
Pin Configuration¹

Pin	Name	I/O	Type	Description
11	PECL_CLK	I, PU	LVPECL	LVPECL reference clock input.
12	PECL_CLK#	I	LVPECL	LVPECL reference clock input.
9	TCLK0	I, PU	LVC MOS	LVC MOS/LVTTL reference clock input.
10	TCLK1	I, PU	LVC MOS	LVC MOS/LVTTL reference clock input.
44,46,48,50	QA(3:0)	O	LVC MOS	Clock output bank A.
32,34,36,38	QB(3:0)	O	LVC MOS	Clock output bank B.
16,18,21,23	QC(3:0)	O	LVC MOS	Clock output bank C.
29	FB_OUT	O	LVC MOS	Feedback clock output. Connect to FB_IN for normal operation.
31	FB_IN	I, PU	LVC MOS	Feedback clock input. Connect to FB_OUT for normal operation. This input should be at the same voltage rail as input reference clock. See Table 1. Frequency Table.
25	SYNC	O	LVC MOS	Synchronous pulse output. This output is used for system synchronization.
6	PLL_EN	I, PU	LVC MOS	PLL enable/bypass input. When Low, PLL is disabled/bypassed and the input clock connects to the output dividers.
2	MR#/OE	I, PU	LVC MOS	Master reset and Output enable/disable input. See Table 2. Function Table (Configuration Controls).
8	TCLK_SEL	I, PU	LVC MOS	LVC MOS Clock reference select input. See Table 2. Function Table (Configuration Controls).
7	REF_SEL	I, PU	LVC MOS	LVC MOS/LVPECL Reference select input. See Table 2. Function Table (Configuration Controls).
52	VCO_SEL	I, PU	LVC MOS	VCO Operating frequency select input. See Table 2. Function Table (Configuration Controls).
14	INV_CLK	I, PU	LVC MOS	QC(2,3) Phase selection input. See Table 2. Function Table (Configuration Controls).
5,26,27	FB_SEL(2:0)	I, PU	LVC MOS	Feedback divider select input. See Table 6.
42,43	SELA(1,0)	I, PU	LVC MOS	Frequency select input, Bank A. See Table 3. Function Table (Bank A).
40,41	SELB(1,0)	I, PU	LVC MOS	Frequency select input, Bank B. See Table 4. Function Table (Bank B).
19,20	SELC(1,0)	I, PU	LVC MOS	Frequency select input, Bank C. See Table 5. Function Table (Bank C).
3	SCLK	I, PU	LVC MOS	Serial clock input.
4	SDATA	I, PU	LVC MOS	Serial data input.
45,49	VDDQA	Supply	VDD	2.5V or 3.3V Power supply for bank A output clocks ^{2,3} .
33,37	VDDQB	Supply	VDD	2.5V or 3.3V Power supply for bank B output clocks ^{2,3} .
22,17	VDDQC	Supply	VDD	2.5V or 3.3V Power supply for bank C output clocks ^{2,3} .
13	AVDD	Supply	VDD	2.5V or 3.3V Power supply for PLL ^{2,3} .
28	VDD	Supply	VDD	2.5V or 3.3V Power supply for core and inputs ^{2,3} .
1	AVSS	Supply	Ground	Analog Ground.
15,24,30,35,39,47,51	VSS	Supply	Ground	Common Ground.

Notes:

1. PU = Internal pull up, PD = Internal pull down.
2. A 0.1µF bypass capacitor should be placed as close as possible to each positive power pin (<0.2"). If these bypass capacitors are not close to the pins their high frequency filtering characteristics will be cancelled by the lead inductance of the traces.
3. AVDD and VDD pins must be connected to a power supply level that is at least equal or higher than that of VDDQA, VDDQB, and VDDQC power supply pins.

rev 0. 4

‘SpreadTrak’

Many systems being designed now utilize a technology called Spread Spectrum Frequency Timing Generation. PCS5I9773 is designed so as not to filter off the Spread Spectrum feature of the Reference Input, assuming it exists.

When a zero delay buffer is not designed to pass the Spread Spectrum feature through, the result is a significant amount of tracking skew which may cause problems in the systems requiring synchronization.

Table 1: Frequency Table

Feedback Output Divider	VCO	Input Frequency Range (AVDD = 3.3V)	Input Frequency Range (AVDD = 2.5V)
÷4	Input Clock * 4	50MHz to 125MHz	50MHz to 95MHz
÷6	Input Clock * 6	33.3MHz to 83.3MHz	33.3MHz to 63.3MHz
÷8	Input Clock * 8	25MHz to 62.5MHz	25MHz to 47.5MHz
÷10	Input Clock * 10	20MHz to 50MHz	20MHz to 38MHz
÷12	Input Clock * 12	16.6MHz to 41.6MHz	16.6MHz to 31.6MHz
÷16	Input Clock * 16	12.5MHz to 31.25MHz	12.5MHz to 23.75MHz
÷20	Input Clock * 20	10MHz to 25MHz	10 MHz to 19MHz
÷24	Input Clock * 24	8.3MHz to 20.8MHz	8.3MHz to 15.8MHz
÷32	Input Clock * 32	6.25MHz to 15.625MHz	6.25MHz to 11.8MHz
÷40	Input Clock * 40	5MHz to 12.5MHz	5MHz to 9.5MHz

Table 2. Function Table (Configuration Controls)

Control	Default	0	1
REF_SEL	1	TCLK0, TCLK1	PECL_CLK
TCLK_SEL	1	TCLK0	TCLK1
VCO_SEL	1	VCO÷2 (low input frequency range)	VCO÷1 (high input frequency range)
PLL_EN	1	Bypass mode, PLL disabled. The input clock connects to the output dividers	PLL enabled. The VCO output connects to the output dividers
INV_CLK	1	QC2 and QC3 are in phase with QC0 and QC1	QC2 and QC3 are inverted (180° phase shift) with respect to QC0 and QC1
MR#/OE	1	Outputs disabled (three-state) and reset of the device. During reset/output disable the PLL feedback loop is open and the VCO running at its minimum frequency. The device is reset by the internal power-on reset (POR) circuitry during power-up.	Outputs enabled

Table 3. Function Table (Bank A)

VCO_SEL	SELA1	SELA0	QA(0:3)
0	0	0	÷8
0	0	1	÷12
0	1	0	÷16
0	1	1	÷24
1	0	0	÷4
1	0	1	÷6
1	1	0	÷8
1	1	1	÷12

Table 5. Function Table (Bank C)

VCO_SEL	SELC1	SELC0	QC(0:3)
0	0	0	÷4
0	0	1	÷8
0	1	0	÷12
0	1	1	÷16
1	0	0	÷2
1	0	1	÷4
1	1	0	÷6
1	1	1	÷8

Table 4. Function Table (Bank B)

VCO_SEL	SELB1	SELB0	QB(0:3)
0	0	0	÷8
0	0	1	÷12
0	1	0	÷16
0	1	1	÷20
1	0	0	÷4
1	0	1	÷6
1	1	0	÷8
1	1	1	÷10

Table 6. Function Table (FB_OUT)

VCO_SEL	FB_SEL2	FB_SEL1	FB_SEL0	FB_OUT
0	0	0	0	÷8
0	0	0	1	÷12
0	0	1	0	÷16
0	0	1	1	÷20
0	1	0	0	÷16
0	1	0	1	÷24
0	1	1	0	÷32
0	1	1	1	÷40
1	0	0	0	÷4
1	0	0	1	÷6
1	0	1	0	÷8
1	0	1	1	÷10
1	1	0	0	÷8
1	1	0	1	÷12
1	1	1	0	÷16
1	1	1	1	÷20

Absolute Maximum Conditions

Parameter	Description	Condition	Min	Max	Unit
VDD	DC Supply Voltage		-0.3	5.5	V
VDD	DC Operating Voltage	Functional	2.375	3.465	V
V _{IN}	DC Input Voltage	Relative to VSS	-0.3	VDD+ 0.3	V
V _{OUT}	DC Output Voltage	Relative to VSS	-0.3	VDD+ 0.3	V
V _{TT}	Output termination Voltage			VDD ÷2	V
I _{LU}	Latch-up Immunity	Functional	200		mA
R _{PS}	Power Supply Ripple	Ripple Frequency < 100 kHz		150	mVp-p
T _S	Temperature, Storage	Non-functional	-65	+150	°C
T _A	Temperature, Operating Ambient	Functional	-40	+85	°C
T _J	Temperature, Junction	Functional		+150	°C
Θ _{JC}	Dissipation, Junction to Case	Functional		23	°C/W
Θ _{JA}	Dissipation, Junction to Ambient	Functional		55	°C/W
ESD _H	ESD Protection (Human Body Model)		2000		V
FIT	Failure in Time	Manufacturing test		10	ppm

Note: These are stress ratings only and are not implied for functional use. Exposure to absolute maximum ratings for prolonged periods of time may affect device reliability.

DC Electrical Specifications ($V_{DD} = 2.5V \pm 5\%$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$)

Parameter	Description	Condition	Min	Typ	Max	Unit
V_{IL}	Input Voltage, Low	LVC MOS			0.7	V
V_{IH}	Input Voltage, High	LVC MOS	1.7		$V_{DD} + 0.3$	V
V_{PP}	Peak-Peak Input Voltage	LVPECL	250		1000	mV
V_{CMR}	Common Mode Range ⁴	LVPECL	1.0		$V_{DD} - 0.6$	V
V_{OL}	Output Voltage, Low ⁵	$I_{OL} = 15\text{ mA}$			0.6	V
V_{OH}	Output Voltage, High ⁵	$I_{OH} = -15\text{ mA}$	1.8			V
I_{IL}	Input Current, Low ⁵	$V_{IL} = V_{SS}$			-100	μA
I_{IH}	Input Current, High ⁶	$V_{IL} = V_{DD}$			100	μA
I_{DDA}	PLL Supply Current	AVDD only		5	10	mA
I_{DDQ}	Quiescent Supply Current	All VDD pins except AVDD			8	mA
I_{DD}	Dynamic Supply Current	Outputs loaded @ 100MHz		135		mA
C_{IN}	Input Pin Capacitance			4		pF
Z_{OUT}	Output Impedance		14	18	22	Ω

DC Electrical Specifications ($V_{DD} = 3.3V \pm 5\%$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$)

Parameter	Description	Condition	Min	Typ	Max	Unit
V_{IL}	Input Voltage, Low	LVC MOS			0.8	V
V_{IH}	Input Voltage, High	LVC MOS	2.0		$V_{DD} + 0.3$	V
V_{PP}	Peak-Peak Input Voltage	LVPECL	250		1000	mV
V_{CMR}	Common Mode Range ⁴	LVPECL	1.0		$V_{DD} - 0.6$	V
V_{OL}	Output Voltage, Low ⁵	$I_{OL} = 24\text{ mA}$			0.55	V
		$I_{OL} = 12\text{ mA}$			0.30	
V_{OH}	Output Voltage, High ⁵	$I_{OH} = -24\text{ mA}$	2.4			V
I_{IL}	Input Current, Low ⁶	$V_{IL} = V_{SS}$			-100	μA
I_{IH}	Input Current, High ⁶	$V_{IL} = V_{DD}$			100	μA
I_{DDA}	PLL Supply Current	AVDD only		5	10	mA
I_{DDQ}	Quiescent Supply Current	All VDD pins except AVDD			8	mA
I_{DD}	Dynamic Supply Current	Outputs loaded @ 100MHz		225		mA
C_{IN}	Input Pin Capacitance			4		pF
Z_{OUT}	Output Impedance		12	15	18	Ω

Notes:

- V_{CMR} (DC) is the crossing point of the differential input signal. Normal operation is obtained when the crossing point is within the V_{CMR} range and the input swing is within the V_{PP} (DC) specification.
- Driving one 50 Ω parallel terminated transmission line to a termination voltage of V_{TT} . Alternatively, each output drives up to two 50 Ω series terminated transmission lines.
- Inputs have pull-up or pull-down resistors that affect the input current.

AC Electrical Specifications ($V_{DD} = 2.5V \pm 5\%$, $T_A = -40^\circ C$ to $+85^\circ C$)⁷

Parameter	Description	Condition	Min	Typ	Max	Unit
f_{VCO}	VCO Frequency		200		380	MHz
f_{in}	Input Frequency	$\div 4$ Feedback	50		95	MHz
		$\div 6$ Feedback	33.3		63.3	
		$\div 8$ Feedback	25		47.5	
		$\div 10$ Feedback	20		38	
		$\div 12$ Feedback	16.6		31.6	
		$\div 16$ Feedback	12.5		23.75	
		$\div 20$ Feedback	10		19	
		$\div 24$ Feedback	8.3		15.8	
		$\div 32$ Feedback	6.25		11.8	
		$\div 40$ Feedback	5		9.5	
		Bypass mode (PLL_EN = 0)	0		200	
f_{refDC}	Input Duty Cycle		25		75	%
V_{PP}	Peak-Peak Input Voltage	LVPECL	500		1000	mV
V_{CMR}	Common Mode Range ⁸	LVPECL	1.2		$V_{DD} - 0.6$	V
t_r, t_f	TCLK Input Rise/FallTime	0.7V to 1.7V			1.0	nS
f_{MAX}	Maximum Output Frequency	$\div 2$ Output	100		190	MHz
		$\div 4$ Output	50		95	
		$\div 6$ Output	33.3		63.3	
		$\div 8$ Output	25		47.5	
		$\div 10$ Output	20		38	
		$\div 12$ Output	16.6		31.6	
		$\div 16$ Output	12.5		23.75	
		$\div 20$ Output	10		19	
		$\div 24$ Output	8.3		15.8	
f_{SCLK}	Serial Clock Frequency				20	MHz
DC	Output Duty Cycle	$f_{MAX} < 100MHz$	47.5		52.5	%
		$f_{MAX} > 100MHz$	45		55	
t_r, t_f	Output Rise/Fall times	0.6V to 1.8V	0.1		1.0	nS
$t_{(p)}$	Propagation Delay (static phase offset)	TCLK to FB_IN	-125		125	pS
		PCLK to FB_IN	-125		125	

Notes:

7. AC characteristics apply for parallel output termination of 50Ω to V_{TT} . Outputs are at same supply voltage unless otherwise stated. Parameters are guaranteed by characterization and are not 100% tested.

8. V_{CMR} (AC) is the crosspoint of the differential input signal. Normal AC operation is obtained when the crosspoint is within the V_{CMR} range and the input swing lies within the V_{PP} (AC) specification. Violation of V_{CMR} or V_{PP} impacts static phase offset $t_{(p)}$.

rev 0. 4
AC Electrical Specifications ($V_{DD} = 2.5V \pm 5\%$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$)⁹

Parameter	Description	Condition	Min	Typ	Max	Unit
$t_{sk(O)}$	Output-to-Output Skew	Skew within Bank A			75	pS
		Skew within Bank B			100	
		Skew within Bank C			150	
$t_{sk(B)}$	Bank-to-Bank Skew				400	pS
$t_{PLZ, HZ}$	Output Disable Time				10	nS
$t_{PZL, ZH}$	Output Enable Time				10	nS
BW	PLL Closed Loop Bandwidth (-3dB)	± 4 Feedback		1.3 - 2.0		MHz
		± 6 Feedback		0.7 - 1.3		
		± 8 Feedback		0.9 - 1.3		
		± 10 Feedback		0.6 - 1.1		
		± 12 Feedback		0.6 - 0.9		
		± 16 Feedback		0.4 - 0.6		
		± 20 Feedback		0.6 - 0.9		
$t_{JIT(CC)}$	Cycle-to-Cycle Jitter	Same frequency (125MHz) RMS (1σ)		7	30	pS
		Same frequency			150	
		Multiple frequencies			435	
$t_{JIT(PER)}$	Period Jitter	Same frequency (125MHz) RMS (1σ)		6	30	pS
		Same frequency		45	75	
		Multiple frequencies			235	
$t_{JIT(\phi)}$	I/O Phase Jitter				150	pS
t_{LOCK}	Maximum PLL Lock Time				1	mS

AC Electrical Specifications ($V_{DD} = 3.3V \pm 5\%$, $T_A = -40^{\circ}C$ to $+85^{\circ}C$)⁹

Parameter	Description	Condition	Min	Typ	Max	Unit
f_{VCO}	VCO Frequency		200		500	MHz
f_{in}	Input Frequency	± 4 Feedback	50		125	MHz
		± 6 Feedback	33.3		83.3	
		± 8 Feedback	25		62.5	
		± 10 Feedback	20		50	
		± 12 Feedback	16.6		41.6	
		± 16 Feedback	12.5		31.25	
		± 20 Feedback	10		25	
		± 24 Feedback	8.3		20.8	
		± 32 Feedback	6.25		15.625	
		± 40 Feedback	5		12.5	
		Bypass mode (PLL_EN = 0)	0		200	
f_{refDC}	Input Duty Cycle		25		75	%
V_{PP}	Peak-Peak Input Voltage	LVPECL	500		1000	mV
V_{CMR}	Common Mode Range ⁸	LVPECL	1.2		$V_{DD}-0.9$	V
t_r, t_f	TCLK Input Rise/FallTime	0.8V to 2.0V			1.0	nS

Notes:

9. AC characteristics apply for parallel output termination of 50 Ω to V_{TT} . Outputs are at same supply voltage unless otherwise stated. Parameters are guaranteed by characterization and are not 100% tested.

rev 0. 4

AC Electrical Specifications (VDD = 3.3V $\pm$ 5%, TA = -40°C to +85°C)¹⁰

Parameter	Description	Condition	Min	Typ	Max	Unit
f _{MAX}	Maximum Output Frequency	$\div$ 2 Output	100		200	MHz
		$\div$ 4 Output	50		125	
		$\div$ 6 Output	33.3		83.3	
		$\div$ 8 Output	25		62.5	
		$\div$ 10 Output	20		50	MHz
		$\div$ 12 Output	16.6		41.6	
		$\div$ 16 Output	12.5		31.25	
		$\div$ 20 Output	10		25	
		$\div$ 24 Output	8.3		20.8	
f _{SCLK}	Serial Clock Frequency		-		20	MHz
DC	Output Duty Cycle	f _{MAX} < 100MHz	48		52	%
		f _{MAX} > 100MHz	45		55	
t _r , t _f	Output Rise/Fall times	0.55V to 2.4V	0.1		1.0	nS
t(ϕ)	Propagation Delay (static phase offset)	TCLK to FB_IN, same VDD	-125		125	pS
		PCLK to FB_IN, same VDD	-125		125	
t _{sk(O)}	Output-to-Output Skew	Skew within Bank A			75	pS
		Skew within Bank B			100	
		Skew within Bank C			150	
t _{sk(B)}	Bank-to-Bank Skew				325	pS
t _{PLZ} , HZ	Output Disable Time				8	nS
t _{PZL} , ZH	Output Enable Time				8	nS
BW	PLL Closed Loop Bandwidth (-3 dB)	$\div$ 4 Feedback		1.3–2.0		MHz
		$\div$ 6 Feedback		0.7–1.3		
		$\div$ 8 Feedback		0.9–1.3		
		$\div$ 10 Feedback		0.6–1.1		
		$\div$ 12 Feedback		0.6–0.9		
		$\div$ 16 Feedback		0.4–0.6		
		$\div$ 20 Feedback		0.6–0.9		
t _{JIT(CC)}	Cycle-to-Cycle Jitter	Same frequency (125MHz) RMS (1 σ)		7	30	pS
		Same frequency			100	
		Multiple frequencies			375	
t _{JIT(PER)}	Period Jitter	Same frequency (125MHz) RMS (1 σ)		6	30	pS
		Same frequency		45	75	
		Multiple frequencies			225	
t _{JIT(ϕ)}	I/O Phase Jitter	I/O same VDD			150	pS
t _{LOCK}	Maximum PLL Lock Time				1	mS

Notes:

10. AC characteristics apply for parallel output termination of 50 Ω to V_{TT}. Outputs are at same supply voltage unless otherwise stated. Parameters are guaranteed by characterization and are not 100% tested.

SYNC Output

In situations where output frequency relationships are not integer multiples of each other the SYNC output provides a signal for system synchronization. The PCS5I9773 monitors the relationship between the QA and the QC output clocks. It provides a low going pulse, one period in duration, one period prior to the coincident rising edges of the QA and QC outputs. The duration and the placement

of the pulse depend on the higher of the QA and QC output frequencies. The following timing diagram illustrates various waveforms for the SYNC output. Note that the SYNC output is defined for all possible combinations of the QA and QC outputs even though under some relationships the lower frequency clock could be used as a synchronizing signal.

PRELIMINARY

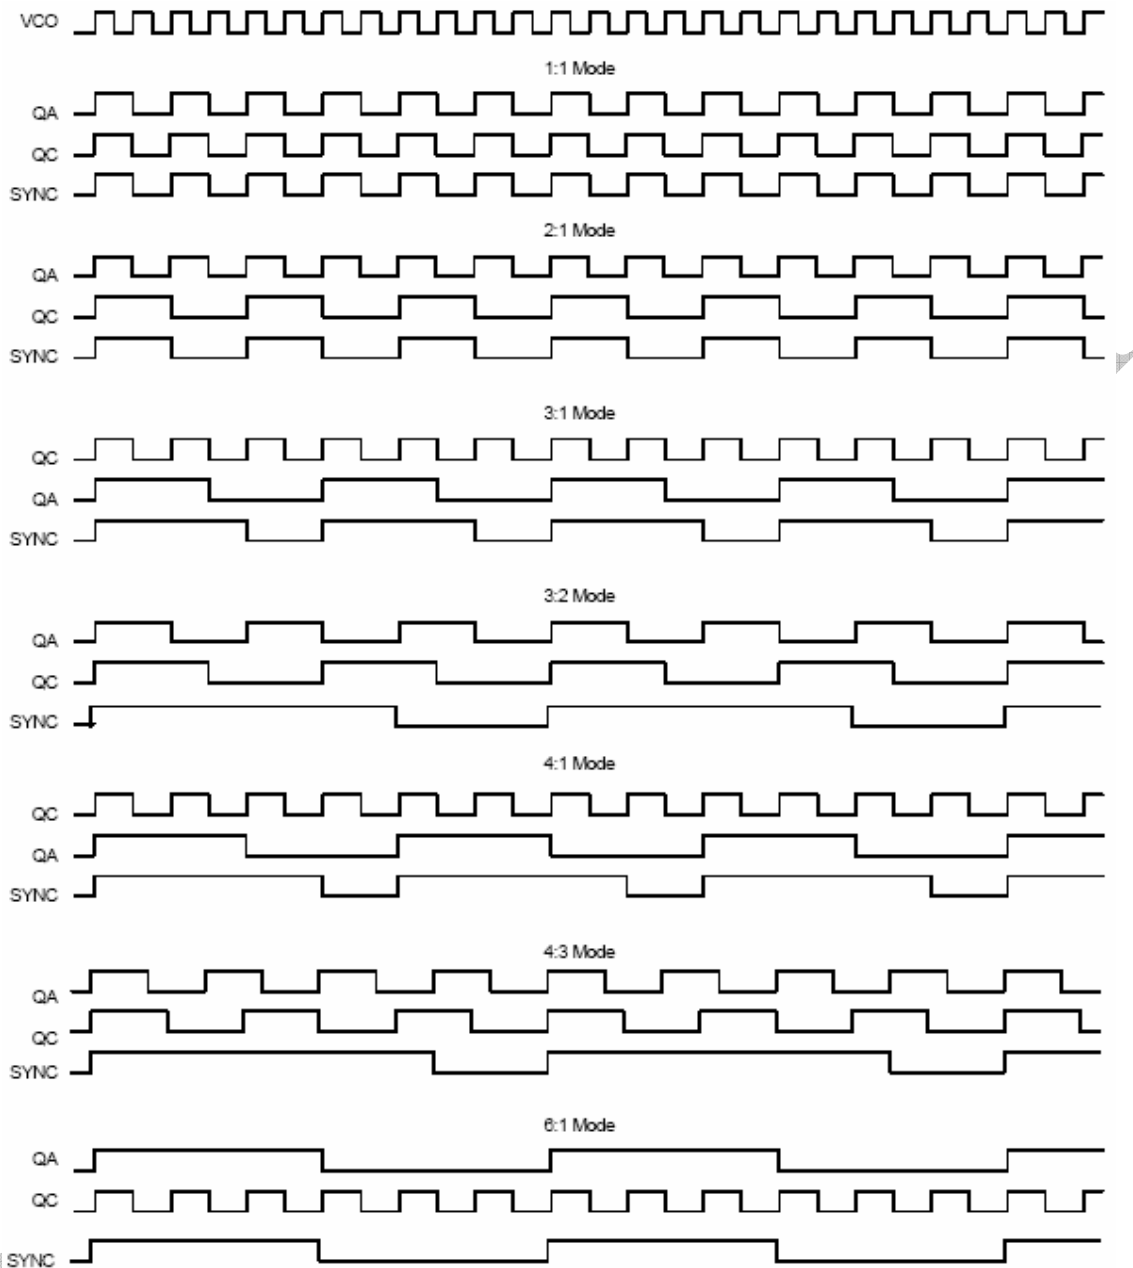


Figure 1.

Power Management

The individual output enable/freeze control of the PCS5I9773 allows the user to implement unique power management schemes into the design. The outputs are stopped in the logic '0' state when the freeze control bits are activated. The serial input register contains one programmable freeze enable bit for 12 of the 14 output


clocks. The QC0 and FB_OUT outputs can not be frozen with the serial port, this avoids any potential lock up situation, should an error occur in the loading of the serial data. An output is frozen when a logic '0' is programmed and enabled when a logic '1' is written. The enabling and

rev 0. 4

freezing of individual outputs is done in such a manner as to eliminate the possibility of partial “runt” clocks.

The serial input register is programmed through the SDATA input by writing a logic ‘0’ start bit followed by 12

NRZ freeze enable bits. The period of each SDATA bit equals the period of the free running SCLK signal. The SDATA is sampled on the rising edge of SCLK.



D0-D3 are the control bits for QA0-QA3, respectively
D4-D7 are the control bits for QB0-QB3, respectively
D8-D10 are the control bits for QC1-QC3, respectively
D11 is the control bit for SYNC

Figure 2.

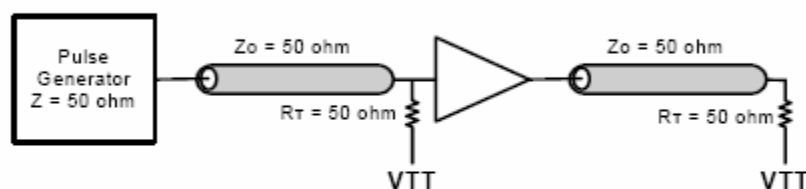


Figure 3. LVCMOS_CLK AC Test Reference for $V_{DD} = 3.3V/2.5V$

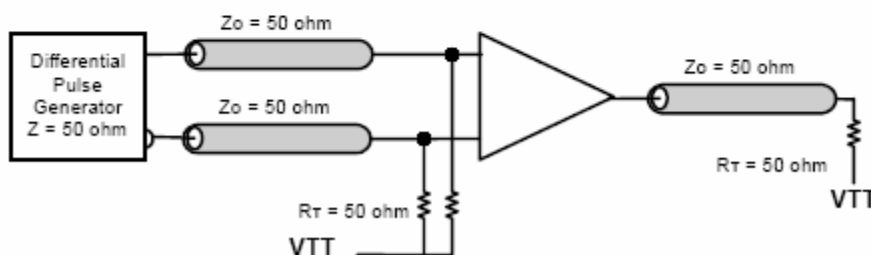


Figure 4. PECL_CLK AC Test Reference for $V_{DD} = 3.3V/2.5V$

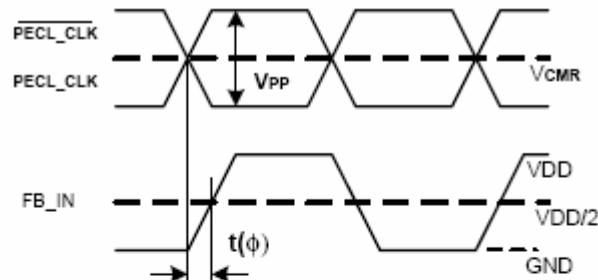


Figure 5. LVPECL Propagation Delay $t(\phi)$, Static Phase Offset

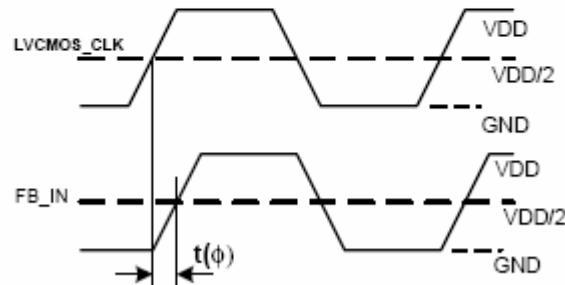


Figure 6. LVCMOS Propagation Delay $t(\phi)$, Static Phase Offset

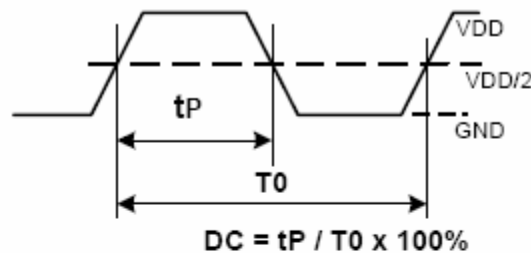


Figure 7. Output Duty Cycle (DC)


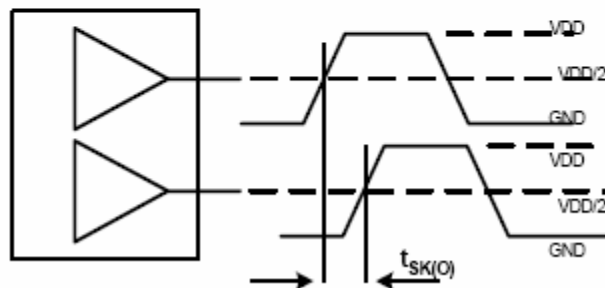


Figure 8. Output-to-Output Skew, $t_{sk(O)}$

Package Information

52-lead TQFP Package

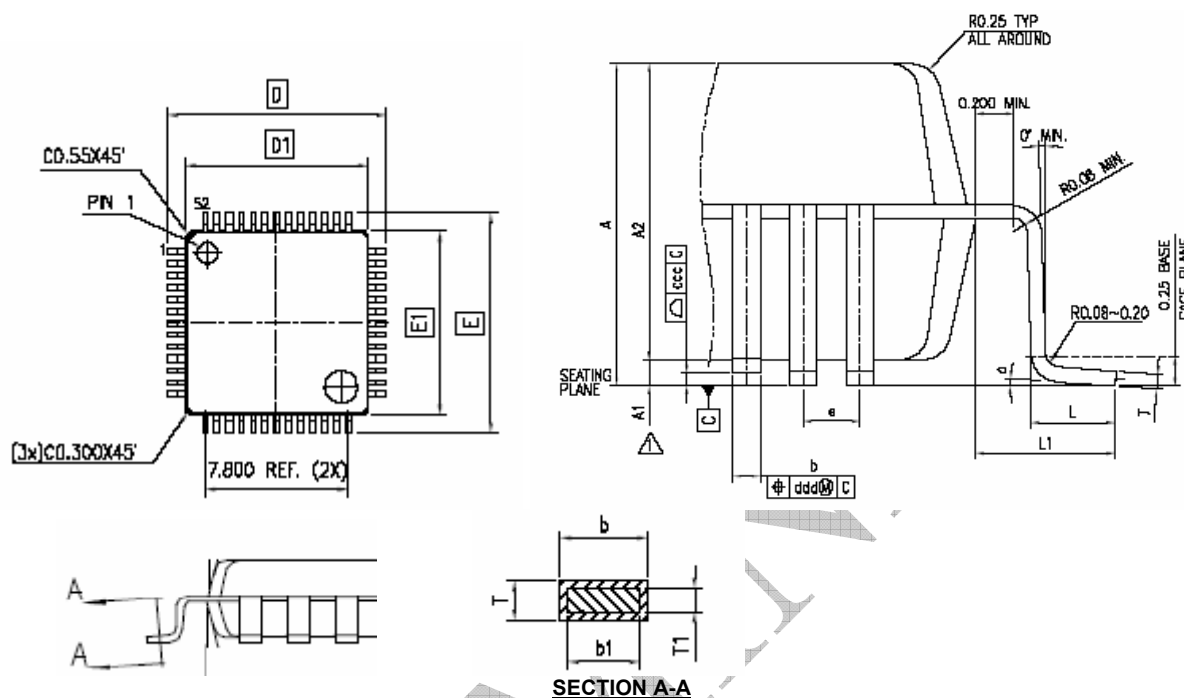

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A		0.0472	...	1.2
A1	0.0020	0.0059	0.05	0.15
A2	0.0374	0.0413	0.95	1.05
D	0.4646	0.4803	11.8	12.2
D1	0.3898	0.3976	9.9	10.1
E	0.4646	0.4803	11.8	12.2
E1	0.3898	0.3976	9.9	10.1
L	0.0177	0.0295	0.45	0.75
L1	0.03937 REF		1.00 REF	
T	0.0035	0.0079	0.09	0.2
T1	0.0038	0.0062	0.097	0.157
b	0.0102	0.0150	0.26	0.38
b1	0.0106	0.0130	0.27	0.33
R0	0.0031	0.0079	0.08	0.2
a	0°	7°	0°	7°
e	0.0256 BASE		0.65 BASE	

Ordering Information

Part Number	Marking	Package Type	Operating Range
PCS5P9773G-52-ET	PCS5P9773G	52-pin TQFP, Tray, Green	Industrial
PCS5P9773G-52-ER	PCS5P9773G	52-pin TQFP – Tape and Reel, Green	Industrial
PCS5I9773G-52-ET	PCS5I9773G	52-pin TQFP, Tray, Green	Industrial
PCS5I9773G-52-ER	PCS5I9773G	52-pin TQFP – Tape and Reel, Green	Industrial

Device Ordering Information

PCS5I9773G-52-ET

R = Tape & reel, T = Tube or Tray

O = SOT
 S = SOIC
 T = TSSOP
 A = SSOP
 V = TVSOP
 B = BGA
 Q = QFN

U = MSOP
 E = TQFP
 L = LQFP
 U = MSOP
 P = PDIP
 D = QSOP
 X = SC-70

DEVICE PIN COUNT

G = GREEN PACKAGE, LEAD FREE, and RoHS

PART NUMBER

X = Automotive (-40C to +125C)
 I = Industrial (-40C to +85C)
 P or n/c = Commercial (0C to +70C)

1 = Reserved
 2 = Non PLL based
 3 = EMI Reduction
 4 = DDR support products
 5 = STD Zero Delay Buffer

6 = Power Management
 7 = Power Management
 8 = Power Management
 9 = Hi Performance
 0 = Reserved

PULSECORE SEMICONDUCTOR MIXED SIGNAL PRODUCT



PulseCore Semiconductor Corporation
1715 S. Bascom Ave Suite 200
Campbell, CA 95008
Tel: 408-879-9077
Fax: 408-879-9018
www.pulsecoresemi.com

Copyright © PulseCore Semiconductor
All Rights Reserved
Preliminary Information
Part Number: PCS5I9773
Document Version: 0.4

Note: This product utilizes US Patent # 6,646,463 Impedance Emulator Patent issued to PulseCore Semiconductor, dated 11-11-2003

© Copyright 2006 PulseCore Semiconductor Corporation. All rights reserved. Our logo and name are trademarks or registered trademarks of PulseCore Semiconductor. All other brand and product names may be the trademarks of their respective companies. PulseCore reserves the right to make changes to this document and its products at any time without notice. PulseCore assumes no responsibility for any errors that may appear in this document. The data contained herein represents PulseCore's best data and/or estimates at the time of issuance. PulseCore reserves the right to change or correct this data at any time, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warranty to any user or customer. PulseCore does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of PulseCore products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as express agreed to in PulseCore's Terms and Conditions of Sale (which are available from PulseCore). All sales of PulseCore products are made exclusively according to PulseCore's Terms and Conditions of Sale. The purchase of products from PulseCore does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of PulseCore or third parties. PulseCore does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of PulseCore products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify PulseCore against all claims arising from such use