

# DVS-355M

## Embedded/Mobile Digital Video Platform with Intel Core Duo Mobile Processor



### Features

- Up to 6 channel composite inputs that can share a total frame rate of 60/50 fps
- Fanless design within sealed construction
- Supports Intel® Core™ Duo Mobile Processor
- x86 architecture for easy application development & integration
- Anti-vibration, anti-shock design to ensure maximum reliability
- Wide power source (9 ~ 30V DC)
- CardBus interface for optional mobile communication module
- Supports Window® 2000/XP with driver and SDK



### Introduction


The DVS-355M provides the digital video market a perfect solution for applications in harsh environments. The DVS-355M is the smallest industrial grade PC-based system that supports 6 camera inputs. The x86 open platform eases application software integration. It is designed for installation in any mission-critical environment with its fanless, anti-vibration and anti-shock protection. A wide power range of 9 to 30 V DC can protect the system from power surges while used on vehicles. These features combined with TV-OUT, WLAN, CardBus interface make the DVS-355M the best solution for embedded/mobile applications.

### Specifications

Video System	Video Standard	Composite for NTSC/PAL
	Video Input	6 channels share a total of 60 fps
	Encoding	Up to 60 fps@D1 resolution with software encoding
	Capture Resolution	Up to D1 resolution - 720 x 480 (NTSC) / 768 x 576 (Full PAL)
	Total Capture Frame Rate	60/50 fps (NTSC/PAL)
	Image Processing	Hardware adjustment of hue, contrast, saturation, and brightness
	Data Output Format	YUY2 planar formats supported
Processor & System	CPU	Intel Core Duo U2500 1.2GHz Mobile Processor
	Chipset	Intel 945GM / ICH7M-DH
	L2 Cache	2M
	BIOS	AWARD 4-Mbit BIOS
	Front Side Bus	667 MHz
Memory	Technology	Dual channel DDR2 533/667
	Max. Capacity	2 GB
	Socket	2 x 200-pin SODIMM
Graphics	Chipset	Intel Graphics Media Accelerator 950
	Memory Size	Shared system memory up to 224 MB
	Resolution	Up to 2048 x 1536 at 75 Hz
Ethernet	Interface	Gigabit LAN Controller
	Controller	Marvell 88E8053
	Connector	2 x RJ-45
Storage	IDE-0	2.5" HDD Tray
	IDE-1	CompactFlash socket for type I/II
I/O Interface	DVI	1 (DVI - I connector , digital signal output only)
	VGA	1 (D-sub 15-pin)
	LAN	Dual Gigabit LAN (RJ-45)
	USB	4 (USB 2.0 compliant, 480Mbps)
	Audio	AC97 - Line-out, Mic-in, Line-in
	Serial	COM1 - RS-232, COM2 - RS-232
	PS/2	1 (For keyboard and mouse with Y cable)
	CardBus	1 x slot
	Mini-PCI	1 (For Integrated WLAN module)
	TV Out	S-video and Composite video
Power Requirement	Management	APM 1.2, ACPI supported
	Power Consumption	Average 15 W, Maximum 49 W
	Input Voltage	9 ~ 30 V <sub>DC</sub> , Typical 9 V <sub>DC</sub> @ 5.4 A, 19 V <sub>DC</sub> @ 2.9 A
	Others	Support Boot on Power failure and schedule boot up function
Watchdog Timer	Output	Interrupt, system reset
	Interval	Programmable 1 ~ 255 sec.

## Dimensions

Unit: mm (inch)

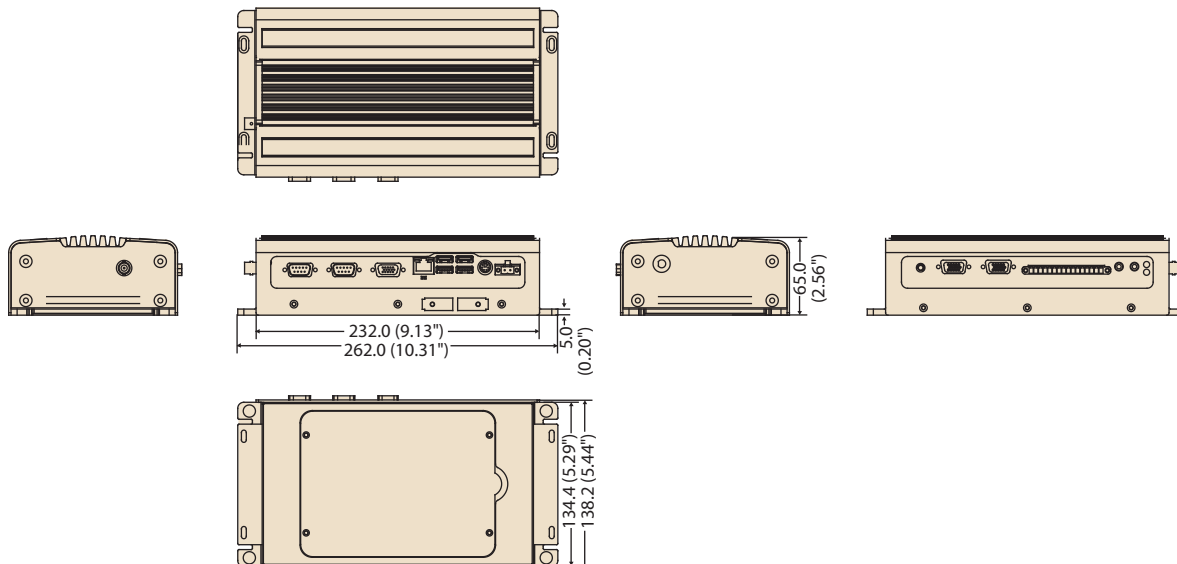

## Specifications

Physical Characteristics	Mounting	DIN-rail mounting and desk / wall mounting
	Dimensions (W x H x D)	232 x 65 x 138.4 mm (9.1" x 2.5" x 5.4")
	Weight	2.3 kg / 5.07 lb
Environment	Temperature	-10 ~ 45° C (14 ~ 113° F), Operating
	Temperature (with industrial grade components)	-15 ~ 55° C (5 ~ 131° F), Operating
	Relative Humidity	95% @ 40° C (non-condensing), Operating
	Vibration Resistance	1 Grms, IEC 60068-2-64, Random, 5-500 Hz, 1 Oct/min, 1hr/axis
	Shock Resistance	40G, IEC 60068-2-27, half sine, 11 ms, Operating
Software Development Kit	Operation System	Supports Microsoft Windows XP with SP2, XP embedded and Win2000 with SP4.
	Demo Program	Complete demo program with VC++ sample code for reference

## Ordering Information

Part Number	Memory	WLAN	Video Input
DVS-355-MU25E	N/A	N/A	6 channels
DVS-355-ZU25E	N/A	802.11 b/g	N/A
DVS-355-SU25E	N/A	N/A	N/A

## Power Cord Options

Part Number	Description
1700001947	2-pin 180 cm, USA
1700001948	2-pin 180 cm, Europe
9689071001	3-pin 180 cm, USA
9689071002	3-pin 180 cm, Europe

## Optional Items

### 2.5" Hard Drive Options

Part Number	RPM	Type	Capacity
96ND60G-I-FJ4K1	4200	IDE Parallel-ATA	60 GB
96ND80G-I-FJ4K1	4200	IDE Parallel-ATA	80 GB

### Power Adapter Options

Part Number	Description
1757000222	AC-to-DC Adapter 2-pin DC 19 V/3.42 A/65 W, with Phoenix Power Plug
9689000450	AC-to-DC Adapter 3-pin DC19V/3.16A/ 60W

### Industrial-Grade CompactFlash Card Options

Part Number	Capacity	Operating Temperature
96FMCFI-512M-ET-AP	512 MB	-40 ~ 85° C (-40 ~ 185° F)
96FMCFI-1G-ET-AP	1 GB	-40 ~ 85° C (-40 ~ 185° F)

## Packing List

Part Number	Description	Qty
2013000000	2 year warranty card	X 1
2062S35000	Driver CD	X 1
1700001394	DC Jack with 2-pin pluggable terminal block	X 1
1700060202	Y cable of KB and PS/2 Mouse	X 1
1700005791	Video In Cable D-Sub to BNC (DVS-355-MU25E only)	X 1