

**Triple-Balanced Mixer**

**MY50/MY50C**

V2


**Features**

- LO 2.0 to 26 GHz
- RF 2.0 to 26 GHz
- IF 1.0 to 15 GHz
- LO Drive +10 dBm (nominal)
- High Compression Point
- Very Wide Bandwidth

**Description**

MY50 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.

**Product Image**

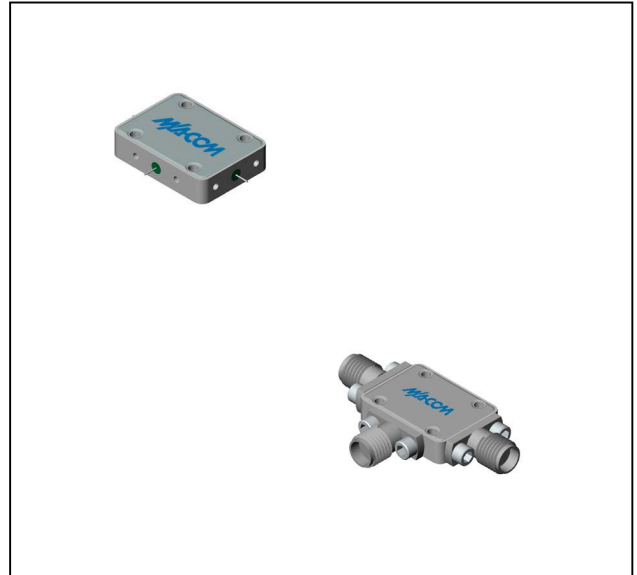

**Ordering Information**

Part Number	Package
MY50	Versapac
MY50C	SMA Connectorized

**Electrical Specifications:  $Z_0 = 50\Omega$   $Lo = +10$  dBm (Downconverter Application only)**

Parameter	Test Conditions	Units	Typical	Guaranteed	
				+25°C	-54° to +85°C
SSB Conversion Loss (max)	$fR = 2.5$ to 18 GHz, $fL = 2$ to 18 GHz, $fl = 2$ to 10 GHz	dB	7.5	9.5	10.0
	$fR = 2$ to 18 GHz, $fL = 2$ to 26 GHz, $fl = 2$ to 12 GHz		8.0	10.5	
	$fR = 2$ to 26 GHz, $fL = 2$ to 26 GHz, $fl = 1$ to 15 GHz		9.0	11.5	
SSB Noise Figure (max)	Within 1 db of conversion loss	dB	—	—	—
Isolation, L to R (min)	$fL = 2$ to 3 GHz	dB	30	20	18
	$fL = 3$ to 26 GHz		22	15	13
Isolation, L to I (min)	$fL = 2$ to 7 GHz	dB	30	20	18
	$fL = 7$ to 26 GHz		22	15	13
1 dB Conversion Comp.	$fL = +10$ dBm	dBm	+5		
Input IP3	$fR1 = 5$ GHz at -6 dBm, $fR2 = 5.01$ GHz at -6 dBm, $fL = 8$ GHz at +10 dBm $fR1 = 25$ GHz at -6 dBm, $fR2 = 25.01$ GHz at -6 dBm, $fL = 15$ GHz at +10 dBm	dBm	+15 +15		


**Triple-Balanced Mixer**

**MY50/MY50C**



V2

**Typical Performance Curves**


**Conversion Loss vs. LO Drive Level**

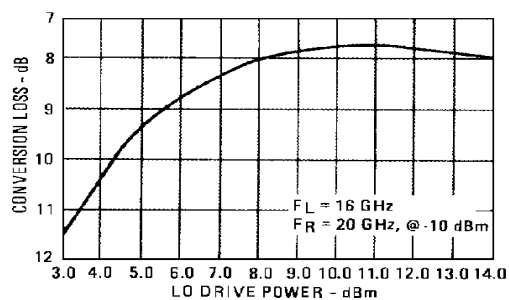


**Isolation vs. Frequency**

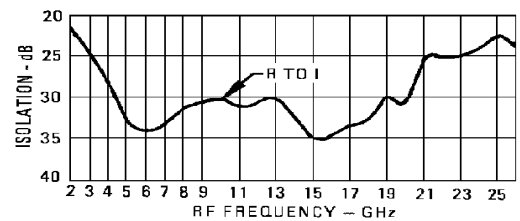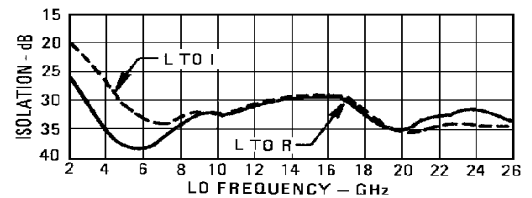




**Conversion Loss vs. Frequency**

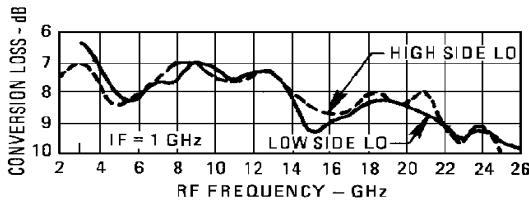


**R-Port VSWR**

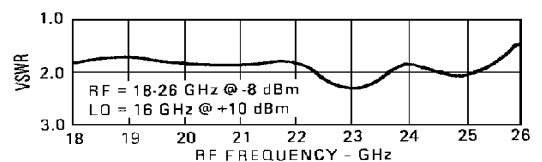

**Conversion Loss vs. Frequency**

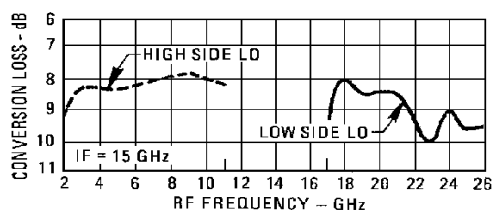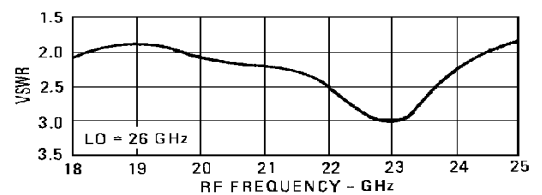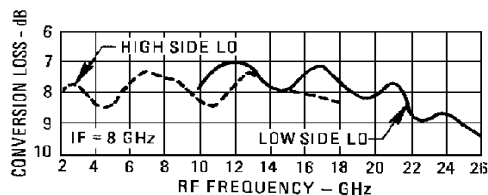

**L-Port VSWR**

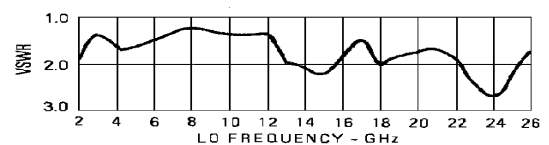

**Triple-Balanced Mixer**


**MY50/MY50C**

V2





**Absolute Maximum Ratings**

Parameter	Absolute Maximum
Operating Temperature	-54°C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+26 dBm max @ +25°C +22 dBm max @ +100°C
Peak Input Current	100 mA DC


**Outline Drawing: Versapac \***

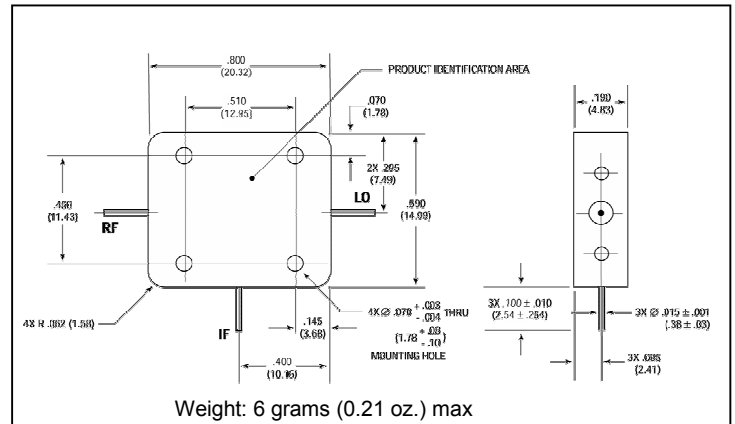

**I-Port VSWR**

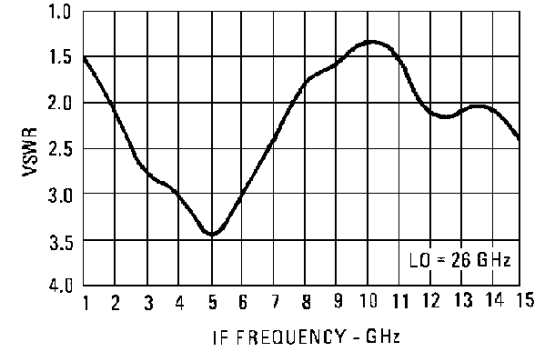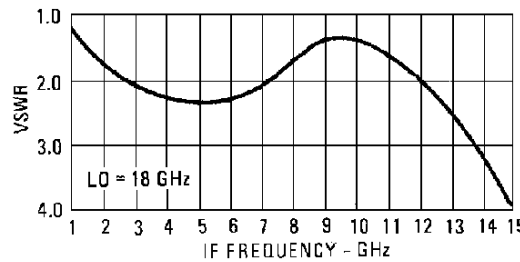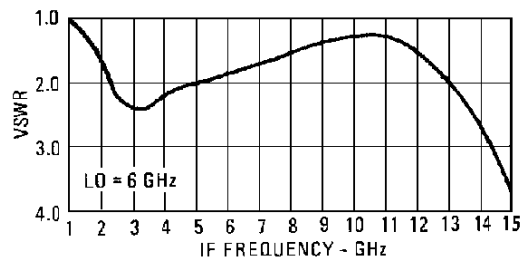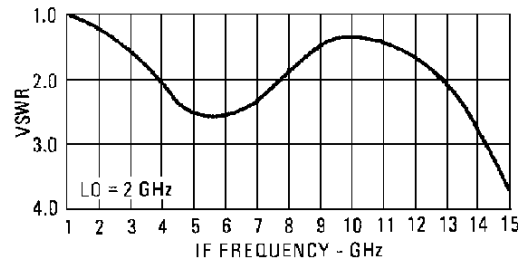

**Outline Drawing: SMA Connectorized \***

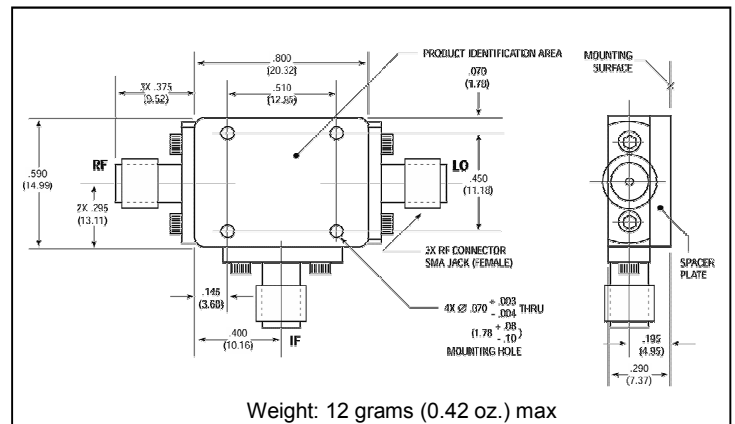

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.