

GaAs SPDT Reflective Switch

DC - 3 GHz with TTL/CMOS Control Input

SW-110

V3.00


Features

- 1 dB Compression Point: +39 dBm Typ., -8V Control
- IP_3 : +65 dBm, Typ., -8V Control
- Insertion Loss: 0.45 dB Typ.
- Low Power Consumption
- Fast Switching Speed
- 50 Ω Nominal Impedance

Description

M/A-COM's SW-110 is a GaAs MMIC SPDT reflective switch with an integral silicon ASIC driver. This device is in a 16 lead ceramic surface mount package. These switches exhibit excellent performance and repeatability from DC to 3.0 GHz, with very low DC power dissipation. The SW-110 is ideally suited for RF/IF communications applications. Environmental screening is available. Contact the factory for information.

CR-9

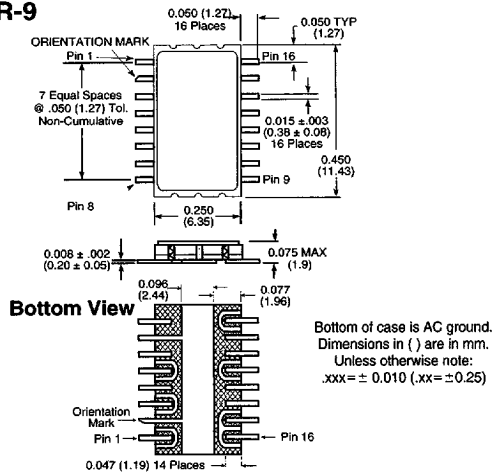

Electrical Specifications, $T_A = +25^\circ\text{C}^{1,2,3}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Reference Insertion Loss	DC - 0.5 GHz DC - 1.0 GHz DC - 2.0 GHz DC - 3.0 GHz	dB dB dB dB			0.6 0.7 0.9 1.1
Isolation	DC - 0.5 GHz DC - 1.0 GHz DC - 2.0 GHz DC - 3.0 GHz	dB dB dB dB	40 35 24 18		
VSWR	DC - 0.5 GHz DC - 1.0 GHz DC - 2.0 GHz DC - 3.0 GHz				1.2:1 1.4:1 1.4:1 1.5:1
Trise, Tfall Ton, Toff Transients	10% to 90% 1.3V Control to 90/10% RF In-band (peak-peak)	nS nS mV		12 35 30	
1 dB Compression	Input Power, 0.1 dB, -5V Control Input Power, 1.0 dB, -5V Control Input Power, 0.1 dB, -8V Control Input Power, 1.0 dB, -8V Control	0.9 GHz 0.9 GHz 0.9 GHz 0.9 GHz		+32.5 +32.5 +32.5 +39.5	
Input IP_3	For two-tone input power up to +10 dBm -5V Control -8V Control	0.9 GHz 0.9 GHz 0.9 GHz		+61 +65	
V_{CC} V_{EE}		V V	4.5 -8.0	5.0	5.5 -5.0
I_{CC}	$V_{CC} = 4.5$ to 5.5 V $V_{ctl} = 0$ to 0.8 V, or $V_{CC} - 2.1$ V to V_{CC}	mA			1.0
I_{EE}	$V_{EE} = -5.0$ to -8.0 V	mA			1.0
V_{ctl} V_{ctl}	Logic 0 (TTL) Logic 1 (TTL)	V V	0.0 2.0		0.8 5.0
Input Leakage Current (Low) Input Leakage Current (High)	0 to 0.8 V 2.0 to 5.0 V	μ A μ A			1.0 1.0

1. All specifications apply when operated with bias voltages of +5 V for V_{CC} and -5.0 V to -8.0 V for V_{EE} , and 50 Ω impedance at all RF ports unless otherwise specified.
2. For this switch to meet the guaranteed specifications, it is necessary to have a DC return on either RF1 or RF2. The DC return can be either a 10k Ω resistor, or an RF choke.
3. High power (greater than 1W) handling specifications apply to cold switching only. For input powers under 1 W, hot switching can be used.

Specifications Subject to Change Without Notice.

16-56

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

5642205 0003581 302

Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Input Power	+35 dBm
0.05 GHz	
0.5 - 3.0 GHz	
-5V Control	+36 dBm
-8V Control	+39 dBm
Power Dissipation ^{2,3}	2.0W
Control Voltage	-0.5 V to V_{CC} to 0.5 V
Operating Temperature	-55°C to +125°C
Storage Temperature	-65°C to +150°C
Junction Temperature	+175°C
Thermal Resistance ^{2,3} θ_{JC}	+50°C/W

1. Operation of this device above any one of these parameters may cause permanent damage.
2. $T_{case} = 25^\circ\text{C}$, where T_{case} is the temperature at the bottom of the case.
3. Special consideration must be given to the mounting of the switch to minimize the thermal resistance. The bottom of the case should be thermally attached to the mounting surface to maintain the junction temperature under the absolute maximum rating.

Truth Table

Control Inputs	Condition of Switch	
	RF Common to Each RF Port	
C1	RF1	RF2
Low	On	Off
High	Off	On

0 = TTL Low



1 = TTL High

Ordering Information⁴


Part Number	Package
SW-110 PIN	Ceramic

4. Contact the factory for standard or custom screening requirements.



Typical Performance

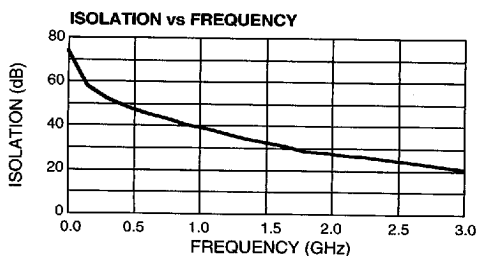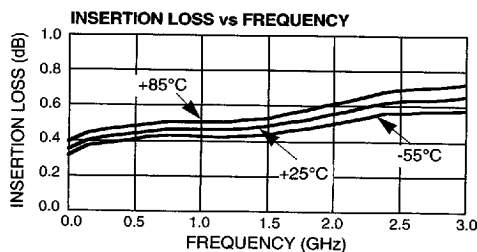

Functional Schematic (Top View)

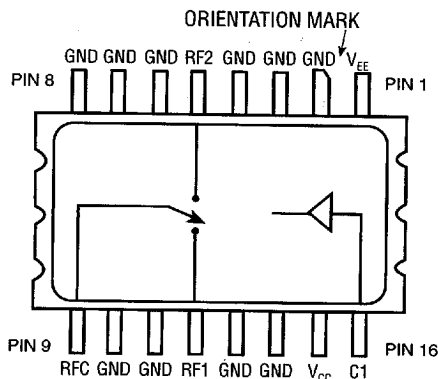Two Tone IP₃ Measurements

Bias Voltage	Input Power for Each Tone (dBm)	3rd Order Intermodulation Products (dBc)	IP ₃ (dBm)	Second Harmonic (dBc)
0, -5V	+27	-34	+44	-61
0, -6V	+27	-49	+51	-61
0, -7V	+27	-64	+59	-63
0, -8V	+27	-65	+59	-63
0, -5V	+28	-30	+43	-58
0, -6V	+28	-41	+48	-58
0, -7V	+28	-52	+54	-57
0, -8V	+28	-60	+58	-57
0, -5V	+29	-28	+43	-54
0, -6V	+29	-34	+46	-54
0, -7V	+29	-44	+51	-54
0, -8V	+29	-52	+55	-54
0, -5V	+30	-26	+43	-52
0, -6V	+30	-32	+46	-51
0, -7V	+30	-38	+49	-51
0, -8V	+30	-44	+52	-51

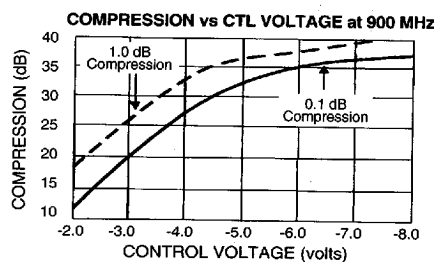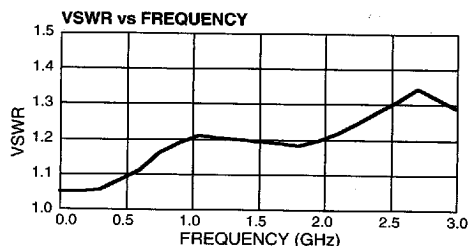

M/A-COM, Inc.

Specifications Subject to Change Without Notice.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
 Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020

16-57

5642205 0003582 249